



# Viz Engine Administrator's Guide

Product Version 3.3





**Copyright © 2013 Vizrt.** All rights reserved.

No part of this software, documentation or publication may be reproduced, transcribed, stored in a retrieval system, translated into any language, computer language, or transmitted in any form or by any means, electronically, mechanically, magnetically, optically, chemically, photocopied, manually, or otherwise, without prior written permission from Vizrt.

Vizrt specifically retains title to all Vizrt software. This software is supplied under a license agreement and may only be installed, used or copied in accordance to that agreement.

### **Disclaimer**

Vizrt provides this publication “as is” without warranty of any kind, either expressed or implied.

This publication may contain technical inaccuracies or typographical errors. While every precaution has been taken in the preparation of this document to ensure that it contains accurate and up-to-date information, the publisher and author assume no responsibility for errors or omissions. Nor is any liability assumed for damages resulting from the use of the information contained in this document.

Vizrt’s policy is one of continual development, so the content of this document is periodically subject to be modified without notice. These changes will be incorporated in new editions of the publication. Vizrt may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time.

Vizrt may have patents or pending patent applications covering subject matters in this document. The furnishing of this document does not give you any license to these patents.

### **Technical Support**

For technical support and the latest news of upgrades, documentation, and related products, visit the Vizrt web site at [www.vizrt.com](http://www.vizrt.com).

### **Last Updated**

December 10, 2013

# Contents

- 1 Introduction ..... 1
  - 1.1 Document Structure .....1
  - 1.2 Related Documents .....1
  - 1.3 Contact Vizrt .....2
  
- 2 Requirements ..... 4
  - 2.1 General Requirements .....4
  - 2.2 Hardware Requirements .....4
  - 2.3 Software Requirements .....5
    - 2.3.1 Viz Anchor ..... 5
    - 2.3.2 Viz Artist ..... 5
    - 2.3.3 Viz Content Pilot ..... 6
    - 2.3.4 Viz Engine ..... 11
    - 2.3.5 Viz Gateway ..... 12
    - 2.3.6 Viz Graphic Hub ..... 13
    - 2.3.7 Media Sequencer ..... 13
    - 2.3.8 Viz Trio ..... 14
    - 2.3.9 Viz Video Hub ..... 15
    - 2.3.10 Vizrt Maps ..... 15
  - 2.4 Shared Data .....16
  - 2.5 Ports and Connections .....16
    - 2.5.1 Port Numbers ..... 17
    - 2.5.2 Multiplexing Ports ..... 20
  
- 3 Software Setup ..... 21
  - 3.1 Prerequisites .....21
  - 3.2 Supported Hardware Options .....22
  - 3.3 Installing Viz .....22
  - 3.4 Adding a License .....23
  
- 4 Getting Started ..... 25
  - 4.1 Viz Command Line Options .....26
  
- 5 On Air Mode ..... 28
  - 5.1 Director Control Panel .....29
  - 5.2 Control Buttons .....30
  - 5.3 Performance .....30
    - 5.3.1 Performance Analyzer ..... 31
    - 5.3.2 Performance Bar ..... 32
  - 5.4 System Information .....33
  - 5.5 License Information .....34
  
- 6 Configuring Viz ..... 35

6.1	Audio Channels .....	36
6.2	Audio Setup .....	40
6.3	Bubble Information .....	41
6.4	Camera .....	42
6.5	CGP Panasonic .....	43
6.6	Communication .....	44
6.7	Clock Formats .....	45
6.8	Database .....	46
6.9	Font Options .....	47
6.10	Global Input .....	49
6.11	Import 3D Options .....	50
6.12	Image File Name Convert .....	51
6.13	Maps .....	52
6.14	Matrox .....	53
6.14.1	General .....	53
6.14.2	VideoOut .....	55
6.14.3	VideoIn .....	58
6.14.4	ClipIn .....	62
6.15	Memory Management .....	65
6.16	Multi Platform Suite .....	66
6.17	Path Aliases .....	67
6.18	Output Format .....	68
6.18.1	CGP Panasonic Output Format .....	69
6.19	Plugins .....	70
6.20	Render Options .....	71
6.21	Scene Default Values .....	73
6.22	Spaceball .....	75
6.23	User Interface .....	76
6.23.1	Colors .....	76
6.23.2	Various .....	77
6.23.3	Shortcuts .....	77
6.24	Video Board .....	78
6.25	Video Clip .....	79
6.26	Video Input .....	80
6.27	Video Output .....	81
6.28	Video Preview .....	82
6.29	Viz Artist 2.x .....	82
6.30	Viz License Information .....	83
7	Graphic Cards .....	84
7.1	Two Graphic Cards .....	84
7.2	Driver Installation and Recommendations .....	86
7.2.1	Driver Installation .....	87
7.2.2	Driver Recommendations .....	89
7.2.3	NVIDIA Quadro FX1400 .....	90

7.2.4	NVIDIA Quadro FX1 500 .....	90
7.2.5	NVIDIA Quadro FX1 700 .....	90
7.2.6	NVIDIA Quadro FX1 800 .....	91
7.2.7	NVIDIA Quadro FX3400 .....	91
7.2.8	NVIDIA Quadro FX3700 .....	92
7.2.9	NVIDIA Quadro FX3800 .....	92
7.2.10	NVIDIA Quadro FX3800 SDI .....	92
7.2.11	NVIDIA Quadro 4000 .....	92
7.2.12	NVIDIA Quadro FX4000 .....	93
7.2.13	NVIDIA Quadro FX4000 SDI .....	93
7.2.14	NVIDIA Quadro FX4500 .....	94
7.2.15	NVIDIA Quadro FX4500 SDI .....	94
7.2.16	NVIDIA Quadro FX4600 .....	95
7.2.17	NVIDIA Quadro FX4600 SDI .....	95
7.2.18	NVIDIA Quadro FX4800 .....	95
7.2.19	NVIDIA Quadro FX4800 SDI .....	96
7.2.20	NVIDIA Quadro 5000 .....	96
7.2.21	NVIDIA Quadro FX5500 .....	96
7.2.22	NVIDIA Quadro FX5500 SDI .....	97
7.2.23	NVIDIA Quadro FX5600 .....	97
7.2.24	NVIDIA Quadro FX5600 SDI .....	97
7.2.25	NVIDIA Quadro FX5800 .....	98
7.2.26	NVIDIA Quadro 6000 .....	98
7.3	Standard PC Recommendations .....	98
7.4	Viz Video Wall Recommendations .....	98
<b>8</b>	<b>Video Cards .....</b>	<b>100</b>
8.1	BlueFish444 SD Lite Pro Express .....	100
8.1.1	Connectors .....	101
8.1.2	Driver Installation .....	101
8.2	DVS Centaurus II .....	102
8.2.1	Connectors .....	102
8.2.2	Supported Codecs .....	106
8.2.3	Video Card Installation .....	106
8.2.4	Driver Installation .....	108
8.2.5	Licensing .....	111
8.3	Matrox X.mio 1 and X.mio 2 .....	115
8.3.1	Connectors .....	115
8.3.2	Supported Codecs .....	123
8.3.3	Video Card Installation .....	166
8.3.4	Driver Installation .....	172
8.3.5	Watchdog .....	177
8.3.6	Licensing .....	177
8.4	Matrox DSX LE2/CG .....	178

9	Audio in Viz .....	180
9.1	Overview .....	180
9.1.1	Audio Channels .....	181
9.1.2	Matrox Inputs .....	181
9.1.3	Targa Inputs .....	181
9.1.4	DirectShow Filters .....	181
9.1.5	DirectSound Input .....	181
9.1.6	Live Input Routing .....	182
9.1.7	Clip Routing .....	182
9.1.8	DirectSound Audio Card .....	182
9.1.9	Targa and Matrox output channels .....	182
9.2	Device Recognition and Selection .....	183
9.3	Timing Behavior and Delay Settings .....	183
9.3.1	Channel Device and Channel Track settings .....	185
9.4	Channel Setup and Clip Channel Routing .....	185
9.5	Audio Plug-in .....	187
9.5.1	Audio Clip Mixing Modes .....	187
9.6	Clip Formats .....	189
9.7	Speaker Names .....	190
9.8	Matrox and Targa Interface .....	190
10	Legacy Cards.....	192
10.1	Legacy Video Cards .....	192
10.1.1	BlueFish444 Iridium SD .....	192
10.1.2	Digital Voodoo D1 Desktop .....	194
10.1.3	Digital Voodoo DeepBlue LT .....	194
10.1.4	Digital Voodoo Red Devil V3 alias IO/2020 .....	195
10.1.5	Pinnacle Targa 3200 .....	195
10.2	LPT Controller for a Viz License Dongle .....	196
11	Glossary.....	197

---

# 1 Introduction

This guide will guide you through the setup and installation of Viz Engine. It will also explain settings available through its configuration user interface.

This section contains information on the following topics:

- [Document Structure](#)
- [Related Documents](#)
- [Contact Vizrt](#)

---

## 1.1 Document Structure

Section 1 gives an introduction to the guide, and summarizes the document content.

Section 2 describes general requirements for Viz and key software components that either integrate with Viz or is a part of the Vizrt workflow.

Section 3 describes the basic setup procedures, installation options, the Viz license dongle and how to activate Viz.

Section 4 describes how to start Viz using shortcut keys and command line options.

Sections 5 and 6 describe the Viz Engine On Air user interface, and Viz Config user interface, respectively.

Sections 7 and 8 gives an overview of the supported graphics and video cards, how to install them, what driver versions are supported and so on.

Section 9 gives an overview of the Viz Engine audio system. It also provides some information and procedures on how to enable and configure it.

Section 10 gives an overview of legacy cards, and describes additional hardware installation procedures that are not part of the default Viz setup.

Section 11 gives an extensive glossary with simple and to the point explanations of keywords and acronyms referenced throughout the document.

---

## 1.2 Related Documents

1. Viz Artist User's Guide: Contains information on how to install Viz Engine and create graphics scenes in Viz Artist.
2. Viz Artist Script reference: Contains information on how to create scripts for a scene.
3. Viz Engine Plug-in SDK reference: Contains information on how to create a customized Viz plug-in.

---

## 1.3 Contact Vizrt

We encourage your suggestions and feedback regarding the product and this documentation. Our support E-mail address is [support@vizrt.com](mailto:support@vizrt.com). You are also welcome to use the web-based support at [www.vizrt.com](http://www.vizrt.com), or to contact your local Vizrt support person by telephone.



---

## 2 Requirements

This section describes the different requirements, such as hardware, software, access rights and general policies for a number of software components that can be integrated with Viz.

-----  
**IMPORTANT!** Always check release notes for information on supported versions.  
-----

For more in depth system information, see the respective user and administrator guides.

This section contains information on the following topics:

- [General Requirements](#)
- [Hardware Requirements](#)
- [Software Requirements](#)
- [Shared Data](#)
- [Ports and Connections](#)

---

### 2.1 General Requirements

There are some general requirements for any Vizrt system to run. These requirements apply when setting up a complete system with integration to other Vizrt and third party software products:

- All machines should be part of the same domain.
- Users of the Vizrt machines should ideally be separated in at least two groups, administrators and designers/operators.
- Most machines running desktop applications must be logged in with sufficient privileges in order to run Vizrt programs, while services by default do not require users to be logged in.
- Vizrt servers must have static IP addresses.

-----  
**CAUTION!** Third party systems that provide Vizrt systems with files must only use Microsoft Windows operating system compatible characters as the file name.  
-----

- Vizrt has license restrictions on all Viz Engine and Viz Artist instances. To have an output of Vizrt generated graphics (preview and program channels), either an USB or parallel port dongle on the renderer machine is required.

---

### 2.2 Hardware Requirements

Hardware requirements vary depending on the system purchased; however, every system delivered by Vizrt has an accompanying hardware specification sheet that, for a new system, matches the [Software Requirements](#) .

For older hardware that are used with newer versions of Vizrt software (e.g. Viz Engine) it is always recommended to check against the current hardware

specifications for the new software version to make sure that the latest software can run on the old hardware specification.

Additional hardware must always be checked to see if it is compatible with existing hardware. For example, the GPI cards supported by Vizrt must fit in the Media Sequencer servers.

For more information on hardware specifications take contact with your local Vizrt representative or send an e-mail to [support@vizrt.com](mailto:support@vizrt.com).

---

## 2.3 Software Requirements

The following sections describe software requirements for the product described in this manual and a range of components that may be integrated with it. For more information see the following topics:

- [Viz Anchor](#)
- [Viz Artist](#)
- [Viz Content Pilot](#)
- [Viz Engine](#)
- [Viz Gateway](#)
- [Viz Graphic Hub](#)
- [Media Sequencer](#)
- [Viz Trio](#)
- [Viz Video Hub](#)
- [Vizrt Maps](#)

### 2.3.1 Viz Anchor

Viz Anchor is a Vizrt application targeted at the presenter in the studio. The application runs natively on Apple's iPad and allows users to control playlists with video and graphics directly from the handheld device.

Software	Viz Anchor 1.0 or later
Operating system	Apple iOS 3.2 or later
Network access	Uses the Bonjour protocol to automatically discover the Media Sequencer and Preview Server if the wireless router/switch allows it.
Hardware	iPad

### 2.3.2 Viz Artist

Viz Artist is an advanced real-time motion graphics authoring system for the creation of stunning real-time graphics. Built with an elegant and easy to use drag-and-drop user interface and sophisticated 3D animation and modeling tools, Viz Artist enables the digital artist to produce complex and engaging visual

content for broadcast, virtual sets, and visualization in less time and with greater creative freedom.

Software	Extra Viz 2 or 3 Plug-ins (only for Viz 2.x) Viz Engine 2.8 PL5 HotFix3 or Viz Engine 3.2.8 or later Viz DataPool 2.10 or later Viz World Client 10.0 or later (see <a href="#">Vizrt Maps</a> ) <i>Optional:</i> Viz Content Pilot with Viz Template Wizard, Media Sequencer, Viz Multiplexer and Thumbnail Generator.
Executable(s)	viz.exe VizGui.exe vizSend.exe
<a href="#">Ports and Connections</a>	TCP: 6100 (preview and playout) 14300 (Viz Multiplexer) 50007-50009 (multiplexing).
Local drive access	Read and write access to C:\Program Files\vizrt\viz\
Network access	Mapped drive to VOS still store folder and Viz Engine data root (see <a href="#">Shared Data</a> )
Operating system	Windows XP SP2/SP3 (32-bit) and Windows 7 (64-bit)

The Viz Artist design machine should preferably have the same specifications as the [Viz Engine](#) playout renderers, especially if the designers need to test performance issues on demanding scenes.

If designers are creating templates for [Viz Content Pilot](#) (VCP), it is recommended that VCP is installed on a separate machine for more accurate playout emulation on [Viz Engine](#).

### 2.3.3 Viz Content Pilot

Viz Content Pilot (VCP) is built on a client-server software model where the VCP client connects to the [Viz Content Pilot Database](#) (Oracle database server) for templates and content, and the [Media Sequencer](#) for playout.

- VCP requires an Oracle database as the backend server.
- VCP requires a Media Sequencer for communication with Viz Engine and other systems.
- VCP 5.5 requires Media Sequencer version 1.21 or later.

On the server side, the database serves all clients storing and retrieving content data for the control, delivery and triggering of graphics rendered on the graphics renderer Viz Engine.

This section contains information on the following topics:

- [Viz Content Pilot Client](#)
- [Viz Content Pilot Database](#)
- [Viz Content Pilot Database Administrator](#)
- [Viz Content Pilot Newsroom Component](#)

- [Viz Content Pilot Thumbnail Generator](#)
- [Viz Template Wizard](#)
- [Pilot Data Server](#)

### Viz Content Pilot Client

The VCP specifications shown below are machine specifications for a typical newsroom system setup, where VCP is the control application receiving the playlist.

Software	Oracle 10g Runtime Client 32-bit Viz Content Pilot 5.5 Media Sequencer 1.21 or later <i>Optional:</i> Viz World Client, VCP TimeCode Monitor, Viz PreCut. <i>Optional:</i> If local preview is chosen, Viz Engine (Extra Viz 2.x Plugins and Viz DataPool) must be installed. <i>Optional:</i> Windows Media Player 11 for video clip preview in Viz Object Store.
Executable(s)	VizContentPilot.exe vizPreviewEngine.exe (local preview)
Local drive access	Access to Oracle client files and folders Read and write access to C:\Program Files\vizrt\
Network access	Mapped drive to Viz Object Store still store folder <i>Optional:</i> If local preview using Viz Engine 2 is chosen, a mapped drive to Viz Engine's data root is needed Also see <a href="#">Shared Data</a>
Operating system	Windows 7 Professional 64-bit (recommended) Windows 7 Enterprise 64-bit Windows 7 Ultimate 64-bit Windows XP Professional 32-bit

Vizrt recommends the use of remote preview that has no need for a local Viz Engine or graphics cards on the client machine.

### Viz Content Pilot Database

The VCP database is an Oracle database server. Usually two database servers are installed where one is used for manual failover and to hold the Viz Engine 2.x data root. Viz Engine 3.x graphics data is stored on the [Viz Graphic Hub](#).

Software	Oracle Administrator Client 10g/11g (32-bit standard editions)
Executable(s)	Please refer to official Oracle documentation.

<a href="#">Ports and Connections</a>	1521 (queries)
Local drive access	A shared folder on the second server (failover) has to be accessible for all machines showing the rendered graphics.
Operating system	Please refer to official Oracle documentation
Oracle Documentation	Oracle Database Documentation Library: 11g: <a href="http://www.oracle.com/pls/db112/homepage">http://www.oracle.com/pls/db112/homepage</a> 10g: <a href="http://www.oracle.com/pls/db102/homepage">http://www.oracle.com/pls/db102/homepage</a>

### Viz Content Pilot Database Administrator

The Viz Content Pilot Database Administrator tool (VCP DBA) is a small application used for installing, upgrading, exporting, importing, and setting various parameters for the [Viz Content Pilot Database](#). It is purely a DBA tool, and should therefore only be used by database administrators.

Software	Oracle Administrator Client 10g/11g 32-bit VCP DBA
Executable(s)	VCPDBA.exe
Services	Oracle database service TNS listener service
Operating system	Windows Server 2003 32-bit Windows XP 32-bit Windows 7 32-bit or 64-bit

### Viz Content Pilot Newsroom Component

The newsroom client machine specification describes a basic setup for journalists and editors. For a more detailed view on available software options, see the [Viz Content Pilot](#) and other administrator guides for descriptions on different types of setup.

Software	Newsroom system client Oracle 10g Instant Client 32-bit or later VCP's Newsroom Component 5.5 Viz Object Store 5.5 Viz World Client 10.0 or later (see <a href="#">Vizrt Maps</a> ) <i>Optional:</i> Vizky 1.6 and later (older versions will not work) <i>Optional:</i> Oracle 10g Runtime Client or later. <i>Optional:</i> If local preview is chosen, Viz Engine (with Extra Viz 2.x Plugins and Viz DataPool) must be installed. <i>Optional:</i> Viz EasyCut or Viz PreCut for video clip editing.
----------	--

Executable(s)	VCPAxFiller.ocx VCPAxFiller.exe (NLE) viz.exe VizObjectStore.exe
Local drive access	Read access to Oracle client files and folders Read and write access to C:\Program Files\vizrt\
Network access	Mapped drive to VOS still store folder. <i>Optional:</i> If local preview using Viz Engine 2 is chosen, a mapped drive to Viz Engine's data root is needed. Also see <a href="#">Shared Data</a> .
Other	Registry settings for preview Registry settings for Media Object Server (MOS) ID
Operating system	Windows 7 Professional 64-bit (recommended) Windows 7 Enterprise 64-bit Windows 7 Ultimate 64-bit Windows XP Professional 32-bit

Vizrt recommends the use of remote preview that has no need for a local Viz Engine on the client machine; hence, local preview is not recommended.

All users of machines installed with Viz Engine must have read and write access to the following folder: C:\Program files\vizrt\.

The Newsroom Component derives its Viz Video Hub parameters from the VCP database.

### Viz Content Pilot Thumbnail Generator

VCP's Thumbnail Generator is an optional addition to a VCP setup that generates data element snapshots used as thumbnails in order to visualize graphics and video elements in the VCP client's playlist.

It is recommended to install Thumbnail Generator on the [Viz Graphic Hub](#) or [Viz Content Pilot Database](#) machine.

It is also recommended to configure Viz Thumbnail Generator to fetch scene snapshots from one of the newsroom Viz Engine preview machines. If installed on a local Viz Engine, see also Viz Engine.

-----  
**CAUTION!** Do not use an on-air Viz Engine to generate thumbnails.  
-----

Software	Oracle 10g Instant Client 32-bit Viz Content Pilot's Thumbnail Generator 5.5 <i>Optional:</i> Oracle 10g Runtime Client 32-bit
----------	--

Executable(s)	ThumbnailGenerator.exe
Operating system	Windows 7 Professional 64-bit (recommended) Windows 7 Enterprise 64-bit Windows 7 Ultimate 64-bit Windows XP Professional 32-bit 2003 Windows 32-bit.

### Viz Template Wizard

Viz Template Wizard is a template design and scripting tool used to create templates for graphics and video. It is possible to install Viz Template Wizard on the same machine as Viz Artist; however, it is recommended to install a separate design client for template designers.

Software	Oracle 10g Instant Client 32-bit Media Sequencer 1.20 Viz Template Wizard 5.5 <i>Optional:</i> Oracle 10g Runtime Client 32-bit <i>Optional:</i> Windows Media Player 11 for video clip preview in Viz Object Store.
Executable(s)	scheduler.exe (when running in Console mode) VizTemplateWizard.exe
Operating system	Windows 7 Professional 64-bit (recommended) Windows 7 Enterprise 64-bit Windows 7 Ultimate 64-bit Windows XP Professional 32-bit.

Viz Template Wizard connects to [Media Sequencer](#) for testing and previewing of template graphics. The Media Sequencer connection defaults to localhost. To use a different host set the command line option *-Media Sequencer <host>* in Viz Template Wizard's target path

### Pilot Data Server

The Pilot Data Server is installed as an application layer on top of the Viz Content Pilot database. The Pilot Data Server may be asked to handle requests from scripts to provide information on data elements, or to provide frame servers the information needed in order to resolve which scene and data that is to be rendered by the frame server.

Software	Oracle 10g Instant Client 32-bit Microsoft .NET Framework 4 Pilot Data Server 1.1 or later
Executable(s)	Vizrt Pilot Data Server (service)

<a href="#">Ports and Connections</a>	8177
Operating system	Windows 7 Professional 64-bit (recommended) Windows 7 Enterprise 64-bit Windows 7 Ultimate 64-bit Windows XP Professional 32-bit Windows 2008 server 32-bit

### 2.3.4 Viz Engine

Viz Engine is an extremely powerful rendering engine and at the core of Vizrt's real-time graphic solutions. 2D and 3D animated scenes designed in Viz Artist are rendered in real-time as high-end animations, and the output can be SD or HD video. Viz Engine systems work with all other Vizrt products to provide users with the total solution for producing on-air graphics content.

To run Viz Engine as a program or preview (optional) machine, the following software and configuration is needed:

Software	Extra Viz 2 or 3 Plug-ins (only for Viz 2.x) Viz Engine 2.8 PL5 HotFix3 or Viz Engine 3.2.8 or later Viz DataPool 2.10 or later Viz World Client 10.0 or later (see <a href="#">Vizrt Maps</a> )
Executable(s)	viz.exe
<a href="#">Ports and Connections</a>	6100 (preview and playout), 14300 (Viz Multiplexer), 50007–50010 (multiplexing).
Local drive access	Local preview: Read and write access to folder C:\Program Files\vizrt\
Network access	Mapped drive to VOS still store folder Local preview: Mapped drive to Viz Engine data root Also see, <a href="#">Shared Data</a>
Operating system	Windows XP SP2/SP3 (32-bit) and Windows 7 (64-bit)

Machines setup for local preview need an OpenGL compatible graphics card and at least 512MB of memory (RAM) in addition to a reasonably new processor. Some graphic features on a preview machine will not be shown exactly as on a Viz Engine renderer. This is limitations in the OpenGL features on the graphics cards, and not related to Vizrt's software.

This section also contains information on the following topics:

- [Connection Broker](#)
- [Preview Server](#)



### Connection Broker

The Connection Broker option is used in situations where you want to have access to more than one Viz Engine for providing frames for Non-linear Editing use.

Software	Viz Connection Broker, Microsoft .NET Framework 3.5
Services	Viz Connection Broker
<a href="#">Ports and Connections</a>	21098 is used when connecting over http using the REST interface.
Operating system	Windows 2003 and 2008 server.

### Preview Server

The Preview Server option is used in situations where Viz Engine will be used to provide frames for snapshot/thumbnail generation.

Software	Preview Server 1.0 or later Microsoft .NET Framework 4 Viz Engine 2.8 or Viz 3.2 and later
Executable(s)	PreviewServer.exe
<a href="#">Ports and Connections</a>	54000 is used when connecting over http using the REST interface.
Network access	Uses the Bonjour protocol to announce available services.
Operating system	Windows XP 32-bit Windows 7 32-bit or 64-bit

### 2.3.5 Viz Gateway

Viz Gateway is Vizrt's implementation of the MOS Protocol. It enables users of a Newsroom Computer System (NCS) to perform instant updates on playlists in Vizrt's control applications (Viz Trio and VCP).

The Viz Gateway is a framework built to help in newsroom integration tasks. Currently Viz Gateway support NCSs based on the MOS Protocol that is supported by the leading NCS vendors.

Viz Gateway is in principle an extension to Media Sequencer; hence, any Viz Gateway supported version of the Media Sequencer may be configured to run as a Viz Gateway server using the Viz Gateway configuration tool.

Software	Oracle 10g Runtime Client 32-bit Viz Gateway 1.0.10 or 2.0 (beta)
Executable(s)	scheduler.exe (if running in Console mode)

<b>Ports and Connections</b>	10540 – 10541 (MOS lower and upper port) 10640 (DB event port) 10002 (Viz Gateway Controller Client)
Services	vizgwservice.exe
Local drive access	Access to Oracle client files and folders Read and write access to folder C:\Program Files\vizrt
Operating system	Windows 2003 32-bit (recommended) Windows XP 32-bit

### 2.3.6 Viz Graphic Hub

Viz Graphic Hub is delivered as a pre-installed system with recommended hardware and software. Viz Graphic Hub must be installed as a separate server; hence, it is not recommended to install anything else on the server that will cause the system to lose performance.

.....  
**Note:** The database directory cannot reside on a remote machine.  
 .....

Software	Viz Graphic Hub 2 or later
Executable(s)	VizDbNamingService.exe VizDbTerminal.exe
<b>Ports and Connections</b>	19392–19396 (in most cases the ports are configurable).
Local drive access	Read and write access to database folders (configurable).
Operating system	Windows XP 32-bit

.....  
**IMPORTANT!** Do not run firewall or antivirus scanning software on the server.  
 .....

### 2.3.7 Media Sequencer

The Media Sequencer is middleware software primarily used by control applications to connect to for example render engines, newsroom systems and media asset management systems.

More concrete the Media Sequencer is a framework for defining and executing media elements. The media elements are defined in a tree-based schedule that the sequencer interprets. The schedule is saved as an XML file (named default.xml). The XML file, in short, contains the configuration settings and the playlists saved to it by the control application.

The Media Sequencer's scheduler has a high-resolution timer that manages a Virtual Document Object Model (VDOM) that contains the schedule. The scheduler

also performs the actual execution of the schedule by interpreting elements describing actions from the VDOM. The communication between end user products and the Media Sequencer mostly goes through a protocol named TreeTalk.

Software	Oracle 10g Runtime Client 32-bit Media Sequencer 1.20
Executable(s)	scheduler.exe (if running in Console mode)
<a href="#">Ports and Connections</a>	8580 (REST), 8594 (Media Sequencer TreeTalk)
Services	scheduler.exe
Local drive access	Access to Oracle client files and folders. Read and write access to the following folders: C:\Program Files\vizrt\ C:\Documents and Settings\All Users\Application Data\Vizrt\Media Sequencer
Network access	Uses the Bonjour protocol to announce available services.
Operating system	Windows 2003 32-bit (recommended) Windows XP 32-bit

### 2.3.8 Viz Trio

The Viz Trio client is the CG operator's user interface. It has a TCP connection to a [Media Sequencer](#). The client gives the user access to creation, editing and playout of pages with graphics. A Viz Engine for local preview renders the graphics within the Viz Trio client.

Software	Extra Viz 2 or 3 Plug-ins (only for Viz 2.x) Microsoft .NET Framework 3.5 SP1 (Viz Trio 2.9 and later) Viz Engine 2.8 PL5 HotFix3 or Viz Engine 3.2.8 or later Media Sequencer 1.20 Viz Trio 2.10 client Viz World Client 10.0 or later (see <a href="#">Vizrt Maps</a> ) <i>Optional:</i> Local <a href="#">Media Sequencer</a> and Oracle 10g Runtime Client for connecting to the <a href="#">Viz Content Pilot Database</a> . <i>Optional:</i> Windows Media Player 11 for video clip preview in Viz Object Store.
Executable(s)	trio.exe trionle.exe viz.exe

---

Operating system	Windows XP SP3 32-bit Windows 7 32-bit or 64-bit
------------------	---

---

### 2.3.9 Viz Video Hub

Viz Video Hub is a Media Asset Management (MAM) system that allow users to ingest video clips for use in graphics and as full screen video, supporting both SD and HD output

Video Hub can be used for finding and adding video to graphics using a range of different control applications for both preview and playout on [Viz Engine](#).

.....

**IMPORTANT!** Before Viz Video Hub is used the first time, it is important to decide upon the playout format. Ingesting and storing other formats on Viz Video Hub may lead to an undefined behavior if they are different from what is configured on [Viz Engine](#) .

.....

---

Hardware	Viz Video Hub 2 or later
<a href="#">Ports and Connections</a>	22, 80, 445, 6555

---

### 2.3.10 Vizrt Maps

Vizrt provides a map solution that offers branded maps and geographic animations using [Viz Curious Maps](#) and [Viz World Client and Server](#).

#### Viz Curious Maps

Viz Curious Maps is ideal for designers, program researchers, and producers who need to create high-quality map animations for news, documentary, promotional videos, and online. It is designed to be simple and intuitive to use, so that users with no specific training in computer graphics, or video editing, can create professional maps on demand and at short notice.

---

Software	Viz Curious Maps 7.2 or later
Executable(s)	WorldMaps.exe
<a href="#">Ports and Connections</a>	80, 8080 (Microsoft Bing and Imagery on Demand) 1947 Sentinel HASP Run-time Environment
Operating system	Windows XP 32-bit

---

It is possible to run the server and design machine at the same time on the same machine, but it is likely that this will impact the server performance.

.....

**Note:** Minimum screen resolution is 1280x1024, and it has to be a display size of 96 DPI.

.....

## Viz World Client and Server

Viz World Client and Server integrates [Viz Curious Maps](#) mapping ability and database into Viz Artist and Viz Engine graphics. By utilizing a set of geographic referencing plug-ins and the maps produced by WoC, the creation of location based graphics using maps, 3D objects, texts, and so on, is seamless.

---

Software	Viz World Client 10.0 or later Viz World Server 10.0 or later
Executable(s)	AxMapsClient.ocx (embedded editor) MapBuilder.exe MapConfigClient.exe ServerAllocator.exe ServerLauncher.exe
<a href="#">Ports and Connections</a>	101, 102, 103 80, 8080 (Microsoft Bing and Imagery on Demand).
Operating system	Windows XP 32-bit (client and server) Windows Server 2003 32-bit (server)

---

### See Also

- [Viz World Client and Server documentation](#)

---

## 2.4 Shared Data

Vizrt recommends having mapped drive letters for all your shared data. Mapped drives are commonly used for your Viz Engine 2.x data root, Viz Object Store images, Viz Curious Maps cache.

Note that it is possible to configure most systems to use Universal Naming Convention (UNC) as an alternative to mapped drives.

-----  
**Example:** \\hostname\shared folder\resource  
-----

---

## 2.5 Ports and Connections

This section contains information on the following topics:

- [Port Numbers](#)
- [Multiplexing Ports](#)

## 2.5.1 Port Numbers

The table below lists all default server and listening port numbers that are used. It is, if possible, recommended to run the system on a network without a firewall.


Listener	Port(s)	Descriptions and Comments
ArdFTP Viz MPS	21	Used for video transfers from <a href="#">Viz Video Hub</a> to <a href="#">Viz Engine</a> . Also used by Viz MPS (service: FTP).
Viz Video Hub	22	TCP and UDP for logging in to the <a href="#">Viz Video Hub</a> operating system (service: SSH).
Viz World Server	101–103	<a href="#">Vizrt Maps</a> Client connections to the Vizrt Maps Server.
Viz Video Hub	137–139	Used for SMB file sharing (service: Netbios)
Viz Video Hub, Microsoft Bing and Imagery on Demand	80, 8080	Web interface and client software. SOAP port for communication with <a href="#">Viz Video Hub</a> . For download of Microsoft Bing and Imagery on Demand images. (service: HTTP)
Viz Video Hub	443 445	(service: HTTPS) TCP & UDP used for SMB file sharing (service: Microsoft-DS).
Viz Mobilize	554	Real Time Streaming Protocol (service: TCP).
Oracle 10g database	1521	For clients that connect to the <a href="#">Viz Content Pilot Database</a> .
Sentinel HASP Run-time Environment	1947	The Sentinel HASP Run-time Environment uses port 1947 to communicate with local and remote components. This relates to hardlock dongles used with Viz Curious Maps.
Viz Video Hub	3080	Low resolution video and index files (service: lighttpd).
Video servers	5250	MVCP and Xlator control port for video servers.  Note: this port is only necessary in combination with the video server extension (service: AVCP).

Listener	Port(s)	Descriptions and Comments
Viz Engine	6100 6700 6800	<p>Ports are used by the Media Sequencers that connect to a <a href="#">Viz Engine</a> program and/or preview channel.</p> <p>Viz Engine's default program and preview port is 6100.</p> <p>In a Viz Trio OneBox setup, the default preview port is set to 6800 in order to separate the program and preview channels.</p> <p>In a dual channel setup, the default program ports are 6100 and 6800 for channel 1 and channel 2, respectively.</p> <p>In a dual channel setup, when used for stereo production, the default program ports are 6700 and 6800 for channel 1 (left eye) and channel 2 (right eye), respectively</p>
Viz Trio	6200 6210	<p>6200 is used for controlling the <a href="#">Viz Trio</a> client over a socket connection.</p> <p>6210 is used by the Viz NLE plugin to establish a connection to Viz Trio.</p>
Newsroom Component	6220	Used by the Viz NLE Plugin to establish a connection to Viz Content Pilot's Newsroom Component.
Viz NLE Editor	6230	Used by the Viz NLE Plugin to establish a connection to the Viz NLE Editor (on Mac).
Viz NLE Config	6240	Used by the Viz NLE plugin to establish a connection to the Viz NLE Configuration tool (on Mac).
Ticker Service	6300 6301	<p>Ticker handler in the Media Sequencer connects to port 6300 for feedback from Ticker Service.</p> <p>Ticker handler in the Media Sequencer connector to port 6301 when controlling the ticker via a socket connection.</p>
Viz Content Pilot	6484	Socket connection used for controlling Viz Content Pilot using macro commands.
Viz Video Hub	6555	Message bus port for communication with <a href="#">Viz Video Hub</a> (service: Messagebus).
Viz Preview Licence Server	7452	For <a href="#">Viz Engine</a> clients (unlicensed/no dongle) connecting to the Viz Preview License server.
Pilot Data Server	8177	Used when connecting over http using the REST interface.

Listener	Port(s)	Descriptions and Comments
Media Sequencer	8580 8594	For clients connecting to the <a href="#">Media Sequencer</a> . 8580 is specifically used when connecting over http using the REST interface.
Viz Video Hub	8080	Used for sending keyframes (service: ardok).
Viz Gateway	10001 10002 10540 10541	For DB notification events. For <a href="#">Viz Gateway</a> controller clients. For MOS object updates. For MOS playlist updates.
Viz Content pilot	10640	Used by Viz Gateway to establish a connection to Viz Content Pilot in order to send and receive updates on MOS messages (e.g. elements and playlists).
Viz Engine	14300	Alternative port used to avoid conflicts with port 6100 (e.g. when using Viz Multiplexer). Port 6100 is normally used by renderers that are on air, hence, it is (e.g. when running Viz Content Pilot version 4 or Viz NLE Plugin towards Viz 2.x) recommended to use another port. Port 14300 is an optional port. The default 6100 may also be used if the renderer is not used on air.
Viz Graphic Hub	19392 – 19396	Ports in use when connecting to different Viz Graphic Hub components.
Viz Engine	50007 50008 50009	Ports 50007 – 50009 are all <a href="#">Multiplexing Ports</a> that enables Viz Engine to work on other scenes in sessions that are used for preview purposes. <b>Isolated port (50007)</b> – All connections to this port get its own session. <b>Shared port (50008)</b> – All connections from one single host shares one session. <b>Fixed port (50009)</b> – Same as shared port except that allocated resources are never cleared from memory.
Preview Server	54000	Used when connecting over http using the REST interface.



## 2.5.2 Multiplexing Ports

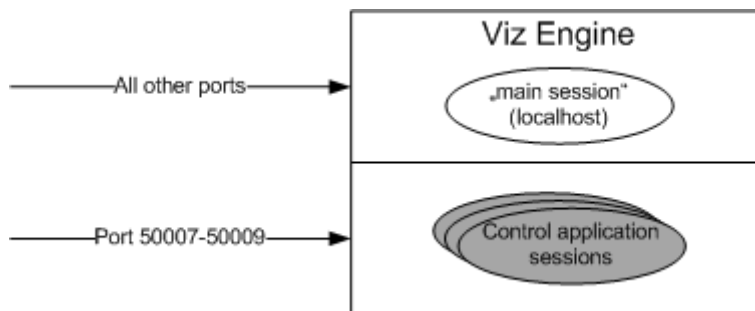

For Viz Engine 2 users an external application named Viz Multiplexer is used to allow multiple users connect to Viz for graphics preview. Viz Multiplexer acts as a special proxy between the client software and Viz, and stores the engine's state for each connected client and restores/updates that state each time a client sends a command to Viz.

For Viz Engine 3 users the multiplexer functionality is an integral part of Viz Engine; hence, there is no need for additional installation and configuration. When using Viz Engine a session management takes place internally, with one default session for the GUI and internal/external commands, and additional sessions created on-demand for the multiplexing ports or the preview port

The 50009 port is traditionally used by Viz Content Pilot 4's Newsroom Component, and is the same as the shared port (50008) except that allocated resources are never cleared from memory. To avoid memory overload, it is recommended to clean up the Viz Engine regularly when using this port.

The 50008 port is a shared port where all connections from one single host shares one session. It is most often used by Viz Trio and the Newsroom Component to display preview frames.

The 50007 port is an isolated port where all connections get their own session. It is used, for example in an NLE setup, to deliver frames to the host NLE-system when rendering or scrubbing video clips with graphics. Using this port will also suppress bounding box commands. Note that 50007 cannot be used by the Newsroom Component.

-----  
**Note:** All multiplexing ports are supported by all Viz Engine versions  
-----

---

## 3 Software Setup

This chapter covers the [Prerequisites](#) and supported hardware options for Vizbefore installing Viz, the procedures on how and.

This section contains information on the following topics:

- [Prerequisites](#)
- [Supported Hardware Options](#)
- [Installing Viz](#)
- [Adding a License](#)

---

### 3.1 Prerequisites

All [Viz Engine](#) or [Viz Artist](#) installations run on a Windows XP SP2 and SP3 (32-bit), and Windows 7 (64-bit) platform.

For **Windows 7** the following applies:

- The user must have administrator rights
- User Account Control must be set to Lowest
- Windows 7 theme Aero must be disabled
- There must only be one active network card
- Depending on the User Account Control settings, the configuration and log files may be created under `C:\Users\<user name>\AppData\Local\VirtualStore\Program Files (x86)\vizrt\Viz3` instead of the Viz Engine installation folder.
- Power management and hibernation mode must be turned off. Execute `"powercfg -h off"` to remove hiberfil.sys from the hard disk.

For each machine a default user is defined that has administrator rights on the machine. The Admin account is as follows:

**Table 1:** Computer Users

Username	Password	Account Type
Admin	vizrt	Computer Administrator

-----  
**IMPORTANT!** It is highly recommended that these passwords are changed!  
-----

To learn more about the different account types, please refer to the Windows operating system manual, or visit [www.microsoft.com](http://www.microsoft.com).

#### See Also

- [Requirements](#)

---

## 3.2 Supported Hardware Options

Viz can be installed and configured to use different video and graphic cards. During the installation three hardware options can be selected.

The supported platform options are:

- **VGA** – Installs the Viz Engine VGA version (standard-PC). This option does not support video output, and is therefore normally used for Viz Artist design machines.
- **Video** – Installs the Viz Engine video version. This version supports the Targa, Matrox X.mio, NVIDIA SDI, DVS and Voodoo cards.
- **Panasonic** – Installs the Viz Engine Panasonic CGP 500 version.
- **Trio Box CG** – Installs the Viz Engine version that enables the machine to run the Viz Trio One Box setup using two graphic cards.
- **Dual channel** – Installs the Viz Engine version that enables the machine to run dual channel (e.g. two program channels) using two graphic cards.

### See Also

- [Installing Viz](#)
- [Video Cards](#)
- [Graphic Cards](#)
- [Audio in Viz](#)
- [Ports and Connections](#)

---

## 3.3 Installing Viz

The Viz software can be installed to run with more than one hardware configuration. Depending on the hardware installed, for example video or audio hardware, Viz will make related features available to the user.

Viz Engine (not the Viz Artist design interface) is basically designed to operate in two modes; with or without video handling. To enable handling of video a video card is needed. The Viz installer auto-detects whether a supported video card is installed or not, and if it is supported by Viz.

Used without a video card Viz is often referred to as a VGA or standard-PC installation, which is commonly used by designers using the Viz Artist interface.

-----  
**Note:** There is only one version of the Viz software in use at any given time.  
-----

This section contains the following procedures:

- [To install Viz](#)
- [To silent install Viz](#)

### To install Viz

1. Login to the computer as an [Computer Administrator](#).
2. Double-click and run the installer.
3. Click Next.

4. Check the “I accept the terms in the License Agreement” option, and click Next.
5. Choose platform type (see [Supported Hardware Options](#)).
6. Optional: Select a different installation directory and/or select the components to install.
7. Click Next.
8. Click Install.
9. When the installation is done, click Finish.

-----  
**IMPORTANT!** Firewall ports configurations must be manually specified to allow Viz communicate over a network.  
-----

### To silent install Viz

Run the following from a command line prompt, or save it to a batch file for execution:

1. On Windows XP:
  - a.@rem silent installation
  - b.@rem platformtype: standardpc, video, panasonic, trioboxcg, dualchannel
  - c.msiexec.exe /i <msi\_package> /quiet  
PLATFORMTYPE=<platformtype> REINSTALL=ALL REINSTALLMODE=vomus
2. On Windows 7:
  - a.@rem silent installation
  - b.@rem platformtype: standardpc, video, panasonic, trioboxcg, dualchannel
  - c.msiexec.exe /i <msi\_package> /quiet  
PLATFORMTYPE=<platformtype>
3. To prevent hardlock driver installation you can add the following parameter:  
HARDLOCK=no.
4. To see other options enter `msiexec` on the command line and press enter.  
Common options are:
  - `/i` : Installs or configures a product. Package: Specifies the name of the Windows Installer package file. ProductCode: Specifies the globally unique identifier (GUID) of the Windows Installer package.
  - `/x` : uninstalls a product. Package: Name of the Windows Installer package file. ProductCode: Globally unique identifier (GUID) of the Windows Installer package.

### See Also

- [Msiexec on Microsoft.com](#)

---

## 3.4 Adding a License

All Viz machines must have a license in order to run. A license is normally acquired when purchasing the product. For acquiring additional or updated licenses contact your local Vizrt representative ([support@vizrt.com](mailto:support@vizrt.com)).

It is also important to note that some of the plug-ins used with Viz is also licensed in addition to Viz itself.

The following procedures can be used on how [To license a new Vizrt dongle](#) and how [To re-license a Vizrt dongle](#).

#### **To license a new Vizrt dongle**

1. Start Viz
2. Once Viz has started a license window will pop up
3. Before pasting in the license string, do the following:
  - Check that the dongle ID from the text file is identical to both what is written on the dongle and in the window that opens in Viz.
  - Check that the date and time on the computer the dongle is attached to is set correct as the license is only valid for a certain time frame.
  - Check that there are 32 pairs of characters and that they are divided by a single space. Also check the characters and any spaces at the end.
4. Paste in the license string, and do the following:
  - Check that the license key has not been entered twice.
  - Check that the whole string is pasted. It should be 32 pairs of characters.
5. Restart Viz for the changes to take effect.

#### **To re-license a Vizrt dongle**

1. Start Viz and click on the 'i' button in the top right corner of the program
2. Paste in the license string
3. Click OK
4. Restart Viz for the changes to take effect

---

## 4 Getting Started

This chapter describes how [To start Viz Engine](#), the [Viz Command Line Options](#) that are available and how [To start Viz with command line option\(s\)](#).

Viz is mainly configured using Viz Config; however, all configuration settings are stored in a file found in the program folder. The configuration file uniquely identifies the machine Viz is installed on by using its hostname (e.g. *Viz-<hostname>-0-0.cfg*).

Any changes to the hostname will affect the configuration of Viz. If a hostname is changed, a new configuration file is created with a default setup. The old configuration file is not deleted, but left unused. It is possible to reassign the old configuration file using the Viz command `-g <config file>`.

This section contains information on the following topics:

- [To start Viz Engine](#)
- [To start Viz with command line option\(s\)](#)
- [Viz Command Line Options](#)

### To start Viz Engine




1. Double-click the icon on the desktop, or
2. Select the program from the Start menu (All Programs > Vizrt > Viz3 > Viz Engine 3.x)

-----  
**Note:** The software is by default installed at C:\Program Files\vizrt\viz3  
-----

## To start Viz with command line option(s)

**Figure 1:** Command line options, Viz Engine

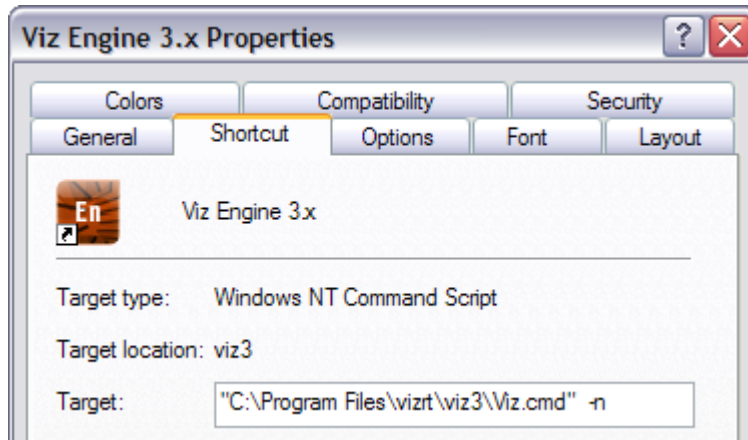

1. Navigate to the Viz 3.x program icon.
2. Right-click the icon and select Properties on the appearing context menu.
3. In the Properties window, and set the [Viz Command Line Options](#) (and parameters) in the *Target* field.
4. Click OK to close the Properties window.

### See Also

- [Installing Viz](#)
- [Configuring Viz](#)

---

## 4.1 Viz Command Line Options

The table below describes all the available Viz command line options

**Table 2:** Viz command line options

Command	Description
-3D	If you want to playout 3D Stereo Clips, you need to start the engine with the -3D parameter. This is for clips only!
-c	Starts Viz in Viz Config mode.
-C	Starts Viz without a console.
-dl	CGP only: Enables direct rendering (disables display lists) for local graphics (i.e. VGA device).
-dr	CGP only: Enables direct rendering (disables display lists) for an external device.
-g <config file>	Starts Viz with a predefined configuration file. This allows the user to have more than one startup option.
-i	Enables pre-initialization of textures.
-n	Starts Viz in Viz Engine mode.

**Table 2:** Viz command line options


<b>Command</b>	<b>Description</b>
-o <scene>	Starts Viz in Viz Engine mode with an optional auto load scene (example: -o SCENE*<path>).
-T	Keeps console always on top.
-v	Enables verbose mode.
-V	Shows the last rendered frame on video output (only Digital Voodoo cards).



## 5 On Air Mode

The On Air interface may vary, depending on the software and hardware configuration used. In Viz Artist, designers can click the On Air button on the main menu to switch Viz Artist from a modeling tool to a render engine. The application will then wait for control commands; however, scene animations can also be rendered by the use of the [Control Buttons](#) (top-left corner).

**Figure 2:** On Air, Viz Engine VGA

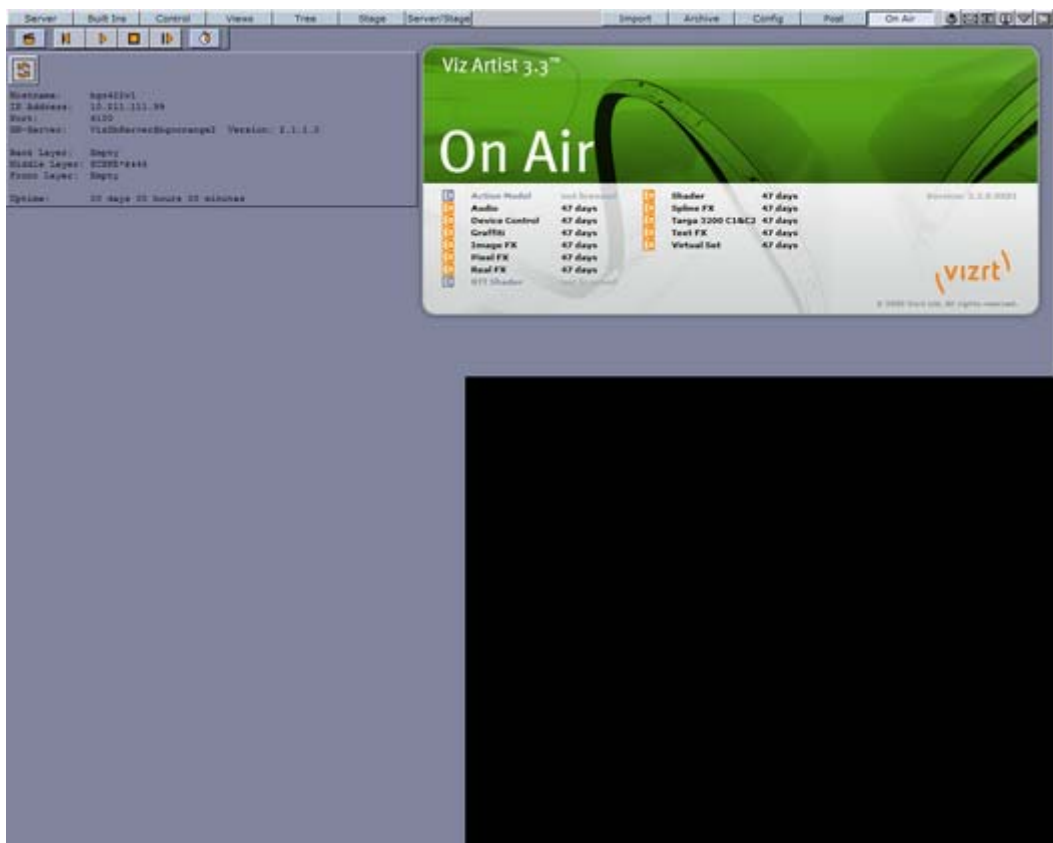

The top left of the On Air screen shows a set of [Control Buttons](#) as well as a [Performance Bar](#) button. All [License Information](#) is displayed at the top right of the screen.

Depending on the software and hardware settings, additional buttons and information is available. For example in design mode, the scene will be shown in an output window (lower right).

**Note:** Be sure to keep Viz Artist running in the foreground as not to disturb the broadcast. Furthermore make sure no window is displayed to overlap the render output as this would interfere with the broadcast.

All script events that are added to a scene or to single containers will be executed in On Air mode. To learn more about scripting see the script documentation.


This section contains information on the following topics:

- [Director Control Panel](#)
- [Control Buttons](#)
- [Performance Bar](#)
- [System Information](#)
- [License Information](#)

---

## 5.1 Director Control Panel

**Figure 3:** Director Control Panel

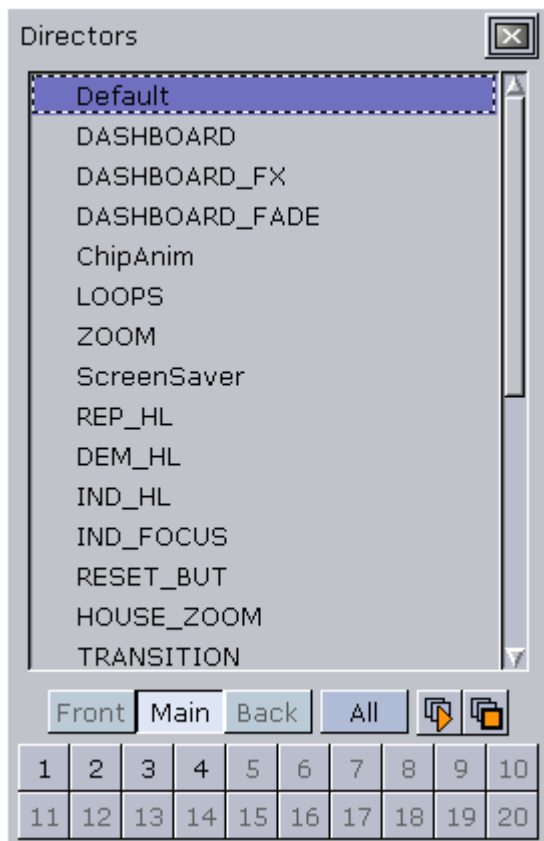

The Standard-PC version of Viz displays a clapper board button when in On Air mode. This button opens the Director Control Panel window.

The Director Control Panel window can be used to select and animate one, multiple or all directors. In addition it can be used [To set slots and to animate a combination of director\(s\)](#).

This section contains information on the following topic and procedure:

- [Properties and Parameters](#)
- [To set slots and to animate a combination of director\(s\)](#)

### Properties and Parameters

- **Front** – Shows all directors in the Front layer.
- **Main** – Shows all directors in the Main layer.
- **Back** – Shows all directors in the Back layer.
- **All** – Shows and selects all directors.
- **Play** – Plays the animation for the selected director(s).
- **Stop** – Stops the animation for all layers. Right-clicking stops only the selected director.
- **1–20** – Selects the selected director(s) configured for the slot. See also To set slots and to animate a combination of director(s).

### To set slots and to animate a combination of director(s)

1. Select one, multiple or all directors
2. Drag and drop the director(s) onto a slot (1–20)
3. Click to select the newly configured slot
4. Click the Play button to animate the selected director(s)

---

## 5.2 Control Buttons



- **Clapper Board:** Opens the [Director Control Panel](#) window.
- **Back:** Jumps to beginning of your scene.
- **Play:** Will start to play your scene.
- **Stop:** Stops the scene.
- **Forward:** Continues to play after stopping.
- **Screen:** Displays the VGA Preview window. VGA Preview must be activated in the [Video Output](#) section, and is only available on machines with video cards.

-----  
**Note:** VGA Preview is always enabled for the Standard-PC version of Viz Artist.  
-----

- **Clock:** Opens the [Performance Bar](#).

---


## 5.3 Performance

Analyzing the performance of Viz can be done using two tools; one is the [Performance Bar](#) that allows you to closely monitor a range of parameters for analyzing real-time performance of Viz, the other is the [Performance Analyzer](#) tool that allows you to monitor key performance and camera parameters as a head-up display in the renderer window and initiate logging of statistic, command and event information to the log file(s).

This section contains information on the following topics:

- [Performance Analyzer](#)
- [Performance Bar](#)

### 5.3.1 Performance Analyzer

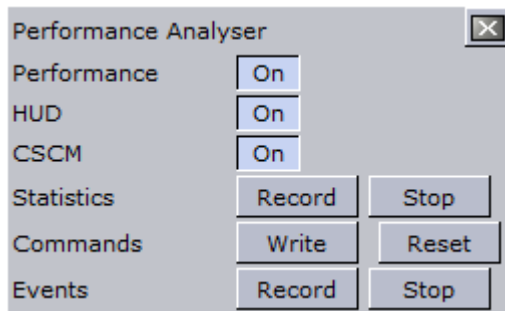

The performance analyzer enables key performance and camera information to be displayed in the renderer view as a head-up display. Additionally the performance analyzer can be used to initiate writing of statistic, command and event information to the log files.

- **Performance:** Displays the current (CUR) and (MAX) parameters (see Performance Bar).
- **HUD:** Enables the head-up display (HUD) showing the following parameters in the renderer view:
  - **Camera 1–n:** Displays the currently selected camera.
  - **Position:** Displays the camera's X, Y and Z position.
  - **Pan/Tilt/Twist:** Displays the camera's pan, tilt and twist parameters.
  - **FovX/FovY:** Displays the camera's field of view (fov) for the horizontal (X) and vertical (Y) plane.
  - **Center Shift:** Displays the X and Y position of the camera's center shift.
- **CSCM:** Displays the center shift as a cross hair in the renderer.

Log files reside under the Viz program folder: C:\Program Files\Vizrt\Viz3\.

#### To open the performance analyzer

- Hold CTRL while clicking the right mouse button on the X (close) button in Viz.

### 5.3.2 Performance Bar

<b>Current (CUR)</b>	:	<b>60.41</b>	fps (Frame Rate: 50.0)
<b>Maximum (MAX)</b>	:	<b>1200.86</b>	fps
<b>Vertices (VER)</b>	:	<b>0</b>	k
<b>AllocTexSize (TET)</b>	:	<b>0.03</b>	MB
<b>TexSize (TEC)</b>	:	<b>0.00</b>	MB
<b>Animation (ANT)</b>	:	<b>3.07</b>	us
<b>Matrix (MAT)</b>	:	<b>1.87</b>	us
<b>Z-Sort (Z&amp;C)</b>	:	<b>16.27</b>	us
<b>Video (VID)</b>	:	<b>19.39</b>	us
<b>Rendering (REN)</b>	:	<b>791.77</b>	us
<b>Script (SCR)</b>	:	<b>0.00</b>	us
<b>Plugin (PLU)</b>	:	<b>0.36</b>	us
<b>Idle</b>	:	<b>19167.30</b>	us

The performance bar gives an idea of the current scene rendering performance (frames per second).

- **Current (CUR):** Shows how many frames per second the scene will render at in On Air mode. The number should be above 50 (PAL) or 60 (NTSC), according to the rate that has been specified in the [Output Format](#) section.
- **Maximum (MAX):** Shows how many frames per second the scene can render at without waiting for vertical retrace. The higher the maximum value, the more performance is left. If the maximum value is reduced to below 50 or 60, the scene is not rendering in real-time.
- **Vertices (VER):** Shows the number of vectors in the scene.
- **AllocTexSize (TET):** Shows the total allocated size of texture memory.
- **TexSize (TEC):** Shows the size of the currently used texture memory.
- **Animation (ANI):** Shows how many microseconds all active directors and animation channels take. This indicator is linked to the yellow bar.
- **Matrix (MAT):** Transforms each container in the scene into world coordinate space. This indicator is linked to the cyan bar.
- **Z-Sort (Z&C):** Refers to Z-sort and Culling, and sorts all containers for correct transparency drawing and determines if containers are visible in the current camera view. This indicator is linked to the pink bar.
- **Video (VID):** Shows how many microseconds video input (live video texture) and video output take. De-interlaced video inputs take longer time than progressive and interlaced. The only way to improve this value is to use a faster system. This indicator is linked to the red bar.
- **Rendering (REN):** Shows how many microseconds it takes to render all objects on the screen. A faster graphics card will improve this value. This indicator is linked to the blue bar.
- **Script (SCR):** Shows the consumed time in microseconds from all active scripts. This indicator is linked to the dark green bar.
- **Plugin (PLU):** Indicates how much time in microseconds all active plug-ins spend in each render cycle. This indicator is linked to the orange bar.
- **Idle:** Shows available resources in microseconds the renderer has available. This indicator is linked to the light green bar.

## To open the performance bar




1. Click the performance bar button (timer icon).
2. To see all parameters, extend the view by clicking the Eject button.

---

## 5.4 System Information

Figure 4: System information

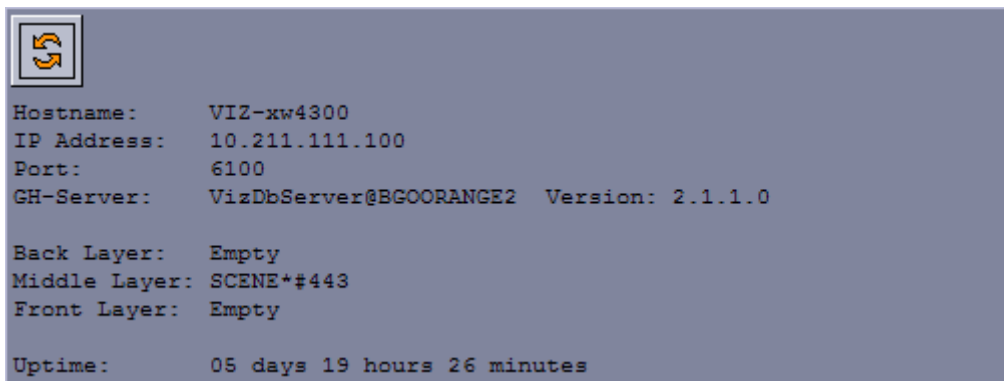

```
Hostname:      VIZ-xw4300
IP Address:    10.211.111.100
Port:         6100
GH-Server:    VizDbServer@BGOORANGE2  Version: 2.1.1.0

Back Layer:   Empty
Middle Layer: SCENE*#443
Front Layer:  Empty

Uptime:       05 days 19 hours 26 minutes
```














In the status information the parameters you need to know for sending external control commands are displayed.

- **Refresh button:** Refreshes the status information.
- **Hostname:** Shows the name external control programs can use to communicate with Viz Artist.
- **IP Address:** Shows the IP address external control commands can communicate with Viz Artist.
- **Port:** Shows the port Viz Artist is using. Default port is 6100, but may be changed in Viz Config's [CGP Panasonic](#) section.
- **GH-Server:** Shows the Viz Graphic Hub server Viz Artist is connected to.
- **Back Layer:** Shows the name of the scene that is defined to run in the background of the middle and front layer scene(s).
- **Middle Layer:** Shows the name of the scene that is defined to run in the middle between the back and front layer scene(s).
- **Front Layer:** Shows the name of the scene that is defined to run in the foreground of the back and middle layer scene(s).
- **Uptime:** Shows the time elapsed since Viz was started.

---

## 5.5 License Information


Figure 5: Licensed features

	<b>Action Model</b>	<b>116 days</b>		<b>Spline FX</b>	<b>116 days</b>
	<b>Audio</b>	<b>116 days</b>		<b>Targa 3200 FX</b>	<b>not licensed</b>
	<b>Device Control</b>	<b>116 days</b>		<b>Text FX</b>	<b>116 days</b>
	<b>Graffiti</b>	<b>116 days</b>		<b>Virtual Set</b>	<b>116 days</b>
	<b>Image FX</b>	<b>116 days</b>		<b>Vizual Data Tools</b>	<b>116 days</b>
	<b>Real FX</b>	<b>116 days</b>			
	<b>RTT Shader</b>	<b>116 days</b>			
	<b>Shader</b>	<b>116 days</b>			

The license information listing displays the licensing information such as licensed features and how many days the license has left before it must be renewed.

## 6 Configuring Viz

Figure 6: Viz Configuration interface, Video

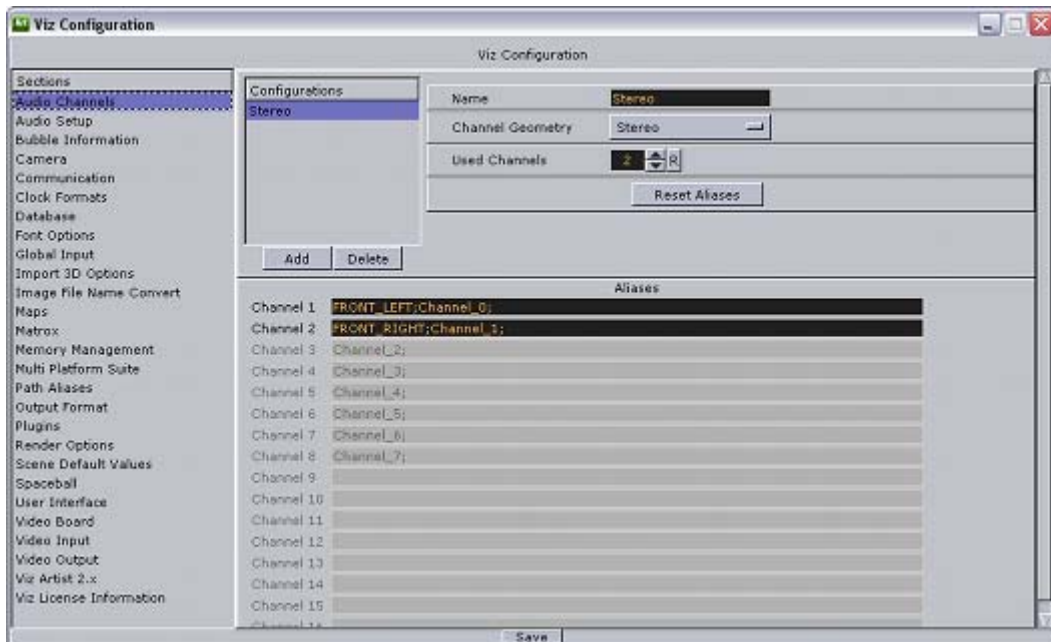

Viz Config is the configuration interface for Viz Engine and other applications that integrate with Viz Engine.

Basically the user interface is divided in two; sections on the left and settings on the right. Various parameters regarding the program functionality can be set in the configuration; however, additional and more advanced settings can be set using the configuration file (not recommended).

Viz is mainly configured using Viz Config; however, all configuration settings are stored in a file found under the install directory. The configuration file uniquely identifies the machine Viz is installed on by using its hostname (e.g. *Viz-<hostname>-0-0.cfg*).

Any changes to the hostname will affect the configuration of Viz. If a hostname is changed, a new configuration file is created with a default setup. The old configuration file is not deleted, but left unused. It is possible to reassign the old configuration file using the Viz command `-g <config file>`.

-----  
**CAUTION!** Make sure to save any changes before closing Viz Config or else they might be discarded. Hence, it is recommended to restart the software to make sure that the changes take effect.  
-----

This section contains information on the following topics:

- [To start Viz Config](#)
- [Audio Channels](#)
- [Audio Setup](#)



- [Bubble Information](#)
- [Camera](#)
- [CGP Panasonic](#)
- [Communication](#)
- [Clock Formats](#)
- [Database](#)
- [Font Options](#)
- [Global Input](#)
- [Import 3D Options](#)
- [Image File Name Convert](#)
- [Maps](#)
- [Matrox](#)
- [Memory Management](#)
- [Multi Platform Suite](#)
- [Path Aliases](#)
- [Output Format](#)
- [Plugins](#)
- [Render Options](#)
- [Scene Default Values](#)
- [Spaceball](#)
- [User Interface](#)
- [Video Board](#)
- [Video Clip](#)
- [Video Input](#)
- [Video Output](#)
- [Video Preview](#)
- [Viz Artist 2.x](#)
- [Viz License Information](#)

#### To start Viz Config



1. Start Viz Config from *Start > All Programs > Vizrt > Viz 3 > Viz Config 3*, or
2. if Viz Artist 3 is running, click *Config* on the main menu.

---


## 6.1 Audio Channels

This section contains information on the following topics:

- [Properties and Parameters](#)
- [To add new audio channels](#)
- [To add multi-language audio channels](#)
- [To add multiple audio channel configurations](#)
- [To delete audio channels](#)

## Properties and Parameters

Figure 7: Audio Channels

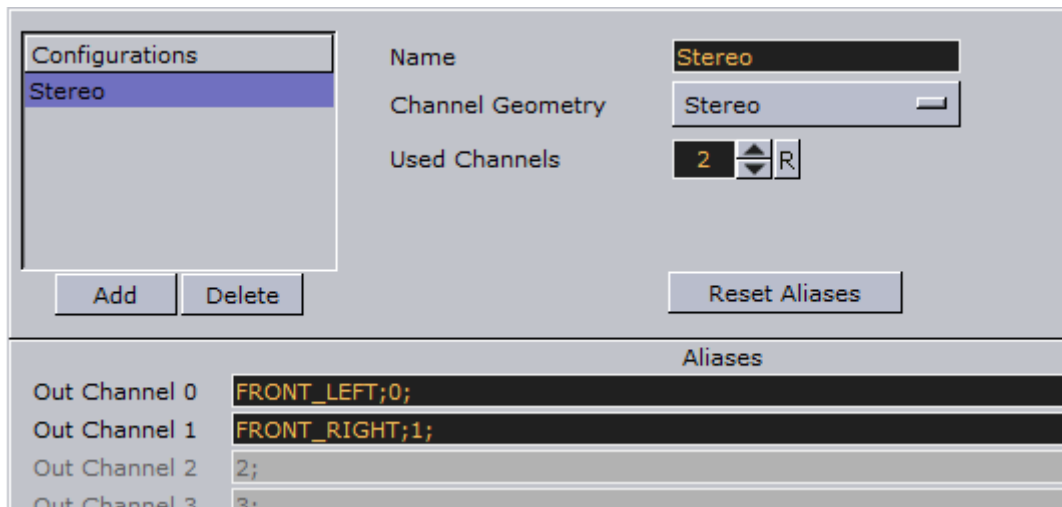

- **Configurations:** Displays a list of channel configuration(s).
- **Add:** Adds a new channel configuration to the Configurations list.
- **Delete:** Deletes the selected channel configuration from the Configurations list.
- **Name:** Sets the name of the selected channel configuration.
- **Channel geometry:** Sets the channel geometry. Available options are: [Mono](#), [Stereo](#), [5.1](#), [7.1](#) and [Quad](#).
- **Used Channels:** Sets the number of configurable channel alias fields that can be mixed by the internal channels in Viz Engine (software). On a Matrox system this number must be equal to the number of configured input channels (hardware). This setting is independent of the Channel Geometry setting.
- **Reset Aliases:** Sets the channel aliases to the default option; however, the custom entry is not removed.
- **Channel 1–8:** Sets the channel alias for multichannel clips that are used by Viz Engine to mix the clip channels to Viz Engine’s internal audio channels. Aliases are separated by semicolon.

### To add new audio channels

1. Click the **Add** button.
2. Select the new entry from the **Configurations** list, and enter the new name in the **Name** field.
3. Set the **Channel Geometry**, and the number of **Used Channels**.
4. Click **Save**.

## To add multi-language audio channels

**Figure 8:** Multi-language audio setup

Configurations	Name	Multi-language
Stereo	Channel Geometry	Stereo
Multi-language	Used Channels	4
		Reset Aliases

Add Delete

Aliases	
Channel 1	FRONT_LEFT; Channel_0;
Channel 2	FRONT_RIGHT; Channel_1;
Channel 3	Channel_2; FrenchLeft;
Channel 4	Channel_3; FrenchRight;

1. Click the **Add** button.
2. Select the new entry from the **Configurations** list, and enter the new name in the **Name** field.
3. Set the Channel Geometry to **Stereo**, and then click **Reset Aliases**.
4. Increase the number of **Used Channels** to 4
  - This will improve the performance.
5. In the **Channel 3** field add the alias **FrenchLeft**.
6. In the **Channel 4** field add the alias **FrenchRight**.
  - Add the same configuration for English (EnglishLeft, EnglishRight) and German (GermanLeft, GermanRight) on the other machines.
7. Click **Save**.

## To add multiple audio channel configurations

**Figure 9:** Multi-languageAll setup

Configurations	Name	Multi-languageAll
Stereo	Channel Geometry	Stereo
Multi-languageF	Used Channels	2 R
Multi-languageE		Reset Aliases
Multi-languageG		
Multi-languageAll		

Add Delete

Aliases

Channel 1	FRONT_LEFT; Channel_0; FrenchLeft; EnglishLeft; GermanLeft;
Channel 2	FRONT_RIGHT; Channel_1; FrenchRight; EnglishRight; GermanRight;

1. See how [To add multi-language audio channels](#), and repeat the process such that the **Audio Channels** configuration has 3 setups for the three languages.
2. Name the configurations the following way;
  - Multi-languageF
  - Multi-languageE
  - Multi-languageG
3. Add a Multi-languageAll configuration (see [Figure 9: Multi-languageAll setup](#)).
4. In the **Channel 1** field add the alias **FrenchLeft, EnglishLeft** and **GermanLeft.** , and do the same for **Channel 2.**  
`FRONT_LEFT; Channel_0; FrenchLeft; EnglishLeft; GermanLeft;`  
`FRONT_RIGHT; Channel_0; FrenchRight; EnglishRight; GermanRight;`
5. Click **Save**.

## To delete audio channels

1. Select a configuration entry from the **Configurations** list, and click the **Delete** button.
2. Click **Save**.

## See Also

- [Audio Setup](#)

---

## 6.2 Audio Setup

Figure 10: Audio Setup

Sample Rate	48000		
Device0	Realtek HD Audio output	Bits per Sample	16
Device1	none	Bits per Sample	16
Matrox Audio Configuration			
Mode	Default		

In this section all installed DirectSound audio cards are listed displaying the available audio inputs that can be mixed to one audio output by Viz Engine. It is currently only possible [To manually activate an audio device](#) by editing the configuration file.

---

**Note:** The Matrox audio-extension board is not configurable through this user interface.

---

This section contains information on the following topics:

- [Properties and Parameters](#)
- [To manually activate an audio device](#)

### Properties and Parameters

- **Sample Rate:** *Reserved for later use.* Displays the sample rate. Default sample rate is 48kHz (48000) which is the maximum allowed.
- **Device *n*:** Displays the name of the audio card.
- **Bits per Sample:** *Reserved for later use.* Displays the number of bits used per sample. Default value is 16 Bit per sample rate.
- **Mode:** Refers to the audio mode of the Matrox card. Available modes are Embedded, AES, Embedded AES, Loop and Default.
  - **Embedded:** Forces the Matrox card to capture audio from the video signal and outputting embedded audio.
  - **AES:** Forces the Matrox card to capture and output audio through the [AES/EBU](#) connectors.
  - **Embedded AES:** Forces the Matrox card to capture audio from the video signal and outputting it to the [AES/EBU](#) connectors.
  - **AES Embedded:** Forces the Matrox card to capture audio from the [AES](#) connectors and outputting the audio as streams in the video signal.
  - **Loop:** Moves the audio from the inputs to the outputs without being down-mixed by Viz Engine.
  - **Default:** Audio is off.

---

**Note:** Matrox X.mio1 only supports balanced audio through [XLR](#) connectors. X.mio2 only supports unbalanced audio through [BNC](#) connectors.

---

### To manually activate an audio device


1. Open the configuration file.
2. Go to **SECTION AUDIO\_CONFIG** and locate the **Available0** setting.
3. Activate the identified audio device (**Available0**) by adding its name to the **AudioDevice0** setting.
  - For multiple outputs, more than one device can be added as AudioDevice1, AudioDevice2 and so on; however, this is not very common.
4. Save the configuration file.

-----  
**Example:** AudioDevice0 = Realtek HD Audio output  
-----

---

## 6.3 Bubble Information

**Figure 11:** Bubble Information

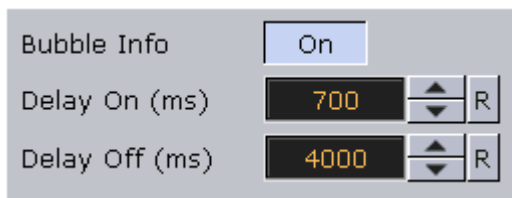


Pop-up descriptions can be displayed when holding the mouse cursor over certain elements in the Viz Artist 3 user interface. In the Bubble Information section, the pop-up descriptions can be enabled or disabled, and the delay times for appearing and disappearing can be modified.

- **Bubble Info:** Enables or disables the bubble information (pop-ups) in the Viz Artist 3 user interface.
- **Delay On (ms):** Sets the amount of time in milliseconds before the bubble appears. Default is 1500 ms.
- **Delay Off (ms):** Sets the amount of time before the bubble disappears. Default is 4000 ms.

-----  
**Note:** A millisecond is one thousandth of a second.  
-----

## 6.4 Camera

Figure 12: Camera

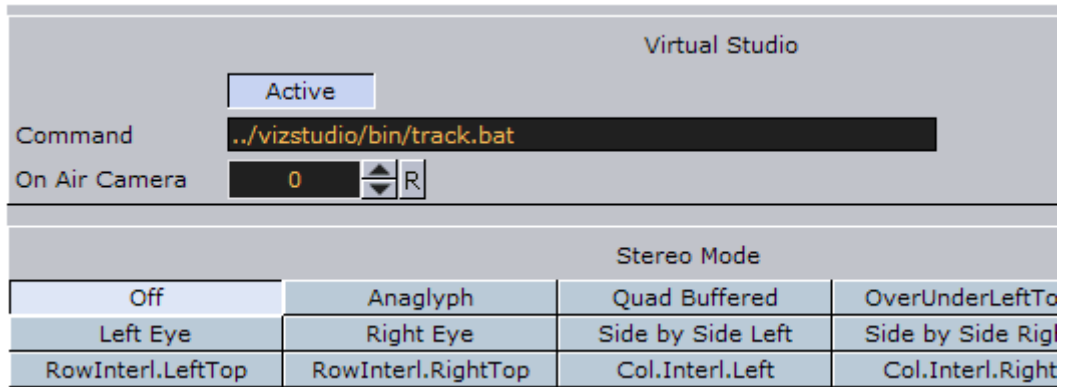

In this section, special camera behavior settings that are used for virtual studio setups, can be defined. Viz IO is used as the studio configuration and calibration tool for enabling connectivity and control between all required studio devices such as cameras, routers, VTRs, video servers, audio mixers and other studio equipment.

- **Virtual Studio:** When set to *Active* the tracking process will be started when Viz Engine is started.
- **Command:** Sets the path to the .bat file that will start the tracking process. If a valid path is given, Viz Engine will start Viz IO during startup.
- **On-air camera:** Activates the selected camera that should be used when setting the scene in on air mode. The camera is controlled by an external tracking device.

Stereo Mode settings will only take effect onair, during artist you won't see this rendering behaviour!

- **Anaglyph:** Renders a classical red/blue image.
- **Quad Buffered:** When using nVisio glasses together with a monitor with a frequency > 100Hz the image for the left/right eye will be shown alternately and the glasses will darken the other eye. This configuration provides the full resolution.
- **OverUnderLeftTop/OverUnderRightTop:** Both images will be drawn beneath each. Either side can be drawn first. The image height will be halved, providing half resolution
- **Left Eye/Right Eye:** Either the left or the right eye image will be rendered for dual-channel setups in combination with a Video Wall / Stereo Distributor. Full resolution.
- **SideBySideLeft/SideBySideRight:** Both images will be rendered side by side, either left or right first. The image width will be halved, providing half resolution.
- **RowInterlacedLeftTop/RowInterlacedRightTop:** Both images are rendered interlaced underneath each other, either starting with left or right image.
- **ColumnsInterlacedLeft/ColumnsInterlacedRight:** Both images are rendered interlaced beneath each other, either starting with left or right image.

-----  
**IMPORTANT!** If you want to playout 3D Stereo Clips, you need to start the enigne with the -3D parameter. This is for clips only!  
-----

Additionally, to control the behaviour of clip playback, the following shared memory variables exist:

```
vizrt.com.StereoClip.changed  
vizrt.com.StereoClip.A.HScale  
vizrt.com.StereoClip.A.VScale  
vizrt.com.StereoClip.A.HSoft  
vizrt.com.StereoClip.A.VSoft  
vizrt.com.StereoClip.A.XTrans  
vizrt.com.StereoClip.A.YTrans  
vizrt.com.StereoClip.A.XAnchor  
vizrt.com.StereoClip.A.YAnchor  
vizrt.com.StereoClip.A.Sharp  
vizrt.com.StereoClip.B.HScale  
vizrt.com.StereoClip.B.VScale  
vizrt.com.StereoClip.B.HSoft  
vizrt.com.StereoClip.B.VSoft  
vizrt.com.StereoClip.B.XTrans  
vizrt.com.StereoClip.B.YTrans  
vizrt.com.StereoClip.B.XAnchor  
vizrt.com.StereoClip.B.YAnchor  
vizrt.com.StereoClip.B.Sharp
```


### See Also

- Script Documentation (Vizrt -> Viz 3.3 -> Documentation).

---

## 6.5 CGP Panasonic

Figure 13: CGP Panasonic

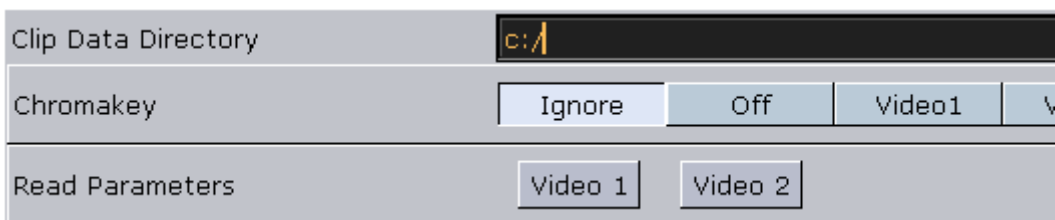

This section is only visible when Viz is connected to a Panasonic AV-CGP500P (CGP) device.

With the CGP all video input and output is automatically handled by the CGP device. In a *normal* Viz installation with a built-in video card (for example ) Viz will handle a lot of the video input and output itself.

Although the CGP device handles the video, Viz still does all the rendering of graphics with video inputs (live video textures) or renders on top of video (also using live video textures (looks like DVE)).

The CGP's chroma keyer is used to generate a key for a video input based on color information in the video.



- **Clip Data Directory:** Sets the clip directory for clip transfer when connected to a CGP device. Default directory is C:\ drive. Panasonic's clip format suffix is \*.vsf.
- **ChromaKey:** Sets the chroma key mode. Alternatives are Ignore, Off, Video1 and Video2.
- **Read Parameters:** Enables synchronization of the virtual video modes 1 and 2. Alternatives are Video 1 and Video 2.

Tip: For more information on how the CGP device adjusts chroma keying, see the Panasonic AV-CGP500P Operating Instructions manual, and in particular the *Chroma Key Adjustment Tool* section.

### See Also

- [CGP Panasonic Output Format](#)

## 6.6 Communication

Figure 14: Communication

Port Number:	6100		
Additional Communication	None	Udp	Udp&Multicast
Udp&multicast Port Number	6100		
Multicast Ip Address	224.1.1.1	R	

In this section, network connections can be set. Any external control software, for example Viz Content Pilot, uses TCP/IP network connections to send commands to the Viz Engine renderer engine. Viz Artist expects the commands at the port that is defined here. For a single pipe (one display) system, the default value (6100) should normally not be changed.

- **Port Number:** Sets a general communication port for receiving external commands when in On Air mode. Changes to this setting must be reflected on the client side. Default is port 6100.
- **Additional Communication:** Enables commands to be sent to Viz Engine on UDP and Multicast or a combination of the two. This is used by Viz Video Wall.
- **Udp&multicast Port Number:** Sets the port number for the computers that share the same virtual IP address.
- **Multicast IP Address:** Sets the shared virtual IP address.
- **Performance Update Interval:** Sets how often Viz Engine should update the [Performance Bar](#) when it is opened.

**IMPORTANT!** Viz 3.2 and later allows up to 255 connections; however, the number of connections is also limited to the available main memory and texture memory on the graphics card (see how [To limit the number of TCP connections](#)).

### To limit the number of TCP connections

Viz 3.3 and later allows you to limit the number of TCP connections to Viz.

1. Open the Viz configuration file (i.e. *Viz-<hostname>-0-0.cfg*) found in the Viz3 program folder.
2. Under **SECTION COMMUNICATION** set `max_tcp_connections` to the number of TCP connections required.
  - If the number is set to 1 the first control application connecting to Viz will get exclusive control over Viz.

.....  
**Note:** This setting applies to the default port (6100) and the [Multiplexing Ports](#).  
.....

---

## 6.7 Clock Formats

**Figure 15:** Clock Formats

Format 1	hh:mm:ss	Format 11	
Format 2	h:mm:ss	Format 12	
Format 3	hh:mm	Format 13	
Format 4	h:mm	Format 14	
Format 5	hh:mm:ss.dd	Format 15	
Format 6	sss.dd	Format 16	
Format 7	ssss	Format 17	
Format 8	m:ss.dd	Format 18	
Format 9	dddd	Format 19	
Format 10	mm:ss	Format 20	

In this section, twenty (20) various digital date and time formats can be set.

- **Format 1–20:** Sets and enables the clock formats that may be selected in Viz Artist during scene design.

.....  
**Tip:** Add a font GEOM in Viz Artist to see how the clock formats can be used.  
.....

## 6.8 Database

Figure 16: Database

The screenshot shows a configuration window for a database. The settings are as follows:

Host Name	localhost
Hub	VizDbServer
Port Number	19396
User	Gerhard_S
Replication Timeout (sec)	15
Show Auto Login	Yes
Auto Login	No
Import by Name	No
Popup Server Messages	Enabled ('Disabled' works on localhost only!)
Date Format	EU US
Archive Bit-Mode	32 Bit 64 Bit
Temporary Folder	c:/temp

Additional text: (Enable 32 Bit only if you want to ensure created by this version of Viz Artist can be imported by pre-2310 versions. They cannot be larger than 2 GB!)

In this section, the database (Viz Graphic Hub) connection settings are configured.

- **Host:** Sets the name of the Viz Graphic Hub naming service. The naming service will always be a one to one map to the hostname of the machine running Viz Graphic Hub.
- **Hub:** Sets Viz Graphic Hub server name.
- **Port Number:** Sets the listener port number for Viz Graphic Hub. The default port number is 19396, and should normally not be changed..
- **User:** Sets the default user.
- **Replication Timeout (sec):** Sets the maximum waiting time before a failover is initiated from the main to the replication Viz Graphic Hub.
- **Show Auto Login:** Enables (Yes) the user to check the Auto login check-box in the Viz Graphic Hub login window. When disabled (No), the Auto login check-box is hidden.
- **Auto Login:** Enables or disables automatic login to Viz Graphic Hub. This will effectively disable the login screen for Viz Engine and Viz Artist.
- **Folder Type Highlighting:** When enabled this will highlight the folders that contain content matching the current Viz Artist's Server view (for example Scene, Object, Material, Image, Font, Audio and so on).
- **Popup Server Messages:** Enables or disables popup server messages. Disabled only works on localhost.
- **Date Format:** Sets the date format to EU (DD.MM.YYYY 13:54) or US (MM/DD/YY 01:54).
- **Archive Bit-Mode:** Sets the bit-mode in which the archive will be saved.

-----  
**Note:** For compatibility, 32-bit should be enabled if scenes will be imported to Viz Artist 3 versions prior to build 2310.  
-----

- **Reset Startup Default Folder:** Resets the startup folder. If Viz Artist is unable to start due to problems with the last saved server view, clicking the Reset button will reset the Server view to its top node.
- **Temporary Folder:** Sets the location of the temporary folder that is used to save temporary plug-in data. The folder can be a local drive, mapped drive or a Universal Naming Convention (UNC) path.

-----  
**IMPORTANT!** Make sure the Temporary Folder is configured with read and write access rights.  
-----

---

## 6.9 Font Options

Figure 17: Font Options

Default	Default			
Japanese Industry Standard Code	JIS			
Shifted Japan. Industry Standard	SJIS			
Extended Unix Code	EUC			
Unicode	Unicode			
UTF-8	UTF-8			
Default Text Orientation	Left	Center	Right	
Default Text V.-Orientation	Top	First Line	Center	
Default Text Direction	Left to Right	Right To Left	Top To Bottom	
Font Handling	Font file	Complex script		
Font Import	File (Standard)	Windows (Advanced)		
Blur Import	Blur 1	Blur 2	Blur 3	Blur 4
Outline Import	Outline 1	Outline 2	Outline 3	
Calculate Max Bounding Box Size	Inactive			
Replace missing Characters with	0	↕	R	(ASCII Value)

In this section, the font encoding can be configured.


- **Font Options:** Sets the font encoding. Available options are:
  - **Default:** Sets the font encoding to single character interpretation (limited to 255).

- **Japanese Industry Standard Code (JIS):** Sets Japanese industry standard code character encoding.
- **Shifted Japanese Industry Standard Code (SJIS):** Sets the newer Shift JIS character encoding standard which sets aside certain character codes to signal the start of a two-character sequence.
- **Extended Unix Code (EUC):** Sets Extended Unix Code (EUC) character encoding that is a multibyte character encoding system used primarily for Japanese, Korean, and simplified Chinese.
- **Unicode:** Sets the Unicode character encoding where every two characters are interoperated as one (not widely used).
- **UTF-8:** Sets UTF-8 (8-bit UCS/Unicode Transformation Format) character encoding that is a variable-length character encoding for Unicode.
- **Default Text Orientation:** Sets the default horizontal text orientation. Available options are; Left, Center and Right.
- **Default Text V. Orientation:** Sets the default vertical text orientation. Available options are; Top, First Line, Center and Bottom.
- **Default Text Direction:** Sets the default text direction. Available options are; Left to Right, Right to Left and Top to Bottom.
- **Font Handling:** Sets the font handling. Available options are Font file or Complex script.
  - **Font file:** Sets the font kerning to Font file that is mainly used for languages written from left to right.
  - **Complex script:** Sets the font kerning to Complex script. Complex script is mainly used for languages written from right to left and/or that one character can be are composed of one or several [Glyphs](#).
- **Font Import:** Sets the Font import. Available options are; File (Standard) and Windows (Advanced).
  - **File (Standard):** Imports and stores fonts on the database.
  - **Windows (Advanced):** Stores only the font name on the database. For this to work the font must be installed on the Windows system where Viz Engine resides.
- **Blur Import:** Enables blur levels for fonts used in Viz 2.x scenes. These options will make sure that fonts that are imported to Viz 3.x will be recreated with all blur levels used in Viz 2.x. Available options are; Blur 1-4.
- **Outline Import:** Enables outline levels for fonts used in Viz 2.x scenes. These options will make sure that fonts that are imported to Viz 3.x will be recreated with all outline levels used in Viz 2.x. Available options are; Outline 1-3.
- **Calculate Max Bounding Box Size:** Enables Viz 3.x to calculate the bounding boxes as they were calculated in Viz 2.x. In Viz 3.x a text object's bounding box height will increase if a capital character is entered (e.g. an umlaut (double dots)). In viz 2.x the bounding box height was always the same and independent of the characters in the text object. Available options are Active and Inactive. Default is Inactive (false).
- **Replace missing Characters with:** Replaces a missing font character in a font file with a default font character. The Unicode value refers to the decimal value of the replacement character in the Unicode table (valid values are 0-65533). Normal usage would select a \* ( 42 ) or \_ ( 95 ).

---

## 6.10 Global Input

Figure 18: Global Input

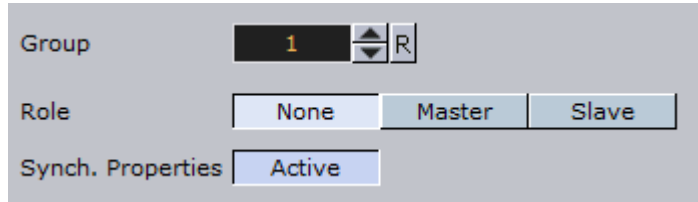

The Global Input settings influence the generation and handling of *Six Degrees of Freedom* (6DoF) messages that can be distributed to several Viz Engines.

6DoF is used when working in 3D space in combination with special input devices such as a mouse. A mouse uses two coordinates (xy) which Viz is able to translate into three coordinates (xyz) based on a grid.

- **Group:** Defines which multicast group the generated or received messages belong to. If more than one group is to be defined, a unique Group number must be set for each group.
- **Role:** Defines how messages are generated and processed. Alternatives are; None, Master and Slave.
  - **None:** Messages are only generated and processed on the local Viz Engine.
  - **Master:** A Master creates messages for himself and the defined group.
  - **Slave:** A Slave reads and processes 6DOF messages but is not allowed creating them.
- **Synch. Properties:** Activates/deactivates synchronization of Viz Engine scene properties.


### To synchronize multiple Viz Engines

1. Start Viz Config on all involved render machines.
2. Set the same Group ID for all engines, and set Synch. Properties to Active.
3. Save and close all Viz Configs.
4. Open the Control Panel on all render machines, and make sure that you deactivate all unused network connections.
  - Viz Engine always uses the first network connection setup by the Windows operating system.
  - Synchronized engines work within the same network segment only because it is using multicasts, hence, it is important to use the right connection.
  - You can also determine the first connection by setting a manual metric in Windows: <http://support.microsoft.com/KB/299540>.
5. Start all Viz Engines again.
6. Create a simple test scene with a geometry and the Synchronized Properties plug-in (Built Ins > Container > Global) on the same container.
7. Save the scene and open it on all involved engines.
8. Move the geometry on one engine.
  - All the other engines will show the same object movement.

---

## 6.11 Import 3D Options

Figure 19: Import 3D Options

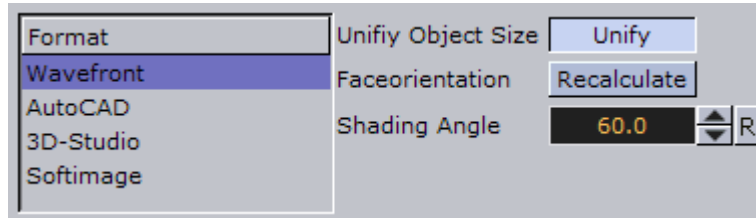

In this section, parameters influencing the import of 3D objects can be configured. There are four different formats; Wavefront, AutoCAD, 3D-Studio, and Softimage.

The Wavefront, AutoCAD, and 3D-Studio formats have three available controls:

- **Unify Object Size:** If enabled, all vertices are recalculated during import in a way that the object centre is moved to the origin (0,0,0), and the size of the object is 100 cm in its largest extent. If disabled, all vertices retain their values as defined in the original file. An object could appear invisible in a Viz Artist 3 scene because the object is translated a lot from the origin or is scaled up or down a lot. It could be necessary to deactivate the unification to be able to recombine several separately imported objects that must keep their size and relative position.
- **Face Orientation:** Polygonal 3D models often do not have a consistent face orientation, but for performance reasons, the Viz Artist 3 renderer expects that all faces of an object point to the same direction. If enabling this function, Viz Artist 3 tries to rearrange the orientation of the object faces during import.
- **Shading Angle:** If the 3D object has no normal vector information, Viz Artist automatically recalculates the normal's from the geometry to make lighting possible. This recalculation is influenced by the shading angle, which acts as a threshold between sharp and soft edges.

---

**Note:** A shading angle value of 60 means that an edge between two faces is considered to be a soft edge for angles below 60 and a sharp edge above this level. 60 is the default shading angle.

---

The Softimage format has two available controls:

- **Classic Scaling:** Changes Softimage rotation order to conform to the internal rotation order of Viz.
- **Enable Animations:** Allows import of saved Softimage animations.

---

## 6.12 Image File Name Convert

Figure 20: Image File Name Convert

	replace		with	
1				
2				
3				
4				
5				
6				
7				
8				
9				

In this section, nine (9) different replacement configurations can be set for image file names. For example; If an image file name starts with the string *Replace* this part of the file name can be replaced by the string *With*.

- **Replace:** Defines the string that will be replaced.
- **With:** Defines the replacement string.



## 6.13 Maps

Map Server configuration window showing various settings:

- Map Server: Active
- Server: <hostname>
- Project: <projectname>
- Available: VizExample\_Globe.tpl, vizrt styles Cylindrical.tpl, vizrt styles Globe.tpl, vizrt styles Mercator.tpl
- Map Size: Width 1024, Height 1024
- Cache: Active
- Cache Directory: c:/temp
- Memory (Images): 32
- On disk (Days): 15
- Virtual Earth Attribution: Dynamic
- Attribution Font: Verdana
- Bold: On
- Italic: Off
- On Top: Off
- On Right: Off

- **Map Server:** Enables or disables Viz World Server (WoS) connection for Viz World Client (WoC).
- **Server:** Sets the Viz World Server host.
- **Project:** Sets the default map project that will be opened with the client application.
- **Available:** Lists all available Viz World Server projects.
- **Map size:** Sets the default map size that will be used with the client application.
- **Cache:** Enables caching of maps for faster preview and fetching of maps. Especially useful for journalists and operators using Newsroom Component and Viz Trio respectively.
- **Cache Directory:** Sets the cache directory for cached maps which can be a local drive, mapped drive or a Universal Naming Convention (UNC) path.

-----  
**IMPORTANT!** Make sure the Cache Directory folder is configured with read and write access rights.  
-----

- **Memory (Images):** Sets the number of images to keep in memory.
- **On disk (Days):** Sets the number of days to save images on disk.
- **Virtual Earth Attribution:** Adds an attribution to the map. Alternatives are; Static and Dynamic.
  - **Dynamic:** Displays the attribution when a Microsoft Virtual Earth image is in view and disappears when the image is out of view.

- **Static:** Displays the attribution as long as there is a Microsoft Virtual Earth image in the scene.
- **Attribution Font:** Sets the font for the Virtual Earth attribution.
- **Bold:** Sets the Virtual Earth attribution font to **bold**.
- **Italic:** Sets the Virtual Earth attribution font to *italic*.
- **On Top:** Places the Virtual Earth attribution image to the top in the screen. Default is bottom.
- **On Right:** Places the Virtual Earth attribution image to the right in the screen. Default is left.

## 6.14 Matrox

In Viz Artist 3.3 it is possible to assign Matrox' in and out channels to Viz Artist's in and out channels.


The GUI shows a tab for General and, according to the installed hardware, tabs for VideoOut, VideoIn, and ClipIn. Depending on your installed hardware there might be different tabs available.

This section contains information on the following topics:

- [General](#)
- [VideoOut](#)
- [VideoIn](#)
- [ClipIn](#)

### 6.14.1 General

**Figure 21:** General Matrox configuration

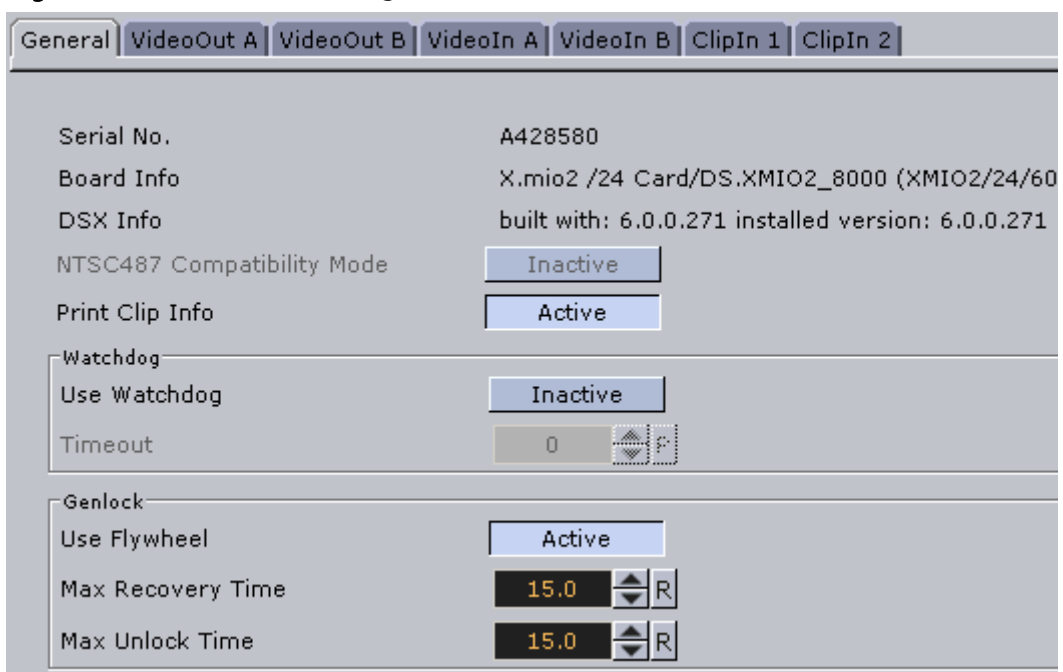


The General tab shows information about the installed hardware.

- **Serial No.:** Shows the serial number of the installed Matrox board.
- **Board Info:** Shows the model and type of the Matrox board.
- **DSX Info:** Shows the software version and driver version.
- **NTSC487 Compatibility Mode:** *For future use.* Enables the NTSC 487 compatibility mode. Default mode is Inactive.
- **Print Clip Info:** When activated this setting enables printing of clip information to the console; however, such information may cause the render loop to stall. Default mode is Inactive.
- **Use Watchdog:** When activated this setting enables the Matrox X.mio watchdog feature. It defines what kind of key is produced when the watchdog takes over control. Default mode is Inactive.
- **Timeout:** Defines the time in milliseconds until the watchdog takes over control. This value should not be smaller than the time of two fields/frames. Default value is 999 milliseconds.
- **Use Flywheel:** When activated the Matrox card adopts a tracking mode if the genlock signal is interrupted or lost that maintains the signal frequency until the source genlock signal is regained. Default mode is Active.
- **Max Recovery Time:** Represents the time in milliseconds (ms) provided to the flywheel to attempt to regain the genlock before an abrupt jump to the locked state is performed. Default value is 15.
- **Max Unclock Time:** Represents the time in milliseconds (ms) provided to the flywheel to remain in the unlocked state before switching to the free running state. Default value is 15.

## 6.14.2 VideoOut

Figure 22: VideoOut configuration

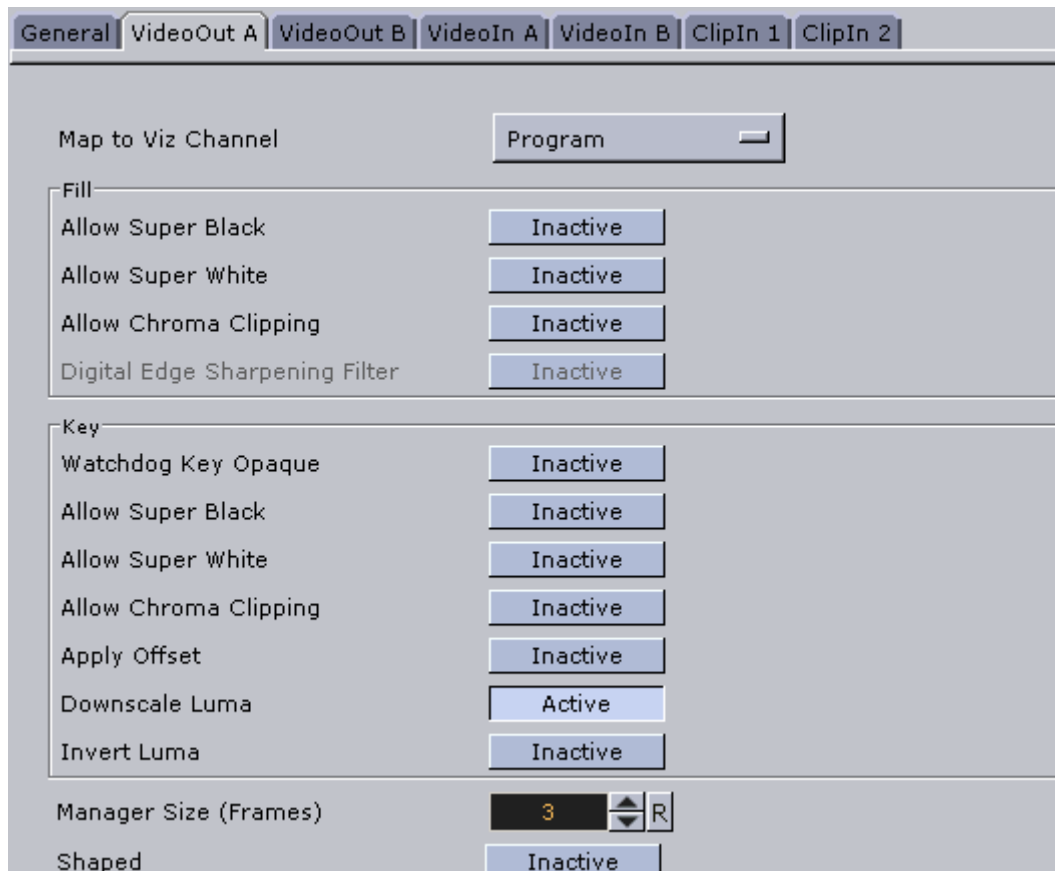

The VideoOut tab displays a simple and an [Advanced Properties and Parameters](#) view. The simple view shows the mapped Viz Artist channel. In the advanced view every setting of the output channel can be controlled. The switch between the simple and the advanced view is done with the small black triangle on the right hand side.

- **Map to Viz Channel:** Decides which Viz Artist video out channel is mapped onto this Matrox video out channel. The dropdown gives a choice between the available channels. Only the channels not already taken are shown.
  - **Unused:** Do not use this Matrox channel for output.
  - **Program:** Plays out the Program signal of Viz Artist.
  - **Preview:** Plays out the Preview signal of Viz Artist.

On a single channel configuration VideoOutA is usually mapped to Program and VideoOutB to Preview, whereas on a dual channel configuration usually the first channel maps VideoOutA to Program and the second channel VideoOutB to Program.


This section also contains information on the following topics:

- [Advanced Properties and Parameters](#)
  - [VideoOut fill settings](#)
  - [VideoOut key settings](#)

- [Manager size, shaped and repeat mode settings](#)
- [VideoOut VBI settings](#)

## Advanced Properties and Parameters


**Figure 23:** VideoOut fill settings

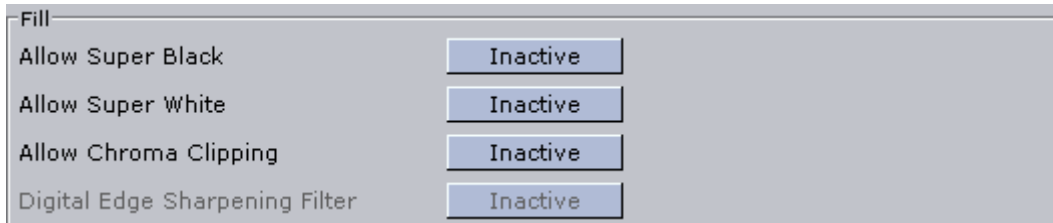

Group for fill component of the video output.

- **Allow Super Black:** Determines whether or not to clip an output video signal that is under 7.5 [IRE units](#). Default mode is Inactive.
- **Allow Super White:** Determines whether or not to clip an output video signal that is over 100 [IRE units](#). Default mode is Inactive.
- **Allow Chroma Clipping:** Determines whether or not to clip over-saturated chroma levels in the active portion of the output video signal. Default mode is Inactive.
- **Digital Edge Sharpening Filter:** Applies an edge sharpening filter to digital output video. Default mode is Inactive. SD configurations only.

**Figure 24:** VideoOut key settings

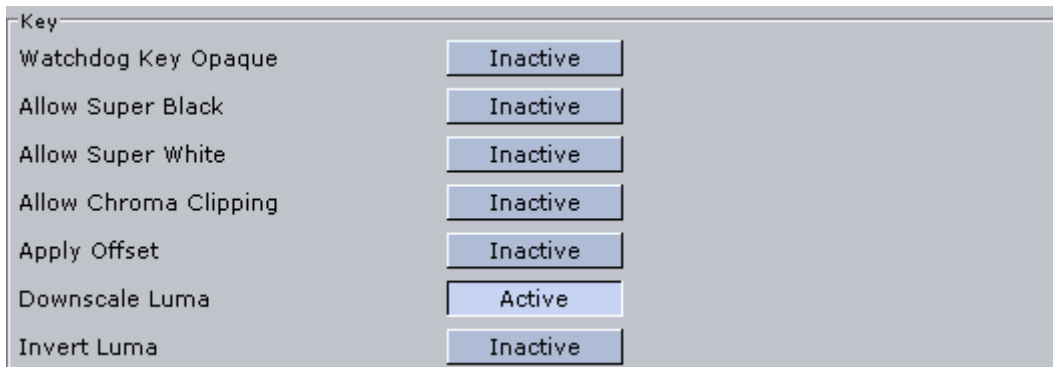

Group for key component of the video output.

- **Watchdog Key Opaque:** Specifies if the output key must be opaque or transparent when the watchdog unit activates. Default mode is Inactive.
- **Allow Super Black:** Determines whether or not to clip an output video signal that is under 7.5 [IRE units](#). Default mode is Inactive.
- **Allow Super White:** Determines whether or not to clip an output video signal that is over 100 [IRE units](#). Default mode is Inactive.
- **Allow Chroma Clipping:** Determines whether or not to clip over-saturated chroma levels in the active portion of the output video signal. Default mode is Inactive.
- **Apply Offset:** Applies an offset to the luminance values such that the inverted result still falls within the 16–235 range. Default mode is Inactive.
- **Downscale Luma:** Compresses the luminance range of the output key signal from 0–255 to 16–235. Default mode is Active.


- **Invert Luma:** Inverts the luminance part of the output key signal (inverts the key). Default mode is Inactive.

**Figure 25:** Manager size, shaped and repeat mode settings



- **Manager Size (frames):** Sets the number of frames available in the on-board memory for output. A too high value may cause memory problems on the Matrox card. Default value is 3.
- **Repeat Mode:** Defines the way the output should be repeated if Viz Engine is stalled and does not update the output. Default mode is Field. Available modes are:
  - **None:** Does not repeat. Output goes black.
  - **Field:** Repeats the last played field.
  - **Frame:** Repeats the last played frame.
- **3G Level B:** Activates Level B for 3G mode in 1080p 50/60/60M (default mode is Level A).

**Figure 26:** VideoOut VBI settings

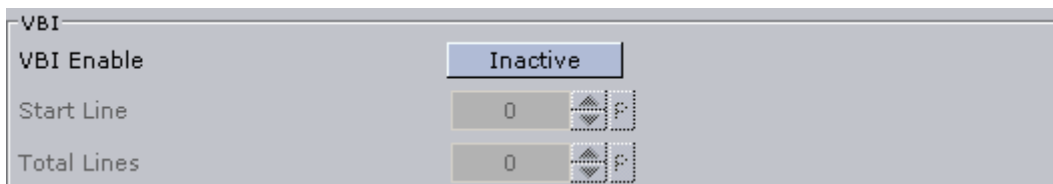


Group for Vertical Blanking Interval (VBI) related settings.

- **VBI Enable:** Enable/disable VBI output.
- **Start Line:** Defines at which line on the output the VBI section should start. Default value is 0 (Off). The minimum VBI values are:
  - NTSC: 7
  - PAL: 6
  - 720p: 7
  - 1080i: 6
- **Total Lines:** Defines how many lines the VBI section in the output should have in total. Default value is 0 (Off). The maximum VBI values are:
  - NTSC: 32
  - PAL: 34
  - 720p: 19
  - 1080i: 30

### 6.14.3 VideoIn

**Figure 27:** VideoIn configuration

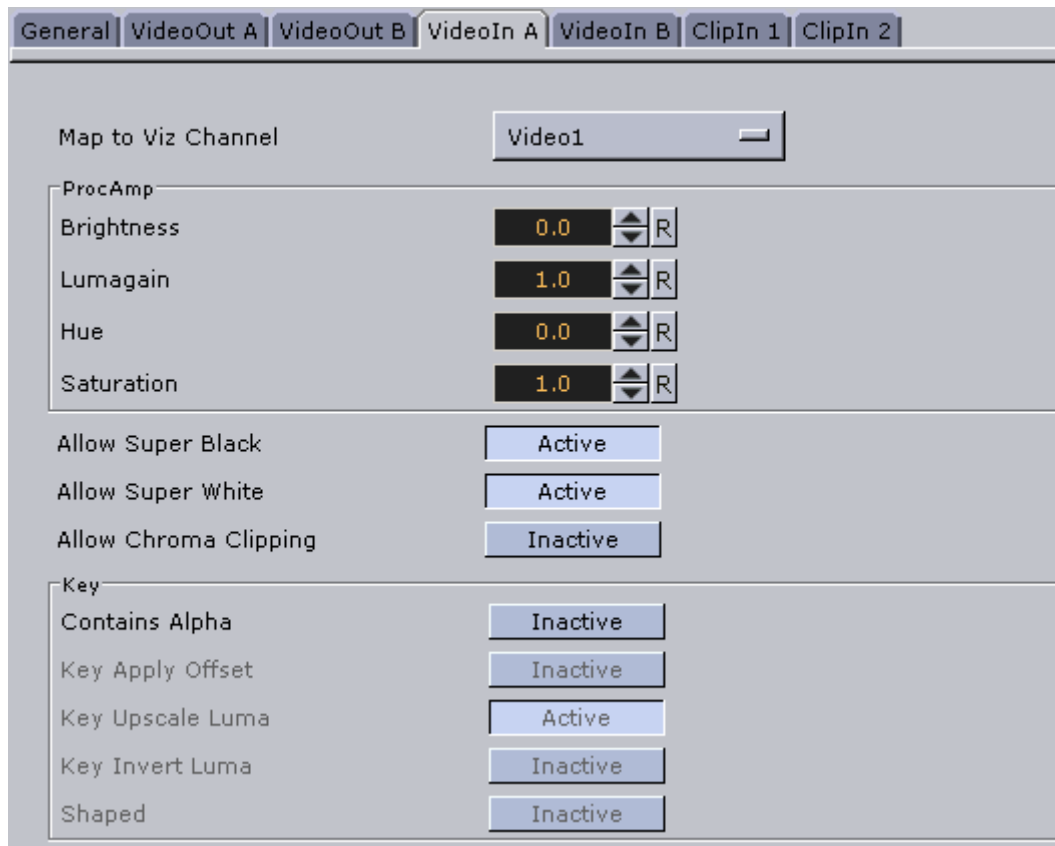

The VideoIn tab comes with a simple and an [Advanced Properties and Parameters](#) view. The simple view shows only the mapped Viz Artist channel. In the advanced view every setting of the input channel can be controlled. The switch between the simple and the advanced view is done with the small black triangle on the right hand side.

- **Map to Viz Channel:** decides which Viz Artist video in channel is mapped onto this Matrox video in channel. The dropdown gives a choice between the available channels. Only the channels not already taken are shown.
  - **Unused:** Do not use this Matrox channel for video input
  - **Video1:** Captured input is available in Viz Artist Video1.

On a single channel configuration VideoInA is usually mapped to Video1 and VideoInB to Video2 and so on whereas on dual channel configuration usually the first channel maps VideoInA to Video1 and the second channel maps VideoInB to Video1. In this case both, the first and the second channel, have one video input configured, namely Video1.

This section also contains information on the following topics:

- [Advanced Properties and Parameters](#)
  - [VideoIn ProcAmp settings](#)
  - [VideoIn super black, white and chroma clipping settings](#)
  - [VideoIn key settings](#)

- [VideoIn video settings](#)
- [VideoIn VBI settings](#)
- [VideoIn audio settings](#)

## Advanced Properties and Parameters


**Figure 28:** VideoIn ProcAmp settings



Group for signal related settings.

- **Brightness:** Sets the relative offset on the luminance component of the incoming video (min./max. values are dynamic and determined by the hardware). Default value is 0 (Off).
- **Lumagain:** Sets the gain on the luminance component of the incoming video (min./max. values are dynamic and determined by the hardware). Default value is 0 (Off).
- **Hue:** Sets the color shift on the chrominance component of the incoming video (min./max. values are dynamic and determined by the hardware). Default value is 0 (Off).
- **Saturation:** Sets the gain on the chrominance component of the incoming video (min./max. values are dynamic and determined by the hardware). Default value is 1 (On).

**Figure 29:** VideoIn super black, white and chroma clipping settings

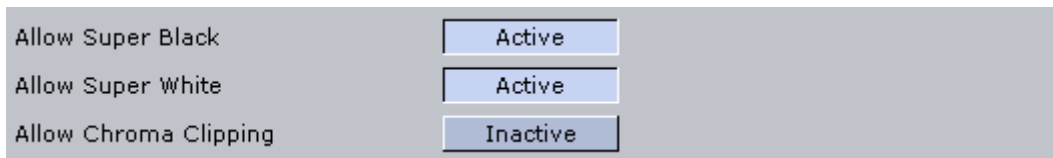

- **Allow Super Black:** Determines whether or not to clip an input video signal that is under 7.5 [IRE units](#). Default mode is Active.
- **Allow Super White:** Determines whether or not to clip an input video signal that is over 100 [IRE units](#). Default mode is Active.
- **Allow Chroma Clipping:** Determines whether or not to clip over-saturated chroma levels in the active portion of the input video signal. Default mode is Inactive.




**Figure 30:** VideoIn key settings



Group for key component of the video input.

- **Contains Alpha:** Enables/Disables use of alpha component. This switch is only enabled on input channels where capture with alpha is supported.
- **Key Apply Offset:** Enables/Disables key offset.
- **Key Upscale Luma:** Enables/Disables key upscale luma.
- **Key Invert Luma:** Enables/Disables key invert luma.
- **Shaped:** Enables/Disables capture in shaped format.

**Figure 31:** VideoIn video settings

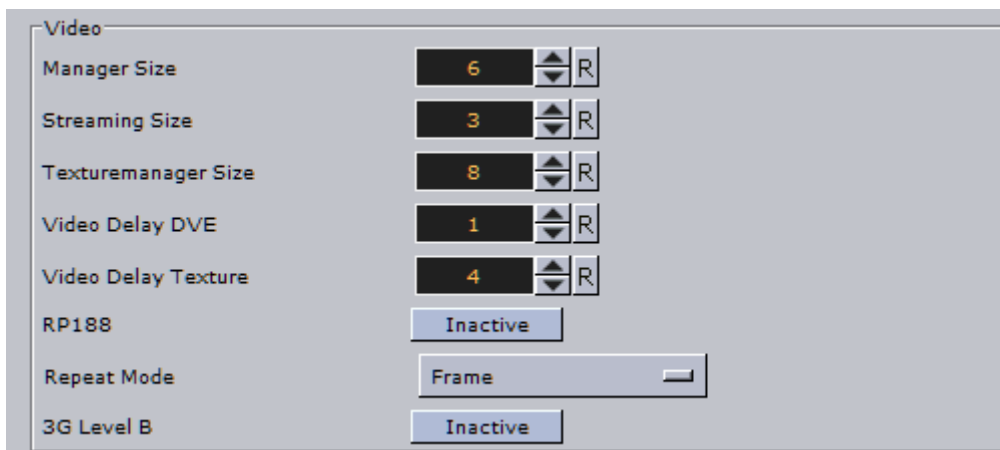


Group for fill component of the video input.

- **Manager Size:** Sets the number of frames available in the on-board memory for capturing. This value is influenced by the input delays specified in the parameters below and will automatically be adjusted if it is too low. A too high value may cause memory problems on the Matrox card. Default value is 6.
- **Streaming Size:** *Not in use.*
- **Texturemanager Size:** Defines the size of the texture buffer in frames. Default value is 8.
- **Video Delay DVE:** Sets the number of frames the live input should be delayed before it can be used as a DVE layer. Similar to the *LoophroughDelay* for Targa boards. Default value is 0 (Off).
- **Video Delay Texture:** Sets the number of frames the live input should be delayed before it can be used as a texture in the scene. Default value is 4.
- **RP188 Enable:** Enables capturing of [SMPTE](#) RP 188 extra information such as [LTC](#) and [VITC](#). Default is Inactive.
- **Repeat Mode:** Determines the behaviour of the video input in case of capture drops. The dropdown gives a choice between
  - **None:** Does not repeat. Input goes black.

- **Field:** Repeats the last field.
- **Frame:** Repeats the last frame.
- **3G Level B:** Activates Level B for 3G mode in 1080p 50/60/60M (default mode is Level A).

**Figure 32:** VideoIn VBI settings

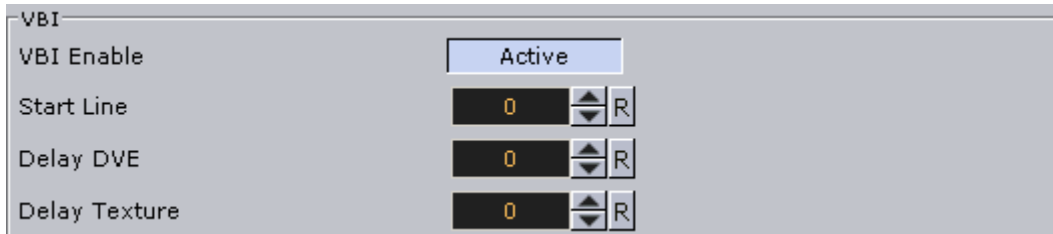

Group for Vertical Blanking Interval (VBI) related settings.

- **VBI Enable:** When set to Active this setting will enable VBI for this channel. Default is Inactive.
- **Start Line:** Defines at which line on the input the VBI section will start. Default value is 0 (Off). The minimum VBI values are (as for VideoOut):
  - NTSC: 7
  - PAL: 6
  - 720p: 7
  - 1080i: 6
- **Delay DVE:** Sets the number of frames the VBI should be delayed before the clip can be used in DVE mode. Default for Viz 3.3 is 0 (Off). For Viz 3.2 the value is 1.
- **Delay Texture:** Sets the number of frames the VBI should be delayed before the clip can be used in texture mode. Default is 0 (Off).

**Figure 33:** VideoIn audio settings




Group for audio related settings.

- **Audio:** When set to Active this setting enables audio capturing on this channel. Default mode is Active.
- **Channels:** Sets the number of audio channels to capture. Default number of channels are 2. Available channel options for AES on X.mio are None, 1, 2, and 4. For AES on X.mio2 and for Embedded the channel options are None, 1, 2, 4, 8, and 16.
- **Delay DVE:** Sets the number of frames the audio should be delayed in DVE mode before it can be mixed to the output. Default value is 4.
- **Delay Texture:** Sets the number of frames the audio should be delayed in texture mode before it can be mixed to the output. Default value is 4.

## 6.14.4 ClipIn

**Figure 34:** ClipIn configuration

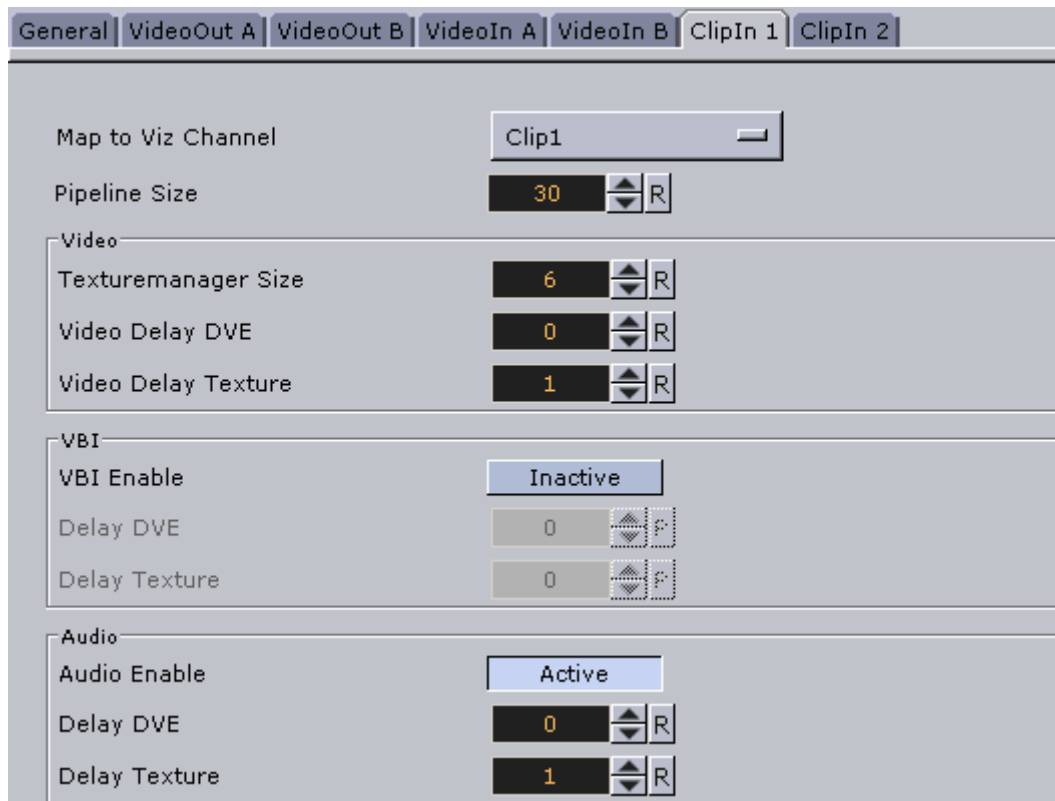

The ClipIn tab comes with a simple and an advanced view. The simple view shows only the mapped Viz Artist channel. In the advanced view every setting of the input channel can be controlled. The switch between the simple and the advanced view is done with the small black triangle on the right hand side.

- **Map to Viz Channel:** Decides which Viz Artist clip in channel is mapped onto this Matrox clip in channel. The dropdown gives a choice between the available channels. Only the channels not already taken are shown.
  - **Unused:** Do not use this Matrox channel for clip input.
  - **Clip1:** Clip playback is available in Viz Artist Clip1.


Usually Matrox' ClipIn1 is mapped to Viz' Clip1 and ClipIn2 to Clip2 and so on.

This section also contains information on the following topics:

- [Advanced Properties and Parameters](#)
  - [ClipIn pipeline size setting](#)
  - [ClipIn video settings](#)
  - [ClipIn VBI settings](#)
  - [ClipIn audio settings](#)
  - [ClipIn key settings](#)

## Advanced Properties and Parameters

**Figure 35:** ClipIn pipeline size setting



- **Pipeline Size:** Defines the number of frames Matrox' internal clip reader buffer should buffer in advance. Default value is 30.


**Figure 36:** ClipIn video settings



Group for fill component of the clip in channel

- **Texturemanager Size:** Texture download buffer size.
- **Video Delay:** DVE Delay of video when used as DVE.
- **Video Delay:** Texture Delay of video when used as Texture.


**Figure 37:** ClipIn VBI settings

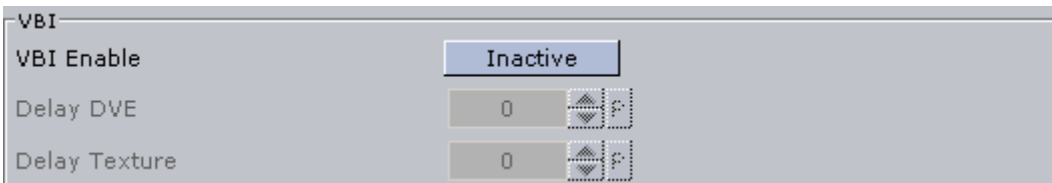

Group for Vertical Blanking Interval (VBI) related settings.

- **VBI Enable:** Defines whether VBI should be used for this channel. Default mode is Inactive.
- **Delay DVE:** Sets the number of frames the VBI should be delayed before the clip can be used in DVE mode. Default value is 0 (Off).
- **Delay Texture:** Sets the number of frames the VBI should be delayed before the clip can be used in texture mode. Default value for Viz 3.3 is 1. For Viz 3.2 the value is 2.

**Figure 38:** ClipIn audio settings

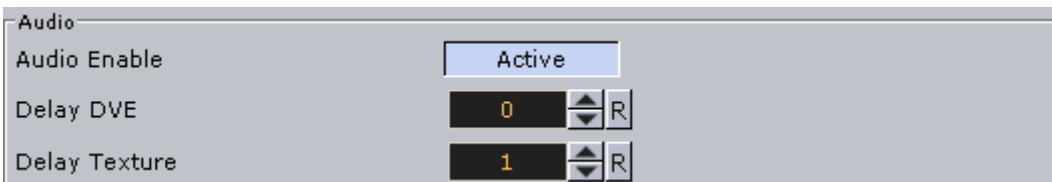


Group for audio related settings.

- **Audio Enable:** When activated, this setting enables audio for this channel. When inactive audio is disabled. Default value is Activated.

- **Delay DVE:** Sets the number of frames the audio clip should be delayed in DVE mode before it can be mixed to the output. Default value is 4.
- **Delay Texture:** Sets the number of frames the audio clip should be delayed in texture mode before it can be mixed to the output. Default value is 4.


**Figure 39:** ClipIn key settings

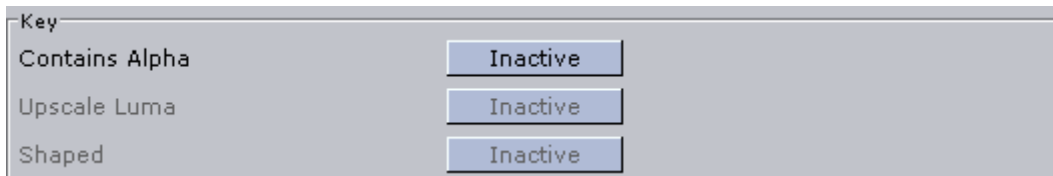

Group for key component of the clip in channel


- **Contains Alpha:** Enables/disables playback of clips with alpha.
- **Upscale Luma:** Enables/disables the default for upscale luma. Per scene setting of this value is set per clip channel under Scene Settings and Video clip options.
- **Shaped:** Defines whether the fill from this channel, when the channel is used in DVE mode, should be interpreted as shaped video during DVE compositing. Default value is Inactive.

**Figure 40:** Repeat and loop mode and reverse fields

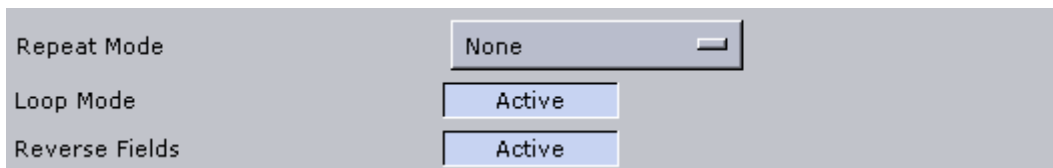

- **Repeat Mode:** Determines the behaviour of the video input in case of capture drops. Available options are None, Field and Frame.
  - **None:** Does not repeat. Input goes black.
  - **Field:** Repeats the last field.
  - **Frame:** Repeats the last frame.
- **Loop Mode:** Enables/disables default for loop mode. Per scene setting of this value is set per clip channel under Scene Settings and Video clip options.
- **Reverse Fields:** Swaps fields when playing interlaced clips with negative playback speed (default setting). Per scene setting of this value is set per clip channel under Scene Settings and Video clip options.

**Figure 41:** ClipIn pending settings

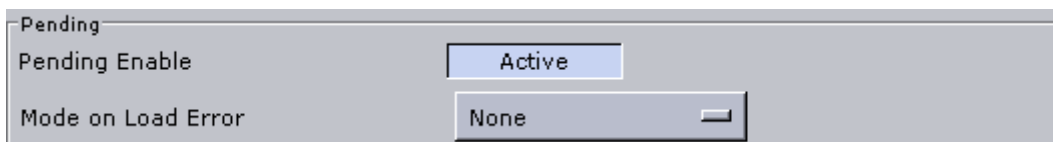

Group for pending support.

- **Pending Enable:** Enables/disables pending clip player for this channel. The pending clip player allows clip loading of another clip while the clip channel is still using the current clip.
- **Mode on Load Error:** Determines the behaviour of the current clip when loading of the pending clip fails.

- **None:** Current clip mode is not changed.
- **Stop:** Performs a Stop command on the current clip.
- **Pause:** Current clip enters pause mode.
- **Flush:** Unloads the current clip.

---

## 6.15 Memory Management

Figure 42: Memory Management

Free Image Data	<input type="radio"/> No	<input checked="" type="radio"/> On-air	<input type="radio"/> Always	
Free Images	<input checked="" type="checkbox"/> On			
Free Fonts	<input checked="" type="checkbox"/> On			
Free Memory Threshold (MB)	0 <input type="button" value="▲"/> <input type="button" value="▼"/> <input type="button" value="R"/>			
Preload Textures	<input type="checkbox"/> Off			
Free Now	<input type="button" value="Scenes"/>	<input type="button" value="Geometries"/>	<input type="button" value="Images"/>	<input type="button" value="Fonts"/>

- **Free Image Data:** Loads images into the main memory, and if those images are rendered too, they will be loaded as texture to the graphics card memory as well. Free Image Data gives the possibility to free the image data from the main memory after texture creation. Available options are No, On-air and Always.

**Note:** If there are modifications done to an image then its texture will be rebuild a lot faster if the data already lies in the main memory (instead of re-loading it from the database).


- **No:** Disables the Free Image Data option. This option is faster, but needs a lot of memory.
- **On-air:** Frees image data when in On Air mode, but not in Viz Artist. mode.
- **Always:** Frees image data every time after the texture was created. This option saves a lot of memory but is slower in case of texture rebuilds.
- **Free Images:** Removes unused images (not referenced in a loaded scene) from the Image Pool (main memory and graphics card memory).
- **Free Fonts:** Removes unused fonts from the Font Pool.
- **Free Memory Threshold (MB):** If set to greater than zero (>0) then Viz Engine tries to automatically unload unused Pool objects until the specified amount of main memory is free again.
- **Preload Textures:** When enabled (On), then all images which will be loaded with a scene (they do not need to be rendered) are loaded as textures to the graphics card too. This eliminates the texture creation time during rendering afterwards (e.g. useful when initializing a show or a playlist). Default is disabled (Off).
- **Free Now:** Frees the selected unused Pool objects (Scenes, Geometries, Images, Fonts or all) from the memory.

- **Preload Textures:** If this option is active, then all Images which will be loaded with a scene (they do not have to be rendered) are loaded as texture to the graphics card too. This eliminates the texture creation time during rendering afterwards (useful when initializing Viz Trio shows).

---

## 6.16 Multi Platform Suite

Figure 43: Multi Platform Suite

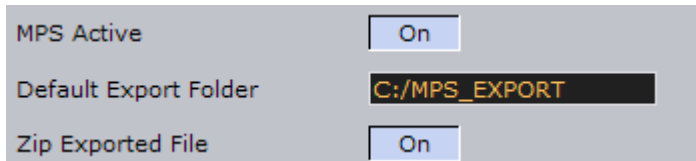

In this section, Viz Multi Platform Suite (MPS) is enabled before MPS scenes are published. Enabling MPS for Viz Artist will display an MPS button (upper right) for publishing MPS files. For more information on how to enable MPS and create MPS files in Viz Artist, see the *Viz Multi Platform Suite user's guide*.

- **MPS Active:** Enables and disables MPS from publishing MPS scenes.
- **Default Export Folder:** Sets the default export folder for MPS scenes which can be a local drive, mapped drive or a [Universal Naming Convention \(UNC\)](#) path.
- **Zip Exported File:** Packages the MPS files to a compressed ZIP file.

-----  
**IMPORTANT!** Make sure the Default Export Folder is configured with read and write access rights.  
-----


### To enable Viz Multi Platform Suite in Viz Artist

1. **Enable** the MPS Active button (*On*).
2. Set the **Default Export Folder** field.
3. Click **Save**.

---

## 6.17 Path Aliases

Figure 44: Path aliases

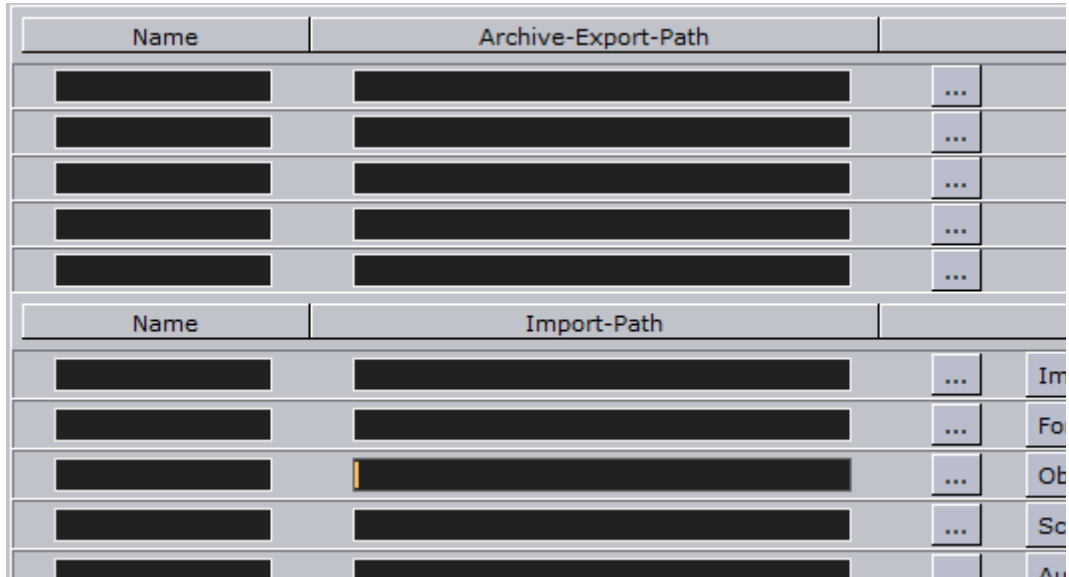

The screenshot shows a configuration window with two tables. The first table, titled 'Archive-Export-Path', has two columns: 'Name' and 'Archive-Export-Path'. It contains five rows, each with a blacked-out name and path, and a '...' button to the right. The second table, titled 'Import-Path', has two columns: 'Name' and 'Import-Path'. It contains five rows, each with a blacked-out name and path, and a '...' button to the right. To the right of the 'Import-Path' table, there are partial labels for other sections: 'Im', 'Fo', 'Ob', 'Sc', and 'Ar'.

In this section, five favorite archive and import paths can be set.

- **Name:** Sets the path alias name for the archive or import path.
- **Path:** Sets the archive or import path which can be a local drive, mapped drive or a [Universal Naming Convention \(UNC\)](#) path.

-----  
**IMPORTANT!** Make sure the archive folder is configured with read and write access rights.  
-----

-----  
**Tip:** Path aliases are available in the Viz Artist's Archive and Import panes.  
-----

### To add a path

1. Enter a descriptive name in the **Name** field
2. Enter a path in the **path** field, or click the **Browse** button to navigate and select a path.
3. Click **Save**.



## 6.18 Output Format

Figure 45: Output Format

Name	Specification	Dimension	Frequency
NTSC	480I_5994_SMPTE259_NTSC	720 x 486	59.94 Hz
NTSC	480I_5994_SMPTE259_NTSC	720 x 486	59.94 Hz
PAL	576I_5000_SMPTE259_PAL	720 x 576	50.00 Hz
PAL	576I_5000_SMPTE259_PAL	720 x 576	50.00 Hz
720p HD Progressive	720P_5000_SMPTE296	1280 x 720	50.00 Hz
720p HD Progressive	720P_5994_SMPTE296	1280 x 720	59.94 Hz
720p HD Progressive	720P_6000_SMPTE296	1280 x 720	60.00 Hz
1080i HD Interlaced	1080I_5000_SMPTE274	1920 x 1080	50.00 Hz
1080i HD Interlaced	1080I_5994_SMPTE274	1920 x 1080	59.94 Hz
1080i HD Interlaced	1080I_6000_SMPTE274	1920 x 1080	60.00 Hz
Fullscreen	FULLSCREEN	1280 x 1024	50.00 Hz
User Defined	USER_DEFINED		

In this section, the output format of the rendering engine can be set. All video hardware configurations are hooked to the video standard set as output format. This setting defines the frequency at which Viz Engine is running.

For PAL and NTSC, the aspect ratio of the format can be set to 4:3 (standard TV) and 16:9 (wide screen TV). Fullscreen sets the output format to the screen size on the current machine.

Figure 46: User Defined output format

User Defined			
X	0	▲▼	R
Y	0	▲▼	R
Width	720	▲▼	R
Height	576	▲▼	R
Frame	50.0	▲▼	R
Aspect	1.333	▲▼	R

Clicking the *User Defined* option opens a panel below the output format list. The user defined output format can be used to fit the requirements of multipipe systems (for example video walls or visionariums). The multipipe settings can be configured in the right part of the editor.

Setup of multipipe systems should be performed by experienced system engineers. For more information, please contact your local Vizrt representative.

- **X:** Sets the horizontal alignment in pixels on the screen. Value is calculated from top left of the screen.
- **Y:** Sets the vertical alignment in pixels on the screen. Value is calculated from top left of the screen.
- **Width:** Sets the width in pixels.
- **Height:** Sets the height in pixels.

- **Frame:** Sets the refresh rate/frequency per frame in hertz (Hz).
- **Aspect:** Sets the aspect ratio. For example 1.778:1 which is 16:9 or 1.333:1 which is 4:3.

-----  
**Note:** Make sure that the physical refresh rate of the graphics hardware and the video hardware is configured correspondingly.  
 -----

There are 3 frequency groups/families; 50, 59,94 and 60 Hz. This defines the output format, and how fast Viz Engine operates. The frequency is the same as frames per second. This will also define the input format that is allowed; hence, an NTSC SD input cannot produce a PAL SD output, but an HD input with the same frequency as the SD output would work.

### 6.18.1 CGP Panasonic Output Format

**Figure 47:** Output Format section for Panasonic AV-CGP500P

Video Mode	Broadcast Graphics
Video Format	HD 1080/59.94 interlaced
Change Video Settings	Call CGP Video Setup Tool and exit Viz

When Viz Engine is connected to a Panasonic AV-CGP500P (CGP) device the Output Format section will show a limited view and offer a button that will open the CGP Video Configuration Tool for further configuration.

- **Video Mode:** Shows the video mode configured by the CGP Video Configuration Tool.
- **Video Format:** Shows the video format configured by the CGP Video Configuration Tool.
- **Change Video Settings:** Opens the CGP Video Configuration Tool where the output format and more can be configured. Clicking this button will consequently also close Viz Config.

-----  
**Tip:** For more information on how the CGP Video Configuration Tool, see the Panasonic AV-CGP500P Operating Instructions manual, and in particular the *Video Configuration Tool* section.  
 -----

#### See Also

- [CGP Panasonic](#)

## 6.19 Plugins

Figure 48: Plug-ins

Geometry	Container	Scene	Shader	Fontstyle	R
Folder	Name	Filename	Version		
Default	2DLine	2DLine.vip	1.0.1		M
Default	2DPatch	2DPatch.vip	1.1.0		M
Default	2DRibbon	2DRibbon.vip	2.0.5		M
Default	AlphaMap	AlphaMap.vip	1.0.2		M
VisualDataTools	AreaChart	AreaChart.vip	1.2.14		M
Default	Arrow	Arrow.vip	1.0.0		M
VisualDataTools	BarChart	BarChart.vip	1.2.14		M

In this section, all installed plug-ins that are identified by Viz as valid plug-ins are listed. Click the Geometry, Container, Scene, Shader, Fontstyle or RenderToDisk buttons to view plug-ins per category.

All plug-ins can individually be activated or deactivated. If a plug-in is inactive it will not be loaded during startup. All inactive plug-ins are listed under the Inactive pane.

-----  
**Note:** Some unlicensed plugins will not be loaded while others will; however, in the latter case a watermark will be shown.  
-----

-----  
**WARNING!** Viz does not load inactive plugins during run-time; hence, if a scene uses a plug-in that is deactivated Viz is unable to activate it.  
-----

### See Also

- [Viz License Information](#).

## 6.20 Render Options

Figure 49: Render Options


Force Sleep	<input type="button" value="Inactive"/>
Keep Editing Aspect	<input type="button" value="Off"/> <input type="button" value="Editor"/> <input type="button" value="No Video"/> <input type="button" value="Resize GUI"/>
Use Display Lists	<input type="button" value="Active"/>
Extended Color Space	<input type="button" value="Inactive"/>
Full Scene AA	<input type="button" value="None"/> <input type="button" value="4 Samples"/> <input type="button" value="8 Samples"/> <input type="button" value="16 Samples"/>
Fill Mode	<input type="button" value="Direct"/> <input type="button" value="Unshaped"/> <input type="button" value="Shaped"/>
Use Fill Mode	<input type="button" value="Inactive"/> (for NLE and Post Production)
Key Mode	<input type="button" value="Add"/> <input type="button" value="Blend"/> <input type="button" value="Subtract"/> <input type="button" value="Rev-Subtract"/> <input type="button" value="One-Src-Alpha"/>
OnAir Resolution	<input type="text" value="800x600"/>
OnAir Mouse Cursor	<input type="button" value="Active"/>
Execute All Animations	<input type="button" value="Active"/>
Use Nvidia Frame Counter	<input type="button" value="Active"/>
Frame Speed	<input type="button" value="Full"/> <input type="button" value="Half"/> <input type="button" value="Third"/> <input type="button" value="Quarter"/> <input type="button" value="Fifth"/> <input type="button" value="Sixth"/>
Image Combining	<input type="button" value="Software"/> <input type="button" value="Multi Texturing"/>
Key Render Mode	<input type="button" value="Single Pass"/> <input type="button" value="Double Pass"/>

In this section, the following render options can be set:

- **Force Sleep:** Enables Viz Engine to sleep on low performance renderer machines (for example a laptop) when Viz Engine is running inside another application such as Viz Trio.
- **Keep Editing Aspect:** Influences SD 16:9 scene designs in Viz Artist mode. Alternatives are; Off, Editor and No Video.
  - **Off:** SD 16:9 scenes are only shown in [Anamorphic widescreen](#) in the 4:3 VGA render window.
  - **Editor:** SD 16:9 scenes are shown using a letter box format during scene editing. On-Air and Viz Engine mode are not affected.
  - **No Video:** SD 16:9 scenes are shown using a letter box format as long as the video out is inactive. If video out is active scenes are shown in [Anamorphic widescreen](#) in Viz Artist mode.
  - **Resize GUI:** Increases the renderer window when editing 16:9 scenes to 16:9 format. On-Air and Viz Engine mode are not affected.
- **Use Display Lists:** Activates or deactivates the use of display lists in the Open GL engine.
- **Extended Color Space:** *Not in use.*
- **Full Scene AA:** Sets the hardware [Anti aliasing](#) (provided by the graphics card). Alternatives are; None, 4, 8, and 16 Samples.
- **Shaped Fill:** **Direct:** Unmodified fill output. **Unshaped:** Brightened fill when AutoKey is enabled. **Shaped:** Fill is premultiplied with key. See also [Shaped video versus unshaped video](#).
- **Use Shaped Fill Setting:** Determines whether the *Shaped Fill* setting should also be applied to post rendering and NLE. If *Shaped Fill* is inactive, and *Use Shaped Fill Setting* is active, then the output looks brighter, as it is required


for keyers. This option will remove inconsistencies between full frames and fields with post rendering and NLE.

- **Key Mode:** *Not in use.*
- **RGB to YUV:** Enables color conversion either in the [Shader](#) or on the Matrox card.
- **On Air Resolution:** Sets the DVI output resolution for Viz Video Wall. Viz Video Wall must activate DVI Output in the [Video Output](#) section for the On Air Resolution to take effect. Alternatives are; Desktop Resolution, 800x600, 1024x768, 1280x1024, 1600x900, and 1600x1200.
- **On Air Mouse Cursor:** Enables a mouse cursor when in On Air mode and using interactive applications. Should be disabled for Viz Video Wall and when DVI out is enabled.
- **Execute All Animations:** When deactivated this setting will enable Viz Engine to only animate visible objects. Default is Active.
- **Use NVIDIA Frame Counter:** When activated this settings takes effect for Standard-PC versions that use NVIDIA cards and drivers that do not return valid frame counter values. When deactivated, an internal timer is used as a timing trigger.
- **Frame Speed:** Enables Viz to run at a slower rate than the actual refresh rate (determined by the screen speed with the use of a g-sync card). This is relevant for video wall applications when the scene (e.g. interactive scenes) cannot run real time (resource intensive), hence, all participating computers are synched to a lower speed. Running at 30Hz (screen speed 60Hz divided by 2) can be acceptable, however, this will affect the animation quality (i.e. will not be as smooth).

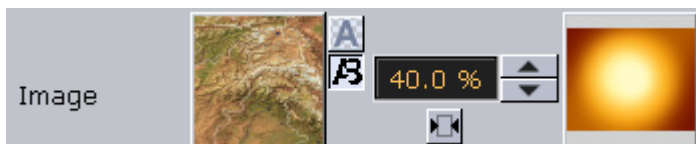

- **Image Combining:** In a texture editor (see Viz Artist) it is possible to set a second texture which will be used for the image combining. The texture editor offers two possible modes: The first mode uses the second image as an alpha channel, whereas the second mode defines a blend between the two textures. Configuring Image Combining to **Software** enables the combination to be calculated entirely on the CPU. Configuring Image Combining to **Multi Texturing** enables the combination to be calculated on the graphics card for combining or blending the two images. In this case the texture creation is faster and memory will be saved as well. Default is Software. If there are performance or memory issues, especially with scenes imported from Viz 2.x, it is recommended to change this setting to Multi Texturing.
- **Key Render Mode:** This configuration is used when the Key Render Mode under Scene Settings in Viz Artist is set to Config, and determines how the key should be rendered:
  - **Double Pass:** Uses two rendering steps as in older 3.x versions. Double Pass should be used for old 3.x scenes for not breaking compatibility, for new scenes Single Pass should be used as it is faster.
  - **Single Pass:** Uses one rendering step as in 2.8 versions.

**Figure 50:** Shaped video versus unshaped video

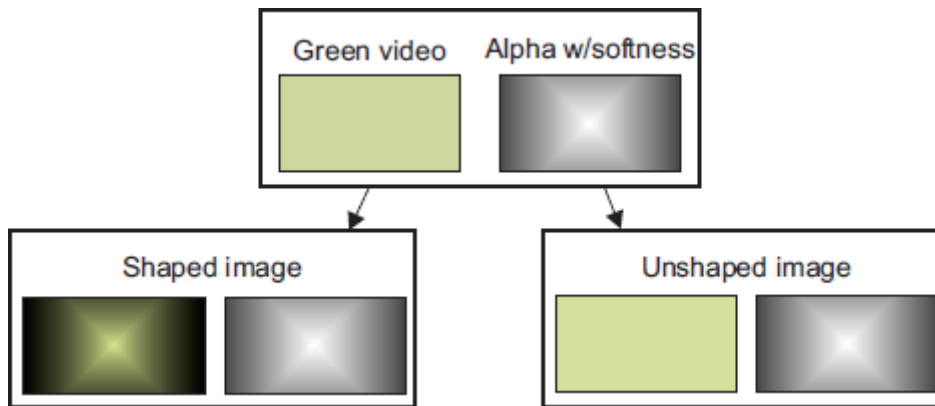

A shaped video image has its video data multiplied by its alpha component while the video data of an unshaped image remains untouched. Shaped images are also referred to as *pre-multiplied alpha images*.

## 6.21 Scene Default Values

**Figure 51:** Scene Default Values

Key	Virtual Set	Full Screen	Overlay	Auto
Animation Motion Path	Smooth	Linear		
Animation Motion Speed	Manual	Linear		
Flicker Filter	Off	Level 1	Level 2	Level 3
Gamma	1.0			
Camera Clipping Plane	Near	50.0	Far	20000.0
Ringing Filter	Inactive			
Show Merge Style Dialog	Active			
Output Region	Full			
Half Edition	Left	Right	Top	Bottom
	Bottom Left	Bottom Right	Bottom Top	
Quarter Edition	Left	Right	Top	Bottom
	Middle Left	Middle Right	Middle Top	Middle Bottom

This section configures the default values for new scenes.

- **Key:** Sets the key mode. Alternatives are; Virtual Set, Full Screen, Overlay, and Auto Key.
- **Animation Motion Path:** Sets the default setting for all new position keyframes. When set to Smooth all handles in the scene output enables a smooth motion path. When set to Linear no handles are available; hence the motion path is not smooth. This setting corresponds with the Path Control setting in the

keyframe editor. When set to manual handles are made available in the spline view that enables speed to be manually handled between keyframes. When set to Linear no handles are available.

- **Anitimation Motion Speed:** Sets the default setting for all new position keyframes.
- **Pixel Fill (Panasonic):** Sets the fill mode for the CGP Panasonic device. Available modes are Active, Inactive and Auto.
  - **Active:** When set to *Active* the output will be rendered at half the horizontal resolution. For example a 1080i output will then be 960 pixels wide which is half of 1920, and the CGP video board will scale this output to full HD resolution. Enabling this setting is good for performance as it will effectively double the pixel fill rate of the CGP; however, it is a trade-off for lower image quality (see also See Also [CGP Panasonic](#) and [CGP Panasonic Output Format](#)).
  - **Inactive:** When set to *Inactive* the output will always be full horizontal resolution.
  - **Auto:** When set to *Auto* the pixel fill will automatically switch between pixel fill *Active* and *Inactive* depending on the current work load of the CGP. For example if pixel fill workload approaches 95% the CGP can switch to rendering 960 pixels instead of 1920 to keep the frame rate, and as soon as the workload drops to for example 40% it can switch back to full resolution rendering.
- **Flicker Filter:** When enabled it will reduce interlaced flicker on high contrast objects. For example small lines and hard objects. Alternatives are; Off, and Level 1–3.
- **Gamma:** Sets the gamma radiation/emission for textures.
- **Camera Clipping Plane:** Sets the range of the virtual camera. Near sets the close range while far defines the far range. Only objects within this range will be rendered.
  - **Near:** Sets the Near value to clip unwanted objects from the foreground. Default value is 50.
  - **Far:** Sets the Far value to clip unwanted objects from the background. Default value is 20000.

---

**Note:** The camera range is where the Z-buffer is within. So if Z-buffer problems arise, they may be solved by editing the camera clipping plane settings.

---

- **Ringing Filter:** Sets the default value for the Ringing Filter. A ringing filter reduces high frequency values in the video signal created by high contrast and color changes in horizontal directions.
- **Show Merge Style Dialog:** Enables the user, when opening a scene in Viz Artist, to open old-style merged objects and expose containers within it.
  - This feature relates to scenes using old-style ordering of containers within merged objects, and solves the problem with auto-follow. When loading such scenes the dialog lets the user decide how to deal with them.
  - Users that are aware of this and decide to keep the old style can deactivate this dialog.
- **Output Region:** Shows which region of the screen Viz is licensed to render.
- **Half Edition:** Allows Viz to render half screen. Available options are; left, right, top, bottom, bottom left, bottom right and bottom top.
- **Quarter Edition:** Allows Viz to render quarter screen. Available options are; left, right, top, bottom, middle left, middle right, middle top and middle bottom.

## 6.22 Spaceball

Figure 52: Spaceball

SpaceBall Mode	None	Plugin	Viz	Both
Object Control	None	Button	Selected	
Button Mode	None	Pressed	Toggle	
Object Control	1	▲▼	R	
Pan only	2	▲▼	R	
Tilt only	3	▲▼	R	
Roll only	4	▲▼	R	
X only	5	▲▼	R	
Y only	6	▲▼	R	
Z only	7	▲▼	R	
Transformation only	8	▲▼	R	
Direction only	9	▲▼	R	
Zoom In	10	▲▼	R	
Zoom Out	11	▲▼	R	
Save Camera Values	12	▲▼	R	
Retrieve Camera Values	13	▲▼	R	

The Spaceball section is used to configure a 3D navigation device.

- **SpaceBall Mode:** Sets special setups where the spaceball should only control specific plug-ins without influencing the scene (objects/camera). Alternatives are; None, Plugin, Viz, and Both.
  - **None:** No setup.
  - **Plugin:** Controls plug-ins.
  - **Viz:** Controls Viz objects.
  - **Both:** Controls both plug-ins and Viz objects.
- **Object Control:** Alternatives are; None, Button, and Selected.
  - **None:** No setup.
  - **Selected:** Modifies only the selected object.
- **Button Mode:** Alternatives are; None, Pressed, and Toggle.
  - **None:** No setup.
  - **Pressed:** When set to Pressed, this mode will trigger an action like a button in a user interface.
  - **Toggle:** When set to Toggle, this mode will set a state. For example when a button is pressed only the dominant axis will be considered in a move, whereas when the button is released all movements are applied.



The numeric fields are used to map the various buttons on the 3D navigation device. This varies by the vendor and the vendors model; hence, the button numbers need to be looked up in the user manual for the respective device.

Button options are: Object Control, Pan Only, Tilt Only, Roll Only, X Only, Y Only, Z Only, Transformation Only, Direction Only, Zoom In, Zoom Out, Save Camera Values, and Retrieve Camera Values.

---

## 6.23 User Interface


This section describes the user interface settings. Some of these settings are also available in Viz Artist.

This section contains information on the following topics:

- [Colors](#)
- [Various](#)
- [Shortcuts](#)

### 6.23.1 Colors

**Figure 53:** User Interface colors

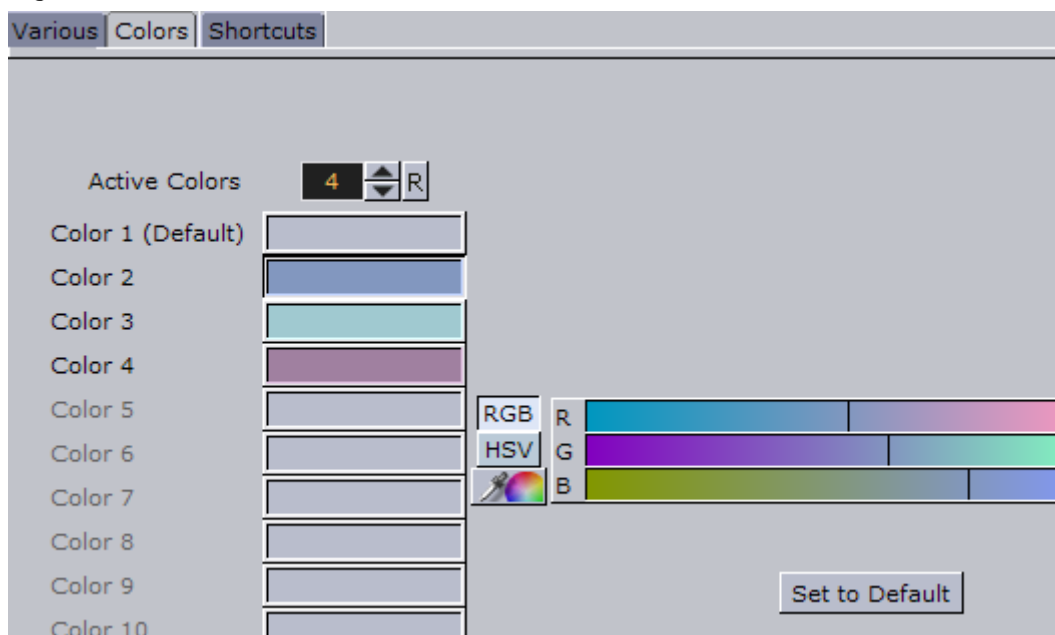

In this section, the color options for the scene tree in Viz Artist can be configured. Colorized containers can make the scene tree more organized. For example, all text containers can be colored gray and tagged Text, while all containers that hold images can be colored green and tagged Image and so on. Four active colors are configured by default with no text descriptions.

The text is scene specific and saved with the scene on Viz Graphic Hub; hence, the colors might change if the scene is edited using another editor with a different color setting.

The color options are available in the Scene Settings pane as the Tree Color Text setting, and available for use in the Scene Tree pane.

### To create a new color



1. Select an unused Color container
2. *Optional:* Add a descriptive text
3. Set the color values
4. Optional: Click the color box and enter a name for it.
5. Click *Save* and restart Viz

## 6.23.2 Various

**Figure 54:** Various user interface settings




- **GUI Icon Font:** Sets the Font type for all icons of elements such as scenes, objects, materials, images, fonts, and audio clips. Complex character sets such as Arabic, Hebrew and Chinese must change the default font type in order to display proper names for the icons.
- **GUI Font Size:** Sets a global font size for the Viz GUI. Alternatives are; 10, 12, and 14 pixels.
- **Scene/font/Audio Icon size:** Sets a size preference for scene, font and audio icons. Icon size can also be switched using the context menu in the server view in Viz Artist; however, a switch in Viz Artist will not be saved as a preference for later sessions.

## 6.23.3 Shortcuts

The shortcuts view displays all available server, scene tree and property actions and the currently assigned shortcuts. All shortcut configurations are saved to the database into the user table for personalization.


**Figure 55:** User interface shortcut settings

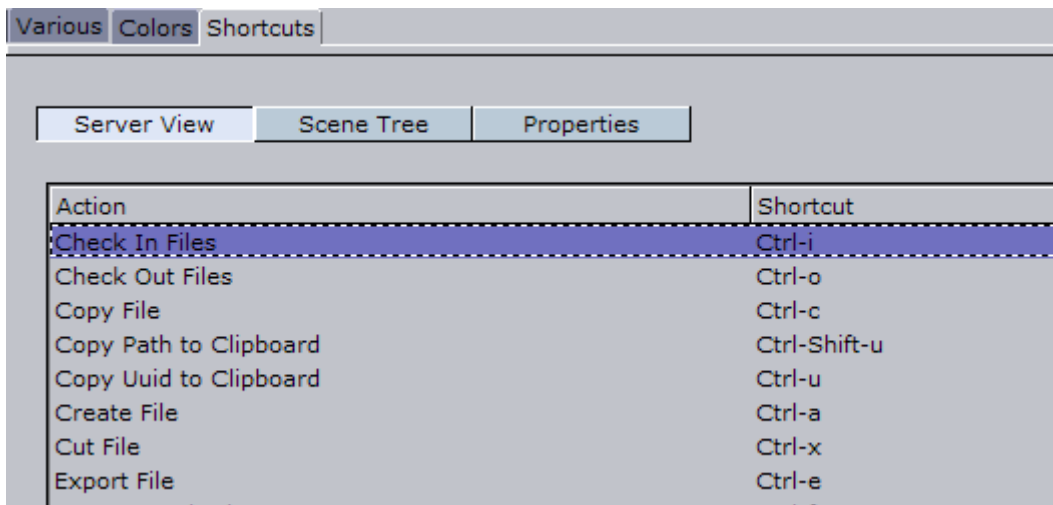

- **Server, Scene Tree and Properties:** Displays all server actions and their currently assigned shortcuts.
- **Shortcuts:** When clicked, displays a list of available shortcut key-combinations that can be assigned to the selected action.
- **Reset All:** Resets all shortcuts to the the default setup.

## 6.24 Video Board

**Figure 56:** Video Board

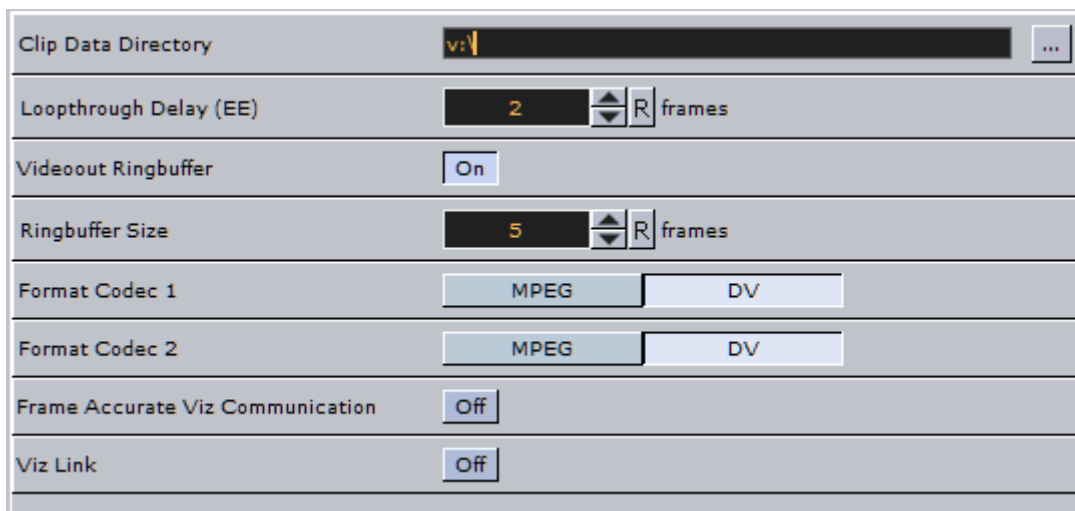

This section is used to configure video input, output and clip playback related settings.

- **Clip Data Directory:** Sets the clip directory for clip transfer in a Viz Link environment. Default directory is V:\ drive.

**Note:** The directory has to match the directory set when installing the Ardftp FTP service for video transfer from Viz Video Hub.

- **Loophrough Delay (EE):** Sets delay for live video input in DVE mode. This setting is only used for Targa boards. This setting applies for all input channels. For Matrox, see (Matrox0.VideoIn1.VideoDelayDVE) ... Configuration File.
- **Videoout Ringbuffer:** Sets the render buffer for video output. Helps to prevent frame drops on the video output during execution of commands or loading of objects. When enabled the engine will render a number of graphic frames in advance and provide it to the video hardware. The number of frames rendered forwardly is defined by the Ringbuffer Size. Large buffer sizes will delay the output and increase the input to output delay for video textures.
- **Ringbuffer size:** Sets the size of the Ringbuffer in frames.
- **Audio Delay Input1 (EE):** Delay can be adjusted to synchronize the inputs at the output. This only affects Targa boards.
  - For Matrox, see the configuration file and SECTION MATROX\_CONFIG's *Matrox0.AudioIn1.AudioDelayDVE* setting.
- **Audio Delay Input2 (EE):** Delay can be adjusted to synchronize the inputs at the output. This only affects Targa boards.

-----

**Note:** To enable audio mixing on the video board, these two settings must be turned on. Otherwise the audio data from Input 1 to Input 4 are not mixed with the values for the stage and played out.

-----

-----

**Note:** Targa boards do not distinguish between DVE and texture delays.

-----

- **Format Codec 1:** Enables the codec matching the codec of the Targa board. Alternatives are MPEG and DV. This only applies to video clips.
- **Format Codec 2:** Enables the codec matching the codec of the Targa board. Alternatives are MPEG and DV. This only applies to video clips.
- **Enable embedded audio on Input1:** Enables embedded audio for use with video as texture or DVE. Input 1 in the [Video Input](#) section must be enabled in order to use embedded audio output.
- **Enable embedded audio on Input2:** Enables embedded audio for use with video as texture or DVE. Input 2 in the [Video Input](#) section must be enabled in order to use embedded audio output.
- **Frame Accurate Viz Communication:** When enabled, allows for external control that supports special frame accurate command execution. This will enable the user to predict when the command will be executed by introducing a fixed delay.

---

## 6.25 Video Clip

**Figure 57:** Video clip settings



- **Clip Data Directory:** Sets the clip directory for clip transfer in a Viz Link environment. Default directory is D:\ drive.

## 6.26 Video Input

Figure 58: Video input settings

Input 1	Input 2	Clip Channel 1	Clip Channel 2	Input 3	Input 4
SD i	SD i	SD i	SD i	SD i	SD i
HD 720p	HD 720p	HD 720p	HD 720p	HD 720p	HD 720p
HD 1080i	HD 1080i	HD 1080i	HD 1080i	HD 1080i	HD 1080i
inactive	inactive	inactive	inactive	inactive	inactive
w/Alpha		w/Alpha		w/Alpha	

Input channels are enabled in this section. To be able to use a channel – no matter if it is a live input channel or a clip channel – it first has to be enabled.

This dialog not only activates the channel, it also defines the video standard the channel should be configured to. It is possible to mix video standards – for example a Viz Engine configured to play out 1080i50 can have inputs configured to SD. In this dialog Input 1 and Input 2 refer to live input channel 1 and live input channel 2. Clip channels are for video clips. The frequency of the channels will be defined by the configurations in the [Output Format](#) section.


Clip Channel 1 and Clip Channel 2 must be configured to the same video standard.

- **Input w/Alpha:** For the Input this will combine the two (Input 1 and Input 2) channels to one channel carrying fill and key. Meaning the Y (luminance) from Input 2 in YUV will be used as the key signal.
- **Clip w/Alpha:** When enabled the clip file must either contain key information or a key clip must be provided. The key clip must have the string “\_key” appended to the filename. For a clip named *i422\_50M.avi* this would be *i422\_50M\_key.avi*.

**Note:** Video input format may be limited by hardware capabilities on the video board (for example Targa boards only support SD, and Matrox 6000 series boards does not support HD clips).

## 6.27 Video Output


Figure 59: Video Output

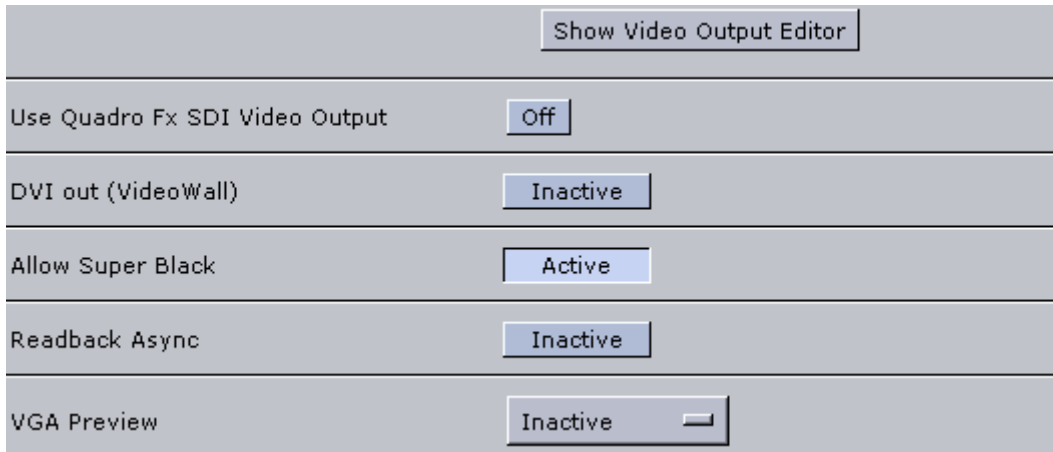

This section is used to configure special settings for video output such as [SPG](#) settings and so on.

- **Show Video Output Editor (ALT+V):** Opens the [Video Output Editor](#).
- **Use Quadro FX 4000 SDI Video Output:** Enables NVIDIA's SDI module to output video. This will shorten the output delay when outputting graphics and video through the video board. However, this requires that audio to be handled externally since NVIDIA's SDI module does not support embedded audio output.
- **DVI Out (Viz Video Wall):** Sets the main output to [DVI](#).
- **VGA Preview:** Sets the default value for the Preview button (see [Control Buttons](#)) when Viz Engine is in On Air mode.
  - When inactive, rendering will only be done for video out signals. This will increase performance as the renderer does not have to render into an editor on screen and into pixel buffer.
  - When active, rendering will be done for both video out signals and on screen; however, this will decrease the performance.
  - Standard-PC versions do not have a video out option; hence, the button is not visible in On Air mode and VGA Preview is always active.

Figure 60: Video Output Editor

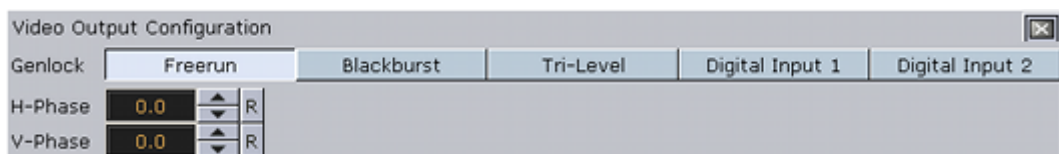

The Video Output Editor defines the synchronization standard and the output signal phases.

- **Freerun:** Locks Viz Engine to a clock signal on the video board.
- **Blackburst and Tri-level:** Locks Viz Engine to a [GenLock](#) signal.
- **Digital Input 1 and 2:** Locks Viz Engine to the signal on Input 1 or 2.
- **H-Phase and V-Phase:** Shifts the output signal with respect to the sync signal.

## See Also

- [Output Format](#)
- [Video Preview](#)

---

## 6.28 Video Preview

**Figure 61:** Video preview


Input 1	Input 2	Clip Channel 1	Clip Channel 2	Input 3	Input 4
SD i	SD i	SD i	SD i	SD i	SD i
HD 720p	HD 720p	HD 720p	HD 720p	HD 720p	HD 720p
HD 1080i	HD 1080i	HD 1080i	HD 1080i	HD 1080i	HD 1080i
inactive	inactive	inactive	inactive	inactive	inactive

This section is used by the VGA (standard-PC) version of Viz Engine. Video Preview in VGA version enables clip playback via scene setup.

---

## 6.29 Viz Artist 2.x

**Figure 62:** Viz Artist 2.x

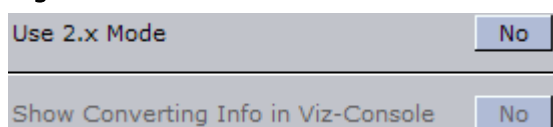

In this section, Viz Artist 3 can be switched to Viz Artist 2 mode for compatibility issues.

In Viz Artist versions prior to 3.0, assets were stored in specific subdirectories (Scene, Object, Material, Font, and Image). As Viz Artist 3 stores assets anywhere in the directory, older control applications may not find these assets. If enabling 2.x mode, the assets will be looked for in the subdirectories, and calls for scenes will be represented by green lines in the console window.

When working in 2.x mode, *Viz\_2x* will automatically be added before the default messaging path. Furthermore, the paths sent by the external control applications will be converted to lower case (as the names of the data will be converted to lower case when importing). So, external control programs must not be re-written when migrating from Viz Artist 2 to 3.

- **Use 2.x mode:** Enables Viz Engine to run in 2.x mode.
- **Show converting Info in Viz-Console:** Enables the calls for scenes to be shown as green text.

-----  
**Note:** It is only recommended to use 2.x mode if new scenes are organized according to the old 2.x data structure.  
-----

## 6.30 Viz License Information

**Figure 63:** Viz License Information

```
Version: 3.3.0.9684
SysID: 00120001A1B0A170F2
key # 8
Expiration Date 1: 27. Mar 2010
Expiration Date 2: 27. Mar 2010
Platform: HDTV (Panasonic, Quadro Fx SDI, Matrox), SDTV (Targa, Q
licensed features:
-----
GUI ..... licensed
Device Control ..... licensed
Render to Disk ..... licensed
Text FX ..... licensed
Real FX ..... licensed
Image FX ..... licensed
Spline FX ..... licensed
Targa 3200 FX ..... licensed
Weather ..... licensed
Audio ..... licensed
Weather Plugins ..... licensed
Shader ..... licensed
Graffiti ..... licensed
Gizmoz ..... licensed
Weather Playout ..... licensed
Geo FX ..... licensed
Vizual Data Tools ..... licensed
RTT Advanced Materials ..... licensed
Action Model ..... licensed
Video preview ..... licensed
Video-in ..... licensed
Clip-in (2 channels) ..... licensed
```

License

In this section, information about the current Viz license is displayed. The section lists the various licensed features, for example the available plug-in packages.

- **License:** Enter a new license key into the License field, and click Save. Restart Viz in order for the new license key to take effect.

### See Also

- [Plugins](#)



---

## 7 Graphic Cards

This chapter describes the NVIDIA graphics cards and drivers supported by Viz. It also provides a procedure on how [To configure NVIDIA driver settings](#).

-----  
**IMPORTANT!** Any other setup than those described is not guaranteed to be supported by Viz and may cause problems during operation.  
-----

**Note:** Vizrt may make changes to specifications and product descriptions at any time, without notice.  
-----

This section contains information on the following topics:

- [Two Graphic Cards](#)
- [Driver Installation and Recommendations](#)
- [Standard PC Recommendations](#)
- [Viz Video Wall Recommendations](#)

---

### 7.1 Two Graphic Cards

A machine with two graphic cards is, with Viz Engine 3.3 and later, able to run two instances of Viz simultaneously. Currently there are two options; Viz Engine dual channel or a Viz Trio OneBox setup.

In a Viz Engine dual channel setup the two instances could be used to run two program channels. For example; SD and HD output, for compositing a stereoscopic output. A dual channel solution will also save rack unit space as all hardware is fitted into one machine.

In a Viz Trio OneBox setup the two instances are used to obtain program and preview output from one single machine where both channels have video.

-----  
**Note:** The limitations to such systems, in general and not limited to Vizrt alone, is memory usage and access, and also lack of power redundancy.  
-----

This section contains information on the following topics:

- [Dual Channel Setup for Synchronous Output](#)
- [Viz Video Wall Distributor](#)
- [To configure a machine with two graphics cards](#)

#### Dual Channel Setup for Synchronous Output

With a dual channel setup, it is easy to create two fill/key pairs for the left and right eye/camera during a stereo production. A special version of the [Viz Video Wall Distributor](#) synchronously distributes one command to the two instances of the Viz Engine. For Viz Engine version 3.3, it includes a built-in locking mechanism that ensures that both engines stay in sync, even if one of them drops

a frame. This feature can be switched on or off by a simple command sent through the distributor.

Hardware requirements:

- HP Z800 machine
- 2 x NVIDIA Quadro FX 3800 or 2x NVIDIA Quadro FX 4800 (GPUs must be identical)
- Matrox X.mio 2 video in- and output card

Software requirements:

- Viz Artist / Viz Engine v3.3

The installer for Viz Engine v3.3 includes an option for dual channel support. Choosing this option generates desktop icons to start the configuration and the Viz Engine for channel 1 as well as for channel2. Note that Viz Artist will only be available for channel 1.

The configurations use one video input per channel and embedded audio on the channel. The table below shows the main differences in the configurations.

**Table 3:** Synchronous output

	Viz Engine 1	Viz Engine 2
Stereo Mode	LEFT_EYE	RIGHT_EYE
Video In A	Video1	Unused
Video In B	Unused	Video 1
Video In C+D	Unused	Unused
Clip A	Clip 1	Clip 1
Clip B	Clip 2	Clip 2
Video Out A	Fill	Unused
Video Out B	Unused	Fill
Video Out C	Key	Unused
Video Out D	Unused	Key
Communication Port	6700	6800

Since this configuration puts an extra load on the Matrox card, it is important to use the available resources with care.

- In the video section of the scene switch off all unused layers
- Let the GPU do the color conversion.

The Matrox card itself is synced through the Viz Engine 1 instance.

It is important that only **one** display is active in the NVIDIA control panel. If you span the desktop across multiple GPUs, the affinity mask has no effect and both engines will render on GPU.

## Viz Video Wall Distributor

The Viz Video Wall distributor listens to port 6100 as if it was a regular Viz Engine. The engines are connected via ports 6700 and 6800 respectively.

During startup the engines are not in sync; hence, you need to send the Viz command `RENDERER SET_VSYNC 1` for them to listen to each other. If one Viz Engine fails, `RENDERER SET_VSYNC 0` should be sent to the other renderer to allow it to run freely.

- `RENDERER*CURRENT_CAMERA*ZERO_PARALLAX_DIST SET` will set the distance of the zero parallax plane to the camera origin.
- `RENDERER*CURRENT_CAMERA*EYE_SEPARATION SET` sets the eye separation of the current camera.

These properties are also available for the individual cameras in all three layers.

## To configure a machine with two graphics cards

1. Install Viz Engine 3.3 or later and choose **Dual Channel** or **Viz Trio One Box** setup.
  - *Viz Trio One Box*: Install Viz Trio 2.9 and Media Sequencer 1.19 and later.
2. From the Viz3 sub folder **ConfigExample/TrioOneBox** or **ConfigExample/DualChannel**, select the example configuration file that suits your desired video output format.
3. Create two copies of the selected configuration file and place them in your Viz3 directory and rename one to **VIZ-YOURHOSTNAME-0-0.cfg** and the other **VIZ-YOURHOSTNAME-1-0.cfg**.
4. Start Viz Config for both instances (channel 1 and channel 2) and enter settings for the Viz Graphic Hub (see [Database](#)) and enable Auto Login.
  - The latter is needed as dual channel engines start without a UI.
  - For Viz Trio it is more a convenience factor, and not needed as such.
5. Start Viz Engine for channel 1 and then Viz Engine for channel 2.
  - Channel 1 signals are available on Matrox OutA (fill) and OutC (key).
  - Channel 2 signals are available on Matrox OutB (fill) and Out D (key).

## See Also

- [To install X.mio 2 in an HP z800 with two graphics cards](#)
- Viz Artist manual on Stereo Settings and Stereoscopy best practices.
- Viz Trio manual on OneBox setup of the output channels.

---

## 7.2 Driver Installation and Recommendations

This section describes how [To configure NVIDIA driver settings](#), and in addition gives an overview of the different card and driver versions that are supported by Viz.

This section contains information on the following topics:

- [Driver Installation](#)
- [Driver Recommendations](#)


## 7.2.1 Driver Installation

This section contains information on the following procedures:

- [To configure NVIDIA driver settings](#)
- [To configure the v-phase settings when synchronizing the card](#)


### To configure NVIDIA driver settings

**Figure 64:** NVIDIA Control Panel, Desktop context menu

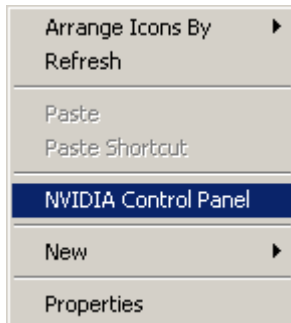


1. Right-click the desktop and select the **NVIDIA Control Panel** option on the appearing context menu

**Figure 65:** Advanced Settings, NVIDIA Control Panel

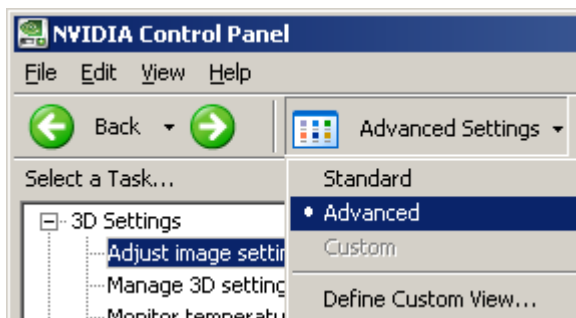

2. Set the NVIDIA Control Panel view option to **Advanced**
3. From the **Select a Task ...** tree view select **Adjust image settings with preview** to display the **Adjust Image Settings with Preview** in the right-hand pane

**Figure 66:** Adjust Image Settings with Preview, NVIDIA Control Panel

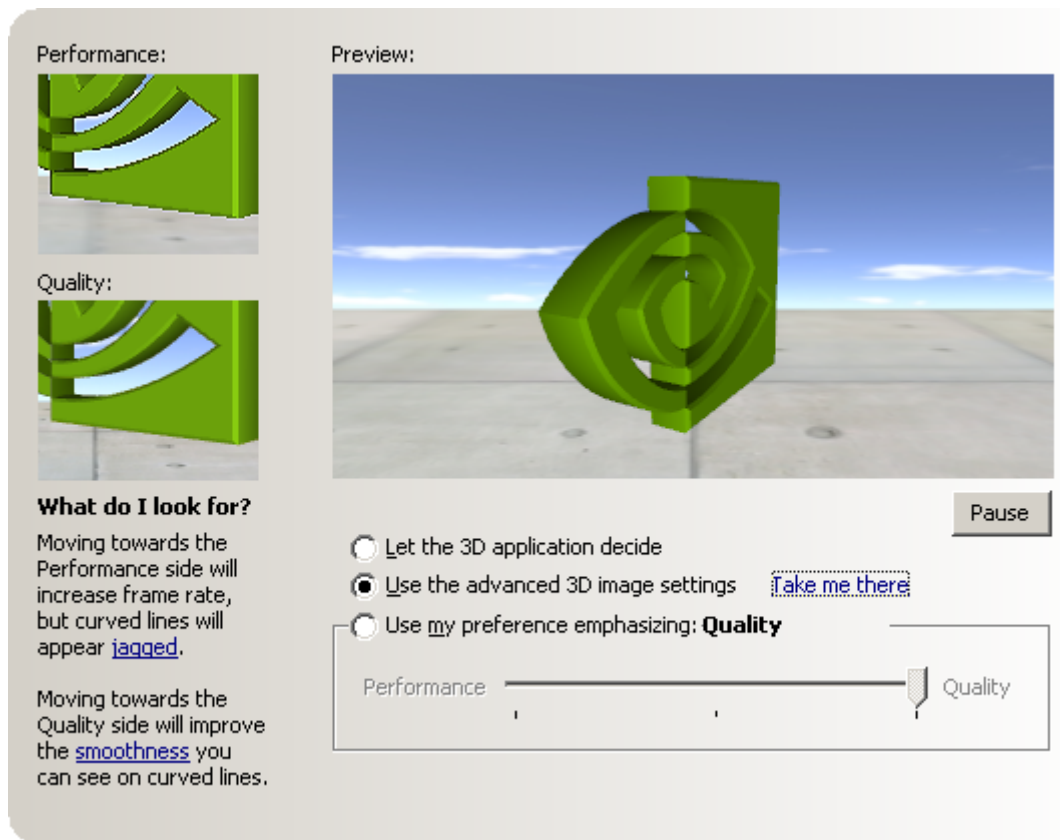

4. Select the **Use the advanced 3D image settings** option and click the **Take me there** link
5. Under **Global Settings** select the global preset option **Base profile**, and set the following parameters:
  - **Anisotropic filtering** – Application controlled
  - **Antialiasing–Gamma correction** – Off
  - **Antialiasing–Mode** – Override any application settings
  - **Antialiasing–Setting** – 4x (4xMS)
  - **Antialiasing–Transparency** – Off
  - **Vertical Sync** – Force off (see below for more)

Regarding *Vertical Sync*:

- **Use the 3D application setting** for Viz installations (running in Standard PC (VGA) mode) and for Viz Video Wall setups where video is in use.
- **Force Off** is used for Viz installations where video is in use (unless used for video walls).
- **Unified Back Buffer** must be disabled (Off) in any case. Note that this depends on the driver version used. Most recent drivers from NVIDIA already have this setting disabled.

For Quadro FX 4000 SDI, FX 4500 SDI, and FX 5500 SDI you may need to set `use_old_nvsdk` to 1 in the Viz configuration file if you encounter stability issues on unsupported systems.

### To configure the v-phase settings when synchronizing the card

1. Start Viz Config, or open the configuration from Viz Artist (Config button in the upper right corner)
2. Select the [Video Output](#) section
3. When using an NVIDIA SDI output option and synchronize on blackburst, use the following v-phase settings:
  - PAL: 606
  - NTSC: 509
  - 720p50: 743
  - 720p60: *not supported*
  - 720p60M: 736
  - 1080i50: 1113
  - 1080i60M: 1113
4. When synchronizing with SDI, leave the v-phase to 0

## 7.2.2 Driver Recommendations

NVIDIA driver 259.12 is recommended for most graphics cards on workstations.

For standard PC versions on laptops the NVIDIA notebook driver 176.87 is recommended.

The NVIDIA driver 91.36 is recommended for video wall setups with G-Sync boards and graphics cards FX5500, FX4500 or earlier to enable a stable clock on all machines. For later graphics cards the driver 259.12 is recommended.

### See Also

- [NVIDIA Quadro FX1400](#)
- [NVIDIA Quadro FX1500](#)
- [NVIDIA Quadro FX1700](#)
- [NVIDIA Quadro FX3400](#)
- [NVIDIA Quadro FX3700](#)
- [NVIDIA Quadro FX3800](#)
- [NVIDIA Quadro FX3800 SDI](#)
- [NVIDIA Quadro 4000](#)
- [NVIDIA Quadro FX4000](#)
- [NVIDIA Quadro FX4000 SDI](#)
- [NVIDIA Quadro FX4500](#)
- [NVIDIA Quadro FX4500 SDI](#)
- [NVIDIA Quadro FX4600](#)
- [NVIDIA Quadro FX4600 SDI](#)
- [NVIDIA Quadro FX4800](#)
- [NVIDIA Quadro FX4800 SDI](#)
- [NVIDIA Quadro 5000](#)
- [NVIDIA Quadro FX5500](#)
- [NVIDIA Quadro FX5500 SDI](#)
- [NVIDIA Quadro FX5600](#)
- [NVIDIA Quadro FX5600 SDI](#)

- [NVIDIA Quadro FX5800](#)
- [NVIDIA Quadro 6000](#)

### 7.2.3 NVIDIA Quadro FX1400

Typically used with Viz Trio or Viz Weather clients on HP xw4200 and xw4300.

- **Interface** – PCIe
- **Operating System** – Microsoft Windows XP SP2

#### Configuration History

- **Viz 3.x** – 3.2.2 and later
  - **Driver** – 259.12
- **Viz 3.x** – 3.1.0–3525
  - **Driver** – 81.67
- **Viz 3.x** – Driver 71.84 is not suitable for Viz 3.x because of render problems. Use version 62.77. Disable anisotropic filtering, and set antialiasing to x4 (NVIDIA configuration dialogs). There are also known issues regarding shader plug-ins, like wrong colors or bad pixels.

#### See Also

- [To configure NVIDIA driver settings](#)
- Release notes for recommended and supported hardware versions

### 7.2.4 NVIDIA Quadro FX1500

Typically used with Viz Trio or Viz Weather clients on HP xw4400.

- **Interface** – PCIe
- **Operating System** – Microsoft Windows XP SP2

#### Configuration History

- **Viz 3.x** – 3.2.2 and later
  - **Driver** – 259.12
- **Viz 3.x** – 3.1.0–3525 and later
  - **Driver** – 162.62

#### See Also

- [To configure NVIDIA driver settings](#)
- Release notes for recommended and supported hardware versions

### 7.2.5 NVIDIA Quadro FX1700

Typically used with Viz Trio, Viz Content Pilot or Viz Weather clients on HP xw4600.

- **Interface** – PCIe
- **Operating System** – Microsoft Windows XP SP2

### Configuration History

- **Viz 3.x** – 3.2.2 and later
  - **Driver** – 259.12
- **Viz 3.x** – 3.1.0–3525 and later
  - **Driver** – 162.62

### See Also

- [To configure NVIDIA driver settings](#)
- Release notes for recommended and supported hardware versions

## 7.2.6 NVIDIA Quadro FX1 800

Typically used with Viz Trio, Viz Content Pilot or Viz Weather clients on HP Z400.

- **Interface** – PCIe
- **Operating System** – Microsoft Windows XP SP3

### Configuration History

- **Viz 3.x** – 3.2.2 and later
  - **Driver** – 259.12

### See Also

- [To configure NVIDIA driver settings](#)
- Release notes for recommended and supported hardware versions

## 7.2.7 NVIDIA Quadro FX3400

Typically used with *older* Viz systems based on HP xw8200.

- **Interface** – PCIe
- **Operating System** – Microsoft Windows XP SP2

### Configuration History

- **Viz 3.x** – 3.2.2 and later
  - **Driver** – 259.12
- **Viz 3.x** – 3.1.0–3525
  - **Driver** – 81.67
- **Viz 3.x** – Driver 71.84 is not suitable for Viz 3.x because of render problems. Use version 62.77. Disable anisotropic filtering, and set antialiasing to x4 (NVIDIA configuration dialogs). There are also known issues regarding shader plug-ins, like wrong colors or bad pixels.

### See Also

- [To configure NVIDIA driver settings](#)
- Release notes for recommended and supported hardware versions



## 7.2.8 NVIDIA Quadro FX3700

Typically used with HD Viz systems based on HP xw8600.

- **Interface** – PCIe
- **Operating System** – Microsoft Windows XP SP2

### Configuration History

- **Viz 3.x** – 3.2.2 and later
  - **Driver** – 259.12

### See Also

- [To configure NVIDIA driver settings](#)
- Release notes for recommended and supported hardware versions

## 7.2.9 NVIDIA Quadro FX3800

Typically used with HD Viz systems based on HP Z800.

- **Interface** – PCIe
- **Operating System** – Microsoft Windows XP SP3

### Configuration History

- **Viz 3.x** – 3.2.2 and later
  - **Driver** – 259.12

### See Also

- [To configure NVIDIA driver settings](#)
- Release notes for recommended and supported hardware versions

## 7.2.10 NVIDIA Quadro FX3800 SDI

Typically used with HD Viz systems based on HP Z800.

- **Interface** – PCIe
- **Operating System** – Microsoft Windows XP SP3

### Configuration History

- **Viz 3.x** – 3.2.2 and later
  - **Driver** – 259.12

### See Also

- [To configure NVIDIA driver settings](#)
- Release notes for recommended and supported hardware versions

## 7.2.11 NVIDIA Quadro 4000

Typically used with HD Viz systems based on HP Z800.

- **Interface** – PCIe
- **Operating System** – Microsoft Windows XP SP3

### Configuration History

- **Viz 3.x** – 3.2.2 and later
  - **Driver** – 259.12

### See Also

- [To configure NVIDIA driver settings](#)
- Release notes for recommended and supported hardware versions

## 7.2.12 NVIDIA Quadro FX4000

Typically used with *older* Viz systems based on IBM Z-Pro 6221.

- **Interface** – AGPx8
- **Operating System** – Microsoft Windows 2000 Professional SP4

### Configuration History

- **Viz 3.x** – 3.2.2 and later
  - **Driver** – 259.12
- **Viz 3.x** – 3.1.0–3525 and later
  - **Driver** – 83.62
- **Viz 3.x** – Driver 71.84 is not suitable for Viz 3.x because of render problems. Use version 62.77. Disable anisotropic filtering, and set antialiasing to x4 (NVIDIA configuration dialogs). There are also known issues regarding shader plug-ins, like wrong colors or bad pixels.

### See Also

- [To configure NVIDIA driver settings](#)
- Release notes for recommended and supported hardware versions

## 7.2.13 NVIDIA Quadro FX4000 SDI

Typically used with *older* HD Viz systems based on IBM Z-Pro 6221.

- **Interface** – AGPx8
- **Operating System** – Microsoft Windows 2000 Professional SP4 and XP SP2

### Configuration History

- **Viz 3.x** – 3.2.2 and later
  - **Driver** – 259.12
  - **Driver** – 91.36 when used with Viz Video Wall (SDI only).

---

**CAUTION!** Application crashes or blue screens with NVidia Quadro FX 4000 SDI, FX 4500 SDI, or FX 5500 SDI in conjunction with a later NVidia driver than 162.62 due to a driver bug. Install NVidia driver 162.62 for these cards, or use driver 259.12 and set `use_old_nv sdk` to 1 in the configuration file.

---

- **Viz 3.x** – 3.1.0–3525 and later
  - **Driver** – 83.62

- **Viz 3.x** – 71.84 is not suitable for Viz 3.x because of render problems. Use version 62.77. Disable anisotropic filtering, disable antialiasing (NVIDIA configuration dialogs).

#### See Also

- [To configure NVIDIA driver settings](#)
- Release notes for recommended and supported hardware versions

### 7.2.14 NVIDIA Quadro FX4500

Typically used with Viz systems based on HP xw8200, xw8400 or IBM Z-Pro 6223.

- **Interface** – PCIe
- **Operating System** – Microsoft Windows XP SP2

#### Configuration History

- **Viz 3.x** – 3.2.2 and later
  - **Driver** – 259.12
- **Viz 3.x** – 3.1.0–3525
  - **Driver** – 83.62
- **Viz 3.x** – Driver 71.84 is not suitable for Viz 3.x because of render problems. Use version 62.77. Disable anisotropic filtering, and set antialiasing to x4 (NVIDIA configuration dialogs). There are also known issues regarding shader plug-ins, like wrong colors or bad pixels.

#### See Also

- [To configure NVIDIA driver settings](#)
- Release notes for recommended and supported hardware versions

### 7.2.15 NVIDIA Quadro FX4500 SDI

Typically used with HD Viz systems based on HP xw8200, xw8400 or IBM Z-Pro 6223.

- **Interface** – PCIe
- **Operating System** – Microsoft Windows XP SP2

#### Configuration History

- **Viz 3.x** – 3.2.2 and later
  - **Driver** – 259.12
  - **Driver** – 91.36 when used with Viz Video Wall (SDI only).

---

**CAUTION!** Application crashes or blue screens with NVidia Quadro FX 4000 SDI, FX 4500 SDI, or FX 5500 SDI in conjunction with a later NVidia driver than 162.62 due to a driver bug. Install NVidia driver 162.62 for these cards, or use driver 259.12 and set `use_old_nvsdk` to 1 in the configuration file.

---

- **Viz 3.x** – 3.1.0–3525 and later
  - **Driver** – 83.62

- **Viz 3.x** – Driver 71.84 is not suitable for Viz 3.x because of render problems. Use version 62.77. Disable anisotropic filtering, disable antialiasing (NVIDIA configuration dialogs).

#### See Also

- [To configure NVIDIA driver settings](#)
- Release notes for recommended and supported hardware versions

### 7.2.16 NVIDIA Quadro FX4600

Typically used with HD Viz systems based on HP xw8400 or IBM Z-Pro 9228.

- **Interface** – PCIe
- **Operating System** – Microsoft Windows XP SP2

#### Configuration History

- **Viz 3.x** – 3.2.2 and later
  - **Driver** – 259.12
- **Viz 3.x** – 3.1.0–3525 and later
  - **Driver** – 162.62

#### See Also

- [To configure NVIDIA driver settings](#)
- Release notes for recommended and supported hardware versions

### 7.2.17 NVIDIA Quadro FX4600 SDI

Typically used with HD Viz systems based on HP xw8400 and xw8600.

- **Interface** – PCIe
- **Operating System** – Microsoft Windows XP SP2

#### Configuration History

- **Viz 3.x** – 3.2.2 and later
  - **Driver** – 259.12

#### See Also

- [To configure NVIDIA driver settings](#)
- Release notes for recommended and supported hardware versions

### 7.2.18 NVIDIA Quadro FX4800

Typically used with HD Viz systems based on HP Z800.

- **Interface** – PCIe
- **Operating System** – Microsoft Windows XP SP3

#### Configuration History

- **Viz 3.x** – 3.2.2 and later

- **Driver** – 259.12

#### See Also

- [To configure NVIDIA driver settings](#)
- Release notes for recommended and supported hardware versions

### 7.2.19 NVIDIA Quadro FX4800 SDI

Typically used with HD Viz systems based on HP Z800.

- **Interface** – PCIe
- **Operating System** – Microsoft Windows XP SP3

#### Configuration History

- **Viz 3.x** – 3.2.2 and later
  - **Driver** – 259.12

#### See Also

- [To configure NVIDIA driver settings](#)
- Release notes for recommended and supported hardware versions

### 7.2.20 NVIDIA Quadro 5000

Typically used with HD Viz systems based on HP Z800.

- **Interface** – PCIe
- **Operating System** – Microsoft Windows XP SP3

#### Configuration History

- **Viz 3.x** – 3.2.2 and later
  - **Driver** – 259.12

#### See Also

- [To configure NVIDIA driver settings](#)
- Release notes for recommended and supported hardware versions

### 7.2.21 NVIDIA Quadro FX5500

Typically used with HD Viz systems based on HP xw8400 or IBM Z-Pro 9228.

- **Interface** – PCIe
- **Operating System** – Microsoft Windows XP SP2

#### Configuration History

- **Viz 3.x** – 3.2.2 and later
  - **Driver** – 259.12
- **Viz 3.x** – 3.1.0–3525
  - **Driver** – 162.62

#### See Also

- [To configure NVIDIA driver settings](#)
- Release notes for recommended and supported hardware versions

### 7.2.22 NVIDIA Quadro FX5500 SDI

Typically used with HD Viz systems based on HP xw8400 or IBM Z-Pro 9228.

- **Interface** – PCIe
- **Operating System** – Microsoft Windows XP SP2

#### Configuration History

- **Viz 3.x** – 3.2.2 and later
  - **Driver** – 259.12
  - **Driver** – 91.36 when used with Viz Video Wall (SDI only).

---

**CAUTION!** Application crashes or blue screens with NVidia Quadro FX 4000 SDI, FX 4500 SDI, or FX 5500 SDI in conjunction with a later NVidia driver than 162.62 due to a driver bug. Install NVidia driver 162.62 for these cards, or use driver 259.12 and set `use_old_nvsdk` to 1 in the configuration file.

---

#### See Also

- [To configure NVIDIA driver settings](#)
- Release notes for recommended and supported hardware versions

### 7.2.23 NVIDIA Quadro FX5600

Typically used with HD Viz systems based on HP xw8400 and xw8600.

- **Interface** – PCIe
- **Operating System** – Microsoft Windows XP SP2

#### Configuration History

- **Viz 3.x** – 3.2.2 and later
  - **Driver** – 259.12
- **Viz 3.x** – 3.1.0–3525 and later
  - **Driver** – 162.62

#### See Also

- [To configure NVIDIA driver settings](#)
- Release notes for recommended and supported hardware versions

### 7.2.24 NVIDIA Quadro FX5600 SDI

Typically used with HD Viz systems based on HP xw8400 and xw8600.

- **Interface** – PCIe
- **Operating System** – Microsoft Windows XP SP2

### Configuration History

- **Viz 3.x** – 3.2.2 and later
- **Driver** – 259.12

### See Also

- [To configure NVIDIA driver settings](#)
- Release notes for recommended and supported hardware versions

## 7.2.25 NVIDIA Quadro FX5800

Typically used with HD Viz systems based on HP Z800.

- **Interface** – PCIe
- **Operating System** – Microsoft Windows XP SP3

### Configuration History

- **Viz 3.x** – 3.2.2 and later
- **Driver** – 259.12

### See Also

- [To configure NVIDIA driver settings](#)
- Release notes for recommended and supported hardware versions

## 7.2.26 NVIDIA Quadro 6000

Typically used with HD Viz systems based on HP Z800.

- **Interface** – PCIe
- **Operating System** – Microsoft Windows XP SP3

### Configuration History

- **Viz 3.x** – 3.2.2 and later
- **Driver** – 259.12

### See Also

- [To configure NVIDIA driver settings](#)
- Release notes for recommended and supported hardware versions

---

## 7.3 Standard PC Recommendations

When installing Standard PC/VGA versions of Viz 3.2.2 or later on laptops, use NVIDIA driver version 176.87.

---

## 7.4 Viz Video Wall Recommendations

In a Viz Video Wall setup NVIDIA's G-Sync boards (genlock) are used to synchronize the graphics cards of all engines for the video wall with the house clock.

The NVIDIA driver 91.36 is therefore recommended for Viz Video Wall setups with G-sync boards and graphics cards FX5500, FX4500 and earlier to enable a stable clock on all machines. For later graphics cards the driver 191.87 is recommended.



---

## 8 Video Cards

This section describes the video cards supported by Viz 3.x. Some cards are considered legacy cards with the latest version of Viz 3.x, and are consequently moved to the [Legacy Cards](#) section.

This section contains information on the following topics:

- [BlueFish444 SD Lite Pro Express](#)
- [DVS Centaurus II](#)
- [Matrox X.mio 1 and X.mio 2](#)
- [Matrox DSX LE2/CG](#)

---

### 8.1 BlueFish444 SD Lite Pro Express

Figure 67: BlueFish444 SD Lite Pro Express



Viz 3 currently support two types of BlueFish444 cards in addition to the SD Lite Pro Express; The two older cards [BlueFish444 Iridium|SD](#) and the [Digital Voodoo DeepBlue LT](#) card.

BlueFish444 SD Lite Pro Express is the most recent BlueFish444 card supported by Vizrt, providing Fill, Key and [GenLock](#) connectors, and is the successor of the [BlueFish444 Iridium|SD](#) and the [Digital Voodoo DeepBlue LT](#).


The card is mostly used with Viz Trio–NV which basically is a system with the ability to run a Viz Trio client with local preview and video output on a single machine; hence, there is no video input or video playback support as with the [Matrox X.mio 1 and X.mio 2](#). The local preview can render a different scene than the one being output on video. The card is typically seen on HP xw4600.

This section contains information on the following topics:

- [Connectors](#)
- [Driver Installation](#)

## 8.1.1 Connectors

**Figure 68:** BNC Connectors, BlueFish444 SD Lite Pro Express

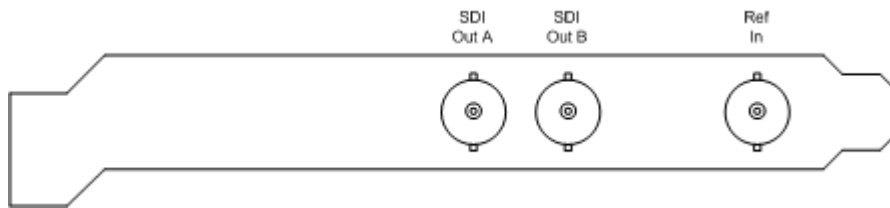

The **BNC** connectors from left to right are:

- **SDI Out A (Fill):** SDI 4:2:2/4:4:4/Video
- **SDI Out B (Key):** SDI 4:2:2/4:4:4/Video
- **Ref In:** Analog **GenLock** input

## 8.1.2 Driver Installation

Use the driver version available on Vizrt's FTP server in order to ensure proper functionality and ring buffer support.

- **Viz 3.x:** 3.2.7 and later
  - **Driver:** Bluefish444 v5.9.0.25
- **Viz 3.x:** 3.2.2 and later
  - **Driver:** Bluefish444 v5.7.6

---

**Note:** Since Viz Engine 3.2.7 and 3.3.0 the driver Bluefish444 v5.9.0.25 is required for all Digital Voodoo / Bluefish cards, also for older versions.

---

---

## 8.2 DVS Centaurus II

Figure 69: DVS Centaurus II



This section contains a description of the Digital Video Systems (DVS) Centaurus II video card.

The DVS is mainly used with Viz Virtual Set and Viz Arena, and is Vizrt's successor of Digital Voodoo's Red Devil card. The DVS is able to output both HD and SD unlike the Red Devil card which can only output SD. The DVS is also typically used with the HP z800 machines.

This section contains information on the following topics:

- [Connectors](#)
- [Supported Codecs](#)
- [Video Card Installation](#)
- [Driver Installation](#)
- [Licensing](#)

### 8.2.1 Connectors


This section describes the main video card, the SDI/RS-422 extension card and how [To connect the DVS Centaurus II and SDI/RS-422 extension card](#).

This section contains information on the following topics:

- [Main Card Connectors](#)
- [SDI and RS-422 Extension Card Connectors](#)
- [To install the DVS Centaurus in an HP z800](#)

## Main Card Connectors

Figure 70: Layout and Connectors, DVS Centaurus II

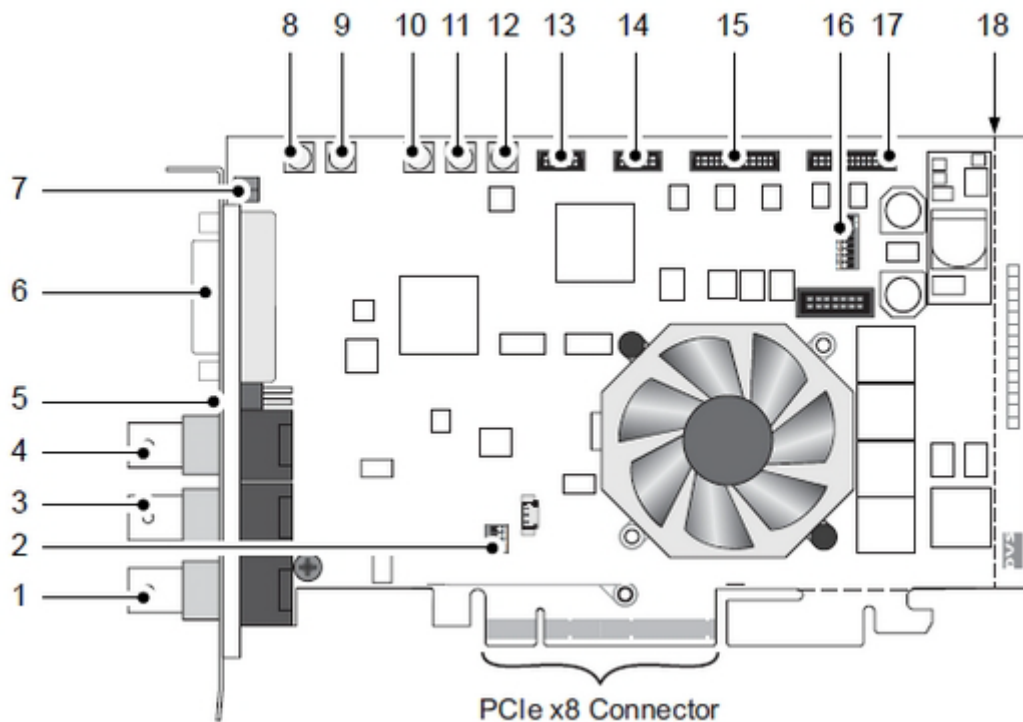

1. **Ref. In:** **BNC** connector for the reference input. May be Bi-/Tri-Level sync.
2. **DIP Switch for PCI:** **PCI-X** variant only: DIP switch to set up the **PCI** video card interface, that is its clock frequency; This switch is not available on the **PCIe** version of the card used by Vizrt.
3. **(HD) SDI OUT A:** **BNC** connector for a video output at port A (serial digital interface); usually used for an output of the first video channel in single-link (**YUV**) or the first stream of **YUVA** or **RGBA** in dual-link mode.
4. **(HD) SDI IN A:** **BNC** connector for a video input at port A (serial digital interface); usually used for an input of the first video channel in single-link (**YUV**) or the first stream of **YUVA** or **RGBA** in dual-link mode.
5. **Ref. Term:** Termination switch for the reference input; switches off the termination of the **GenLock** signal manually, for example if the Centaurus II card is not the last link in a **GenLock** connection chain.
6. **DVI OUT:** **DVI** connector for an output of analogue and digital video signals.
7. **LEDs:** Two status LEDs (**Red/Green**) indicating the presence of correct video and sync signals (see also [Description of the LEDs on the video card](#)).
8. **SD SDI IN1:** **MCX** connector for an input of digital SD video signals (serial digital interface)
9. **(HD) SDI IN B:** **MCX** connector for a video input at port B (serial digital interface); usually used for an input of the second video channel in single-link (**YUV**) or the second stream of **YUVA** or **RGBA** in dual-link mode.
10. **(HD) SDI OUT B:** **MCX** connector for a video output at port B (serial digital interface); usually used for an output of the second video channel in single-link (**YUV**) or the second stream of **YUVA** or **RGBA** in dual-link mode.
11. **SD SDI OUT1:** **MCX** connector for an output of digital SD video signals (serial digital interface)-

12. **CVBS OUT:** MCX connector for a composite video burst signal, either analogue output of SD video or used for synchronization purposes .
13. **GPI:** Flat cable connector for the general purpose interface.
14. **RS-422:** Flat cable connector for an in- and output of RS-422 signals
15. **AUDIO 1-8/LTC:** Flat cable connector for the digital audio channels 1 to 8 and LTC.

**Figure 71:** DIP switch



16. **DIP Switch for Flash Controller:** This switch controls the operation of the on-board Flash controller; it defines the version set of the map file that will be loaded at startup. The image above depicts the default setting of the DIP switch for the Flash controller; please observe the orientation of the switch on the card.
17. **Audio 9-16:** Flat cable connector for the digital audio channels 9 to 16.
18. **Breaking line:** The printed circuit board provides at its bottom (PCIe variant only) and right side extensions void of any electrical parts; these may serve to stabilize the installation of the card in a computer system; when not needed or interfering, you can break them off the circuit board at the breaking line(s); see also dotted lines in figure 1 on the previous page.

**Table 4:** Description of the LEDs on the video card


LED	Function	Mode	Description
Green	Signals the status of the sync input	On	A correct sync signal is detected, that is: <ul style="list-style-type: none"> <li>- Sync mode <i>internal</i> is set</li> <li>- Sync mode <i>external</i> is set and a correct signal is connected</li> <li>- Sync mode <i>analog</i> is set and an analog GenLock signal is connected</li> <li>- Sync mode <i>digital</i> is set and a correct signal is connected</li> </ul>
		Off	A wrong input signal is detected, i.e.: <ul style="list-style-type: none"> <li>- Sync mode <i>external</i> is set and no SDI input signal.</li> <li>- Sync mode <i>analog</i> is set and no GenLock signal connected.</li> <li>- Sync mode <i>digital</i> is set and no SDI input signal.</li> </ul>

**Table 4:** Description of the LEDs on the video card

LED	Function	Mode	Description
Red	Signals the status of the video raster detection feature	Blinking slowly	No input signal is available
		Blinking fast	A wrong input signal is detected (for example DVS Centaurus II is set to NTSC video mode, but a PAL signal is connected to the active input)
		Off	A correct input signal is detected

### SDI and RS-422 Extension Card Connectors

**Figure 72:** SDI and remote control connections, DVS Centaurus II

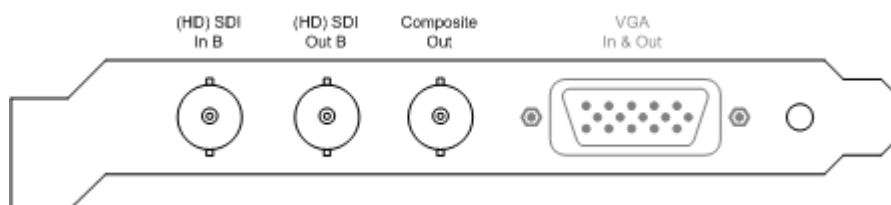

The SDI and RS-422 panel is included in the standard configuration of DVS Centaurus II. It provides the connectors for the second link of the dual-link connections. Additionally a CVBS output is installed on this panel that provides a composite video signal showing the fill signal generated by Viz Engine.

The RS-422 connector available on the panel is a DB-15 (HD) connector.


**Note:** This connector does not provide any additional functionality in regards to Viz Engine and should be ignored. The RS-422 port is not accessible to the operating system and can therefore not be used to transceive any kind of data by third-party applications.

- **(HD) SDI In B:** BNC connector for a video input at port B (serial digital interface); usually used for an input of the second video channel in single-link (YUV) or the second stream of YUVA or RGBA in dual-link mode.
- **(HD) SDI Out B:** BNC connector for a video output at port B (serial digital interface); usually used for an output of the second video channel in single-link (YUV) or the second stream of YUVA or RGBA in dual-link mode.
- **CVBS Out:** BNC connector for a composite video burst signal, either analogue output of SD video or used for synchronization purposes. Provides the fill output of Viz engine as an analogue signal.
- **RS-422 In & Out:** DB-15 (HD) connector (female), serial RS-422 interface for master/slave control, a breakout cable to two DB-9 connectors is included in the delivery.

**Note:** This RS-422 connector is inactive and not accessible to the OS and can therefore not be used to transceive data.

## To connect the DVS Centaurus II and SDI/RS-422 extension card

**Figure 73:** DVS Centaurus II and the extension card

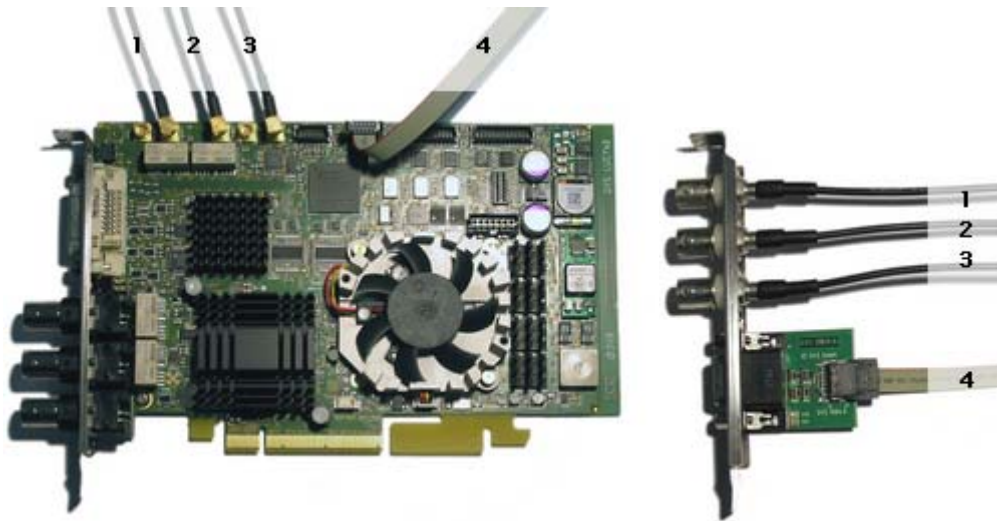

- Connect the separate SDI/RS-422 panel with the DVS Centaurus II main card according to the enumeration shown in the illustration above.

### 8.2.2 Supported Codecs

Currently, the DVS implementation only supports the Microsoft DirectShow Filtergraph framework to render video clips. Therefore it is possible to play for example MPEG files or streams from a server. For more information on how to use video clips in Viz, see the Viz Artist manual and in particular the Mo Viz plug-in.

Basically, it can play everything that can be played out by the Windows Media Player, so it depends on what codecs/DirectShow filters that are installed on the machine.

### 8.2.3 Video Card Installation

Installing a video or an audio-extension card is under normal circumstances not necessary as all components are pre-installed on all new systems with the latest driver versions; however, for maintenance or upgrade issues it is important to know how to do the installation for the different models.


This section contains information on the following topics:

- [To install the DVS Centaurus in an HP z800](#)
- [To install the DVS Centaurus in an HP xw8600](#)



## To install the DVS Centaurus in an HP z800


**Figure 74:** PCI-X, PCI and AGP slots, HP z800

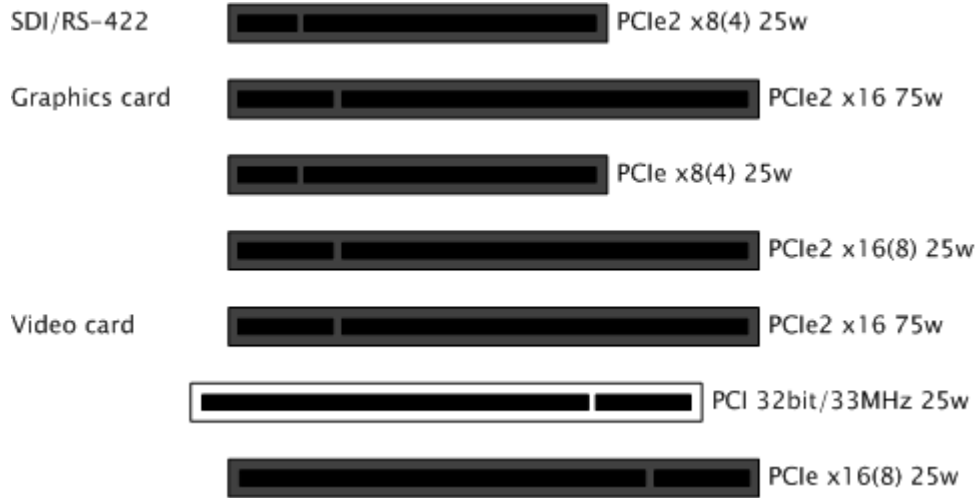

1. Mount the video card in slot number 5 from the top.
2. Mount the separate SDI/RS-422 panel in slot number 1 from the top.
  - Make sure that the cable connections are properly mounted and that it stays clear of any supplemental aerators or the aerator of the graphics device.

## To install the DVS Centaurus in an HP xw8600

**Figure 75:** PCI-X, PCI and AGP slots, HP xw8600

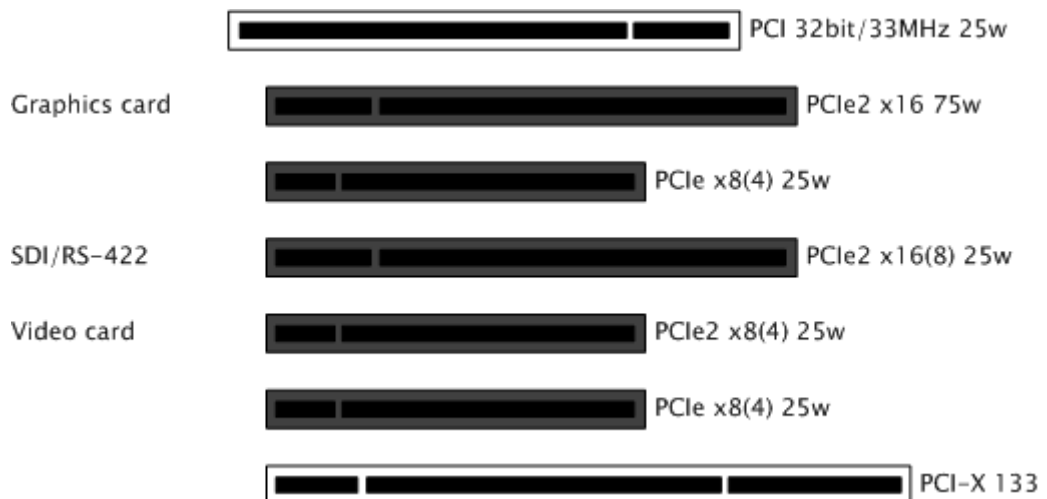

1. Mount the video card in slot number 4 from the top.
2. Mount the separate SDI/RS-422 panel in slot number 1 from the top.
  - Make sure that the cable connections are properly mounted and that it stays clear of any supplemental aerators or the aerator of the graphics device.

### See Also

- [Main Card Connectors](#)



## 8.2.4 Driver Installation

This section describes the driver configuration history, installation of the driver and firmware upgrades.

### See Also

- [DVS Centaurus II driver configuration history](#)
- [To install a DVS Centaurus II driver on a new system](#)
- [To check the current firmware version for DVS Centaurus II](#)
- [To upgrade the firmware for DVS Centaurus II](#)

### DVS Centaurus II driver configuration history

- **Viz 3.x:** Viz 3.3.0 and later
  - **Driver:** 4.0.1.15
- **Viz 3.x:** All versions prior to Viz 3.3.0
  - **Driver:** 3.2.14.12

---

**Note:** Vizrt recommends to use the latest driver versions for all installations; hence, it is recommended to check the Vizrt FTP for later versions.

---

### To install a DVS Centaurus II driver on a new system




1. Start the machine.
2. Ignore (do not cancel) any *Found New Hardware Wizard* dialog boxes
3. Find the latest drivers on [Vizrt's FTP](#).

- ftp://download.vizrt.com/products/Vizrt Drivers/DVS/Centaurus2/
4. Copy the driver folder to a driver folder on the local hard drive.
    - For example: C:\temp


-----  
**IMPORTANT!** Do not delete the driver folder as it is needed for future use such as potential firmware upgrades.  
-----

5. Return to the *Found New Hardware Wizard* dialog box, and select the *No, not this time* option and click *Next*.
6. Select to install from a list or specific location, and click *Next*.

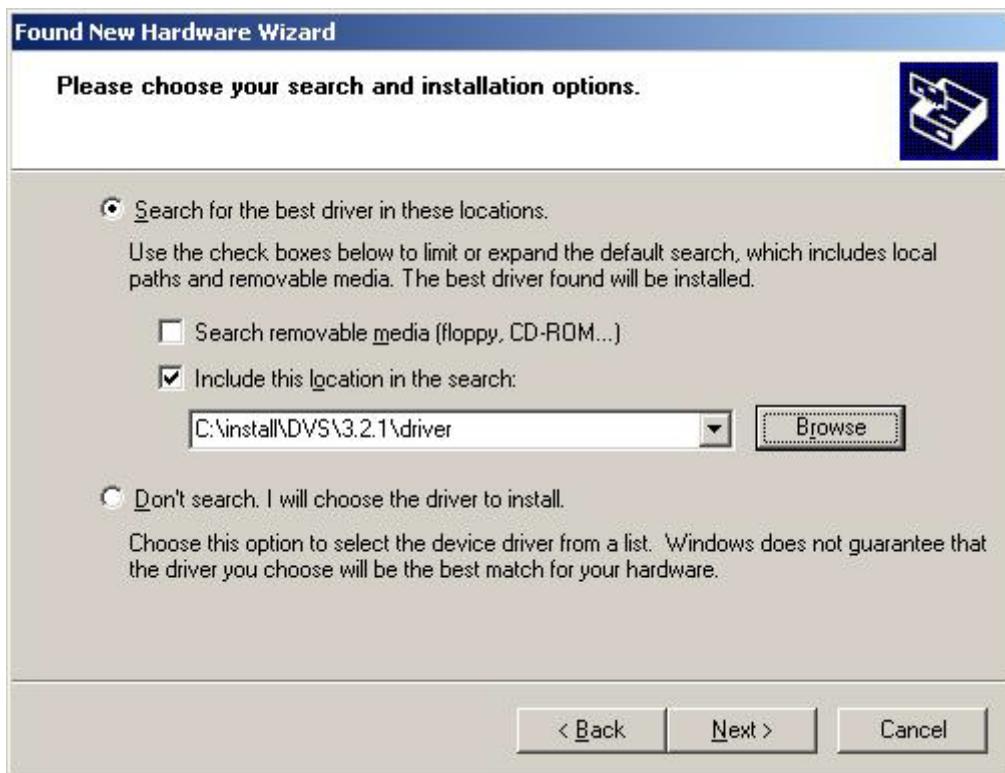


7. Select to search for the best driver and check the Include this location in the search check-box, and click *Browse*.
8. Locate the temporary driver folder, and click *Next*.
9. Ignore the warning about the driver not having passed Windows Logo testing, and click *Continue Anyway* to start the driver installation.
10. Once the installation is complete, click *Finish* to close the *Found New Hardware Wizard* dialog box.

## To check the current firmware version for DVS Centaurus II

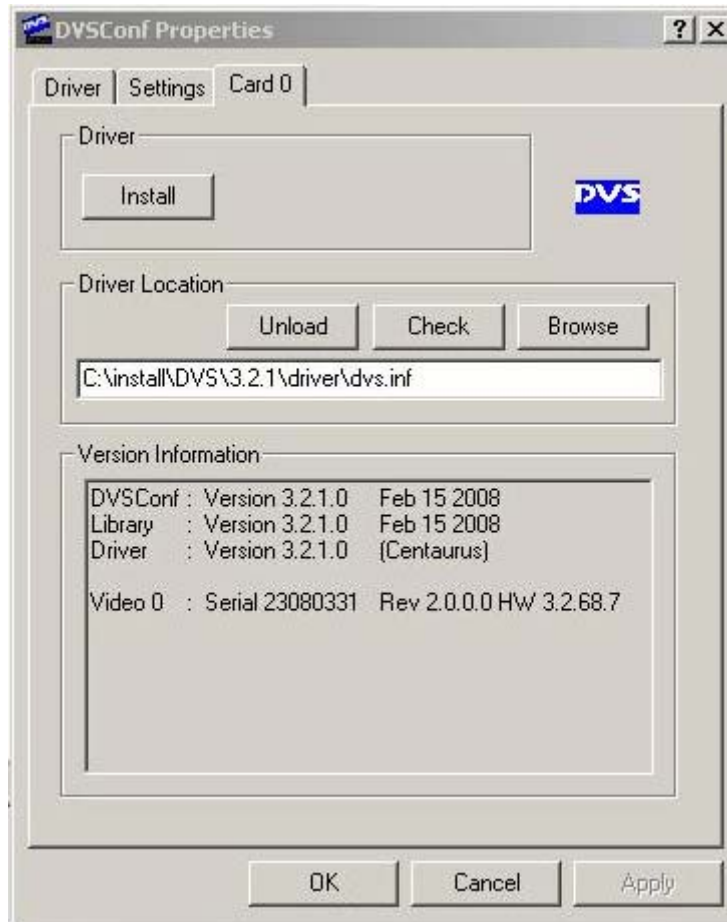

1. Locate and double-click the *dvsconfig.exe* file located in the driver folder downloaded from [Vizrt's FTP](#).
2. Select the *Card 0* tab.
3. In the *Version Information* box see the Video 0 entry and check that the firmware is lower than or equal to 3.2.68.7.
4. Click *OK* to close the DVSConf Properties dialog box.

## To upgrade the firmware for DVS Centaurus II

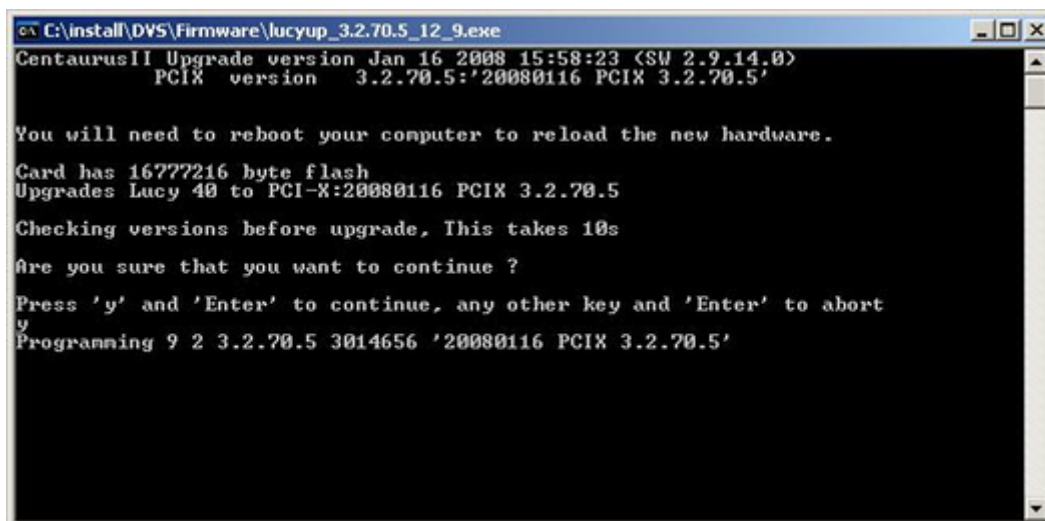

```
C:\install\DVS\Firmware\lucyup_3.2.70.5_12_9.exe
CentaurusII Upgrade version Jan 16 2008 15:58:23 (SW 2.9.14.0)
PCIx version 3.2.70.5:20080116 PCIx 3.2.70.5'

You will need to reboot your computer to reload the new hardware.

Card has 16777216 byte flash
Upgrades Lucy 40 to PCI-X:20080116 PCIx 3.2.70.5

Checking versions before upgrade. This takes 10s

Are you sure that you want to continue ?

Press 'y' and 'Enter' to continue, any other key and 'Enter' to abort
y
Programming 9 2 3.2.70.5 3014656 '20080116 PCIx 3.2.70.5'
```

**IMPORTANT!** Before performing a firmware upgrade it is necessary [To check the current firmware version for DVS Centaurus II](#) and make sure that the version is lower than or equal to 3.2.68.7.

1. Locate and double-click the *lucyup\_3.2.70.5\_12\_9.exe* file located in the *Firmware* folder downloaded from [Vizrt's FTP](#).
  - The program will take a few seconds to start and will prompt the user to continue the upgrade process.
2. Press the *Y* or the *Enter* key to continue the upgrade process.
3. Once the upgrade is complete the program's console window will close itself.
4. Restart the machine for the changes to take effect.

## 8.2.5 Licensing

A few additional steps are required before Viz Engine is able to use the DVS Centaurus II card after a first time installation. First it is necessary [To install a DVS Centaurus II license](#), and then [To validate the DVS Centaurus II license](#).

**Note:** Licensing should not be an issue if the DVS Centaurus II card came preinstalled with the Viz Engine machine.

**Note:** License information is stored in a memory region on the device itself and will not be lost if the card is mounted on another computer.

The license key required during the installation process is shipped together with the device and comes as a single sheet of machine-written paper looking something like the illustration below:

```
lic<xxxxxx>.txt
-----
Date: <xxxxxx>
Licensor: <xxxxxx>
Serialnumber: <xxxxxx>
License does not expire

rawkey 1 = <xxxxxx>
```

```
rawkey 2 = <xxxxxx>
rawkey 3 = <xxxxxx>
```

To check licenses 'svram license show'


For DDR type:  
sv license key1 <yyyyy>

For OEM type:  
svram license key1 <yyyyy>

```
-----
# Product: Centaurus 2 PCIe
# License Key Options:
#
# Not-Expire
#
# Centaurus 2-Dual-Link
# Centaurus 2-Multi-Channel
-----
```

Page 1

### To install a DVS Centaurus II license

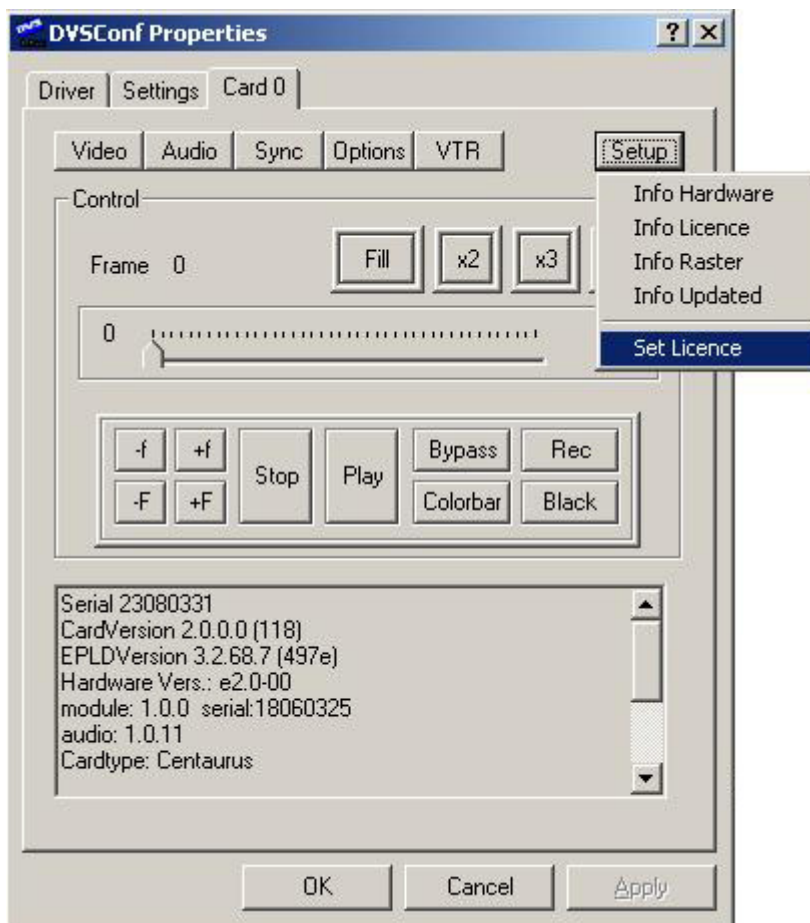

1. Locate and double-click the *dvsconfig.exe* file located in the driver folder downloaded from [Vizrt's FTP](#).
2. Select the *Card 0* tab.


- When selecting the *Card 0* tab for the first time the system will inform that a license needs to be installed for the product.
3. Click *OK* to close the DVSConf Warning dialog box.



4. Click the *Setup* button and select *Set License* from the appearing drop-down menu.
5. Enter the license key in field *Key 1* and click the *Set Key 1* button.

-----  
**Note:** It has been reported that the key might be ignored and that validation fails although it was correctly entered. Re-enter the license string and try again.  
-----

## To validate the DVS Centaurus II license

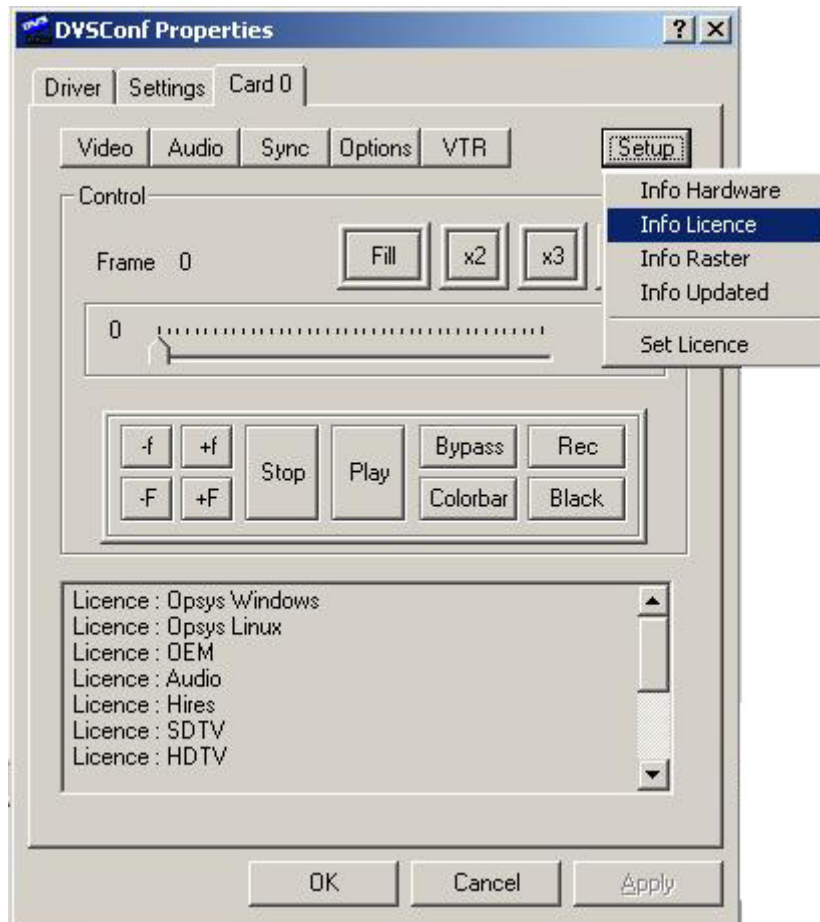

1. Locate and double-click the *dvsconfig.exe* file located in the driver folder downloaded from [Vizrt's FTP](#).
2. Select the *Card 0* tab.
3. Click the *Setup* button and select *Info License* from the appearing drop-down menu.
4. Check the following entries (bottom of the dialog box):
  - License : Opsy Windows
  - License : Opsy Linux
  - License : OEM
  - License : Multidevice
  - License : Audio
  - License : Hires
  - License : SDTV
  - License : HDTV
  - License : 12Bit
  - License : Processing
  - License : Mixer
  - License : ZoomAndPan
  - License : ColorCorrector
  - License : HDTVKeyChannel
  - License : HDTVDualLink

- License : SDTVKeyChannel
  - License : SDTVDualLink
5. Once all licenses are verified, click *OK* to close the program.

---

## 8.3 Matrox X.mio 1 and X.mio 2

**Figure 76:** Matrox X.mio 2 card



The Matrox X.mio cards are used as Vizrt's [HD](#) and [SD](#) multi-channel video- and audio [I/O](#) solution, replacing the Pinnacle Targa 3200.

See also the following topics:

- [Connectors](#)
- [Supported Codecs](#)
- [Video Card Installation](#)
- [Driver Installation](#)
- [Watchdog](#)
- [Licensing](#)

**See Also**

- [Matrox DSX LE2/CG](#)

### 8.3.1 Connectors

The connectors for X.mio 1 are:

- 133 MHz [PCI-X](#) card compliant to PCI-X standards 1.0b and 2.0
- x2 [SDI](#) Video Inputs in [SD](#) and [HD](#)
- x4 [SDI](#) Video Outputs in [SD](#) and [HD](#)
- x8 In / x16 Out, balanced [XLR AES/EBU](#) audio
- x16 Embedded Audio [I/O](#) Channels per [SDI](#) Stream

The connectors for X.mio 2 are:

- [PCIe](#) card compliant to PCIe 2.0 in x8 or x16 slot
- x2 or x4 [SDI](#) Video Inputs in [SD](#) and [HD](#)
- x4 [SDI](#) Video Outputs in [SD](#) and [HD](#)
- x16 In / x32 Out, unbalanced [AES/EBU](#) audio



Because of the large number of I/O connections the card is equipped with [Sub-D](#) connectors. A breakout-cable translating the Sub-D connectors to regular connectors/plugs is included for every machine.

This section contains information on the following topics:

- [Breakout Box](#)
- [Cable Wiring](#)
- [Audio Configuration](#)
- [Audio-extension Card](#)

### Breakout Box

**Figure 77:** X.mio 1 breakout box



**Figure 78:** X.mio 2 breakout box



The breakout box is often used for Viz Engine solutions that need to be rewired in regular intervals. The 1U [Rack unit](#) chassis is designed to fit into a standard 19" rack.


-----  
**Note:** The parts and tools required to mount the box into a rack are not included.  
-----

**Figure 79:** Video signal connector



The above image depicts the connector responsible for transmitting any video related signals to and from the X.mio card.


**Figure 80:** Video connectors for X.mio 1 and X.mio 2

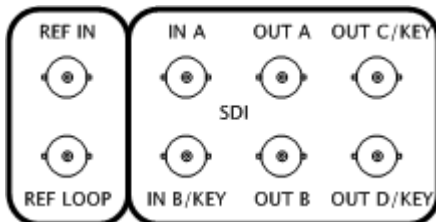

The front panel of the X.mio 1 breakout box provides the user with 8 standard **BNC** connectors.

- x2 HD/SD SDI In
- x4 HD/SD SDI Out
- x1 Analogue Ref In
- x1 Analogue Ref Loop

**Figure 81:** Video connectors for X.mio 2

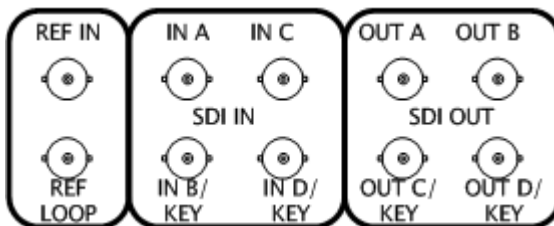


The front panel of the X.mio 2 breakout box provides the user with 8 or 10 standard **BNC** connectors.

- x2 or x4 HD/SD SDI In
- x4 HD/SD SDI Out
- x1 Analogue Ref In
- x1 Analogue Ref Loop

**IMPORTANT!** When using the Ref. In connector on the Matrox card for synchronization, the Ref. Out Loop connector must be terminated with a 75 Ohm resistor unless it is being used to loop an incoming [GenLock](#) signal.


The front side of the breakout box also hosts the various audio in- and outputs offered by Matrox X.mio.

**Figure 82:** Audio connectors for X.mio 1

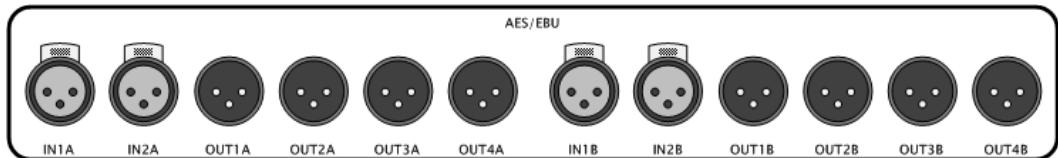

On the X.mio 1 breakout box, each of the two audio bays, A and B, consists of two female [AES/EBU](#) audio input channels and of four male [AES/EBU](#) audio output channels.

**Figure 83:** Audio connectors for X.mio 2

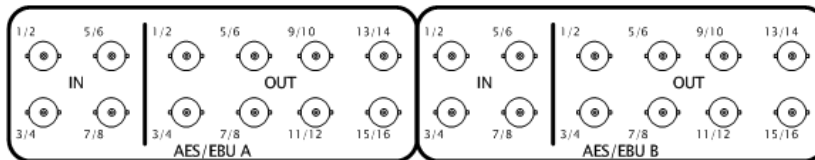

On the X.mio 2 breakout box, each of the two audio bays, A and B, consists of four female [BNC](#) audio input channels and of eight female [BNC](#) audio output channels.

**Note:** Bay cables are not included.

On the backside of each breakout box there are two connectors labeled AUDIO-A and AUDIO-B. The included cables are used to connect the corresponding plugs of the X.mio [Audio-extension Card](#) to the computer.

### Cable Wiring

The Viz Engine can either be High Definition (HD) or Standard Definition (SD). Connect the relevant video input(s) and output(s), and the reference signal(s).

SDI Out connections are only relevant when the Matrox card is used for SDI In and Out.

A reference signal can be attached to the reference input connector (Analog Ref. In) which can be fed with any analogue [GenLock](#) signal such as a Blackburst signal or a Tri-level sync as required.

If you are relaying the reference signal (for synchronization) from Matrox to a graphics card (e.g. NVIDIA) you must verify that all internal connections between the graphics card and its SDI extension are OK and that the extension is properly supplied with power.

-----  
**IMPORTANT!** When using the Ref. In connector on the Matrox card for synchronization, the Ref. Out Loop connector must be terminated with a 75 Ohm resistor unless it is being used to loop an incoming [GenLock](#) signal.  
 -----

## Audio Configuration

This section contains information on the following topics:

- [AES Input Cable Assignment](#)
- [AES Output Cable Assignment](#)
- [Embedded input](#)
- [Embedded output](#)

**Table 5:** AES Input Cable Assignment

Card	Viz audio config	AES Cable	Matrox Video Channel
<b>DSX.LE2/CG</b>	2 tracks	Not supported	
	4 tracks	Not supported	
	8 tracks	Not supported	
	16 tracks	Not supported	
<b>X.mio 1</b>	2 tracks	A IN 1	Video IN A
		B IN 1	Video IN B
	4 tracks	A IN 1+2	Video IN A
		B IN 1+2	Video IN B
	8 tracks	A IN 1+2 B IN 1+2	Video IN A
		N/A	
16 tracks	Not supported		

**Table 5: AES Input Cable Assignment**

<b>Card</b>	<b>Viz audio config</b>	<b>AES Cable</b>	<b>Matrox Video Channel</b>
<b>X.mio 2</b>	2 tracks	A IN 1/2	Video IN A
		A IN 3/4	Video IN B
		A IN 5/6	Video IN C
		A IN 7/8	Video IN D
	4 tracks	A IN 1/2+3/4	Video IN A
		A IN 5/6+7/8	Video IN B
		B IN 1/2+3/4	Video IN C
		B IN 5/6+7/8	Video IN D
	8 tracks	A IN 1/2+3/4+5/6+7/8	Video IN A or Video IN C
		B IN 1/2+3/4+5/6+7/8	Video IN B or Video IN D
	16 tracks	A IN 1/2+3/4+5/6+7/8	Video IN A or
		B IN 1/2+3/4+5/6+7/8	Video IN B or Video IN C or Video IN D

**Table 6: AES Output Cable Assignment**

<b>Card</b>	<b>Viz audio config</b>	<b>AES Cable</b>	<b>Matrox Audio Channel</b>
<b>DSX.LE2/CG</b>	2 tracks	AES OUT 1/2	Audio OUT 0
	4 tracks	AES OUT 1/2+3/4	Audio OUT 0
	8 tracks	Not supported	
	16 tracks	Not supported	
<b>X.mio 1</b>	2 tracks	A OUT 1	Audio OUT 0
		A OUT 3	Audio OUT 1
	4 tracks	A OUT 1+2	Audio OUT 0
		A OUT 3+4	Audio OUT 1
	8 tracks	A OUT 1+2 B OUT 1+2	Audio OUT 0
		A OUT 3+4 B OUT 3+4	Audio OUT 1
	16 tracks	A OUT 1+2+3+4	Audio OUT 0
		B OUT 1+2+3+4	

**Table 6: AES Output Cable Assignment**

<b>Card</b>	<b>Viz audio config</b>	<b>AES Cable</b>	<b>Matrox Audio Channel</b>
<b>X.mio 2</b>	2 tracks	A OUT 1/2	Audio OUT 0
		B OUT 1/2	Audio OUT 1
	4 tracks	A OUT 1/2+3/4	Audio OUT 0
		B OUT 1/2+3/4	Audio OUT 1
	8 tracks	A OUT 1/2+3/4+5/6+7/8	Audio OUT 0
		B OUT 1/2+3/4+5/6+7/8	Audio OUT 1
16 tracks	A OUT 1/2+3/4+5/6+7/8+9/10+11/12+13/+14+15/16	Audio OUT 0	
	B OUT 1/2+3/4+5/6+7/8+9/10+11/12+13/+14+15/16	Audio OUT 1	

**Table 7: Embedded input**


<b>Card / Viz audio config</b>	<b>2 tracks</b>	<b>4 tracks</b>	<b>8 tracks</b>	<b>16 tracks</b>
<b>DSX.LE2/CG</b>	–	–	–	–
<b>X.mio 1</b>	yes	yes	yes	yes
<b>X.mio 2</b>	yes	yes	yes	yes

**Table 8: Embedded output**

<b>Card / Viz audio config</b>	<b>2 tracks</b>	<b>4 tracks</b>	<b>8 tracks</b>	<b>16 tracks</b>
<b>DSX.LE2/CG</b>	yes	yes	yes	no
<b>X.mio 1</b>	yes	yes	yes	yes
<b>X.mio 2</b>	yes	yes	yes	yes

## Audio-extension Card

**Figure 84:** Matrox audio-extension card

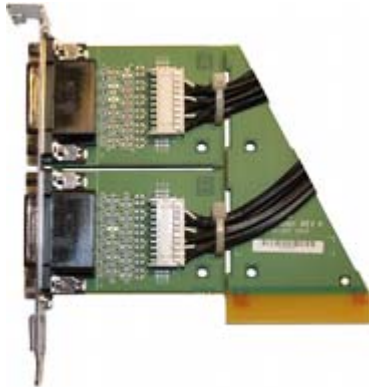

The audio-extension card and audio cables are part of the X.mio break-out box or the X.mio cable kit (that comes with the X.mio card), and needs to be installed when [AES/EBU](#) audio support is required. The card is an extension for the connectors, and does not provide any extra functionality. For installations that require embedded audio, or no audio at all, this extension is not required.

---

**IMPORTANT!** The Matrox audio-extension card only supports digital audio.

---

By default the audio-extension card will consume one additional free slot on the motherboard. The card is supplied by the Matrox X.mio card in terms of power and data.

In some cases the design of the audio-extension card (see [Figure 84: Matrox audio-extension card](#)) makes it hard to mount it at a location with an underlying [PCIe](#) slot. Therefore it is an option [To remove the audio-extension card back-end](#) instead of using another [PCI](#) or [PCI-X](#) slot. However, it is in most cases possible to mount the extension card in any slot in the machine, unrelated to the underlying slot's design, without removing its back-end.

Removing the back-end of the extension card will free any connection to the motherboard. As a result it may react more sensitively to transportation and tension introduced by the external audio cables connected to it. Therefore, the above-mentioned procedure should only be applied to machines residing in stable environment like a dedicated machine room. Do not apply these instructions to machines intended to be used for [OB](#) or equipment that will be moved around a lot.

### See Also

- [Audio Channels](#)
- [Audio Configuration](#)
- [Matrox](#) configuration interface
- [Supported Codecs](#)
- [Video Card Installation](#)

### 8.3.2 Supported Codecs

Similar to the Pinnacle Targa 3200, the Matrox X.mio and X.mio2 supports a selection of different codecs for both SD and HD.

All codecs are implemented in software. Matrox uses the card itself as a kind of dongle for the software codecs, therefore certain codecs require certain card classes as follows:

- 6000 class = SD codecs only. No D10
- 8000 class = same as 6000 + HD codecs and D10, D12

The Matrox X.mio 24/6000 card, including all SD codecs, except D10/D12, is Vizrt's standard card. This model can be upgraded to any higher model-class by performing a license upgrade.

The following codec types are supported:

- [PAL Codecs](#)
- [NTSC Codecs](#)
- [720P50 Codecs](#)
- [720P60M Codecs](#)
- [1080i25 Codecs](#)
- [1080i30M Codecs](#)



## PAL Codecs

Name	Container	Codec / Resolution		Audio
Generic Interleaved	.avi	MPEG2-IFrame422 720x576	alpha: no bitrate: 10-50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG2-IFrame4224 720x576	alpha: yes bitrate: 10-50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP SD 4:2:0, Elementary 720x576	alpha: no bitrate: 1-15 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP SD 4:2:0, Programm 720x576	alpha: no bitrate: 1-15 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP SD 4:2:0, Transport 720x576	alpha: no bitrate: 1-15 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP SD 4:2:2, Elementary 720x576	alpha: no bitrate: 5-50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP SD 4:2:2, Programm 720x576	alpha: no bitrate: 5-50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz

<b>Name</b>	<b>Container</b>	<b>Codec / Resolution</b>	<b>Video</b>	<b>Audio</b>
Generic Interleaved	.avi	MPEG-2 IBP SD 4:2:2, Transport 720x576	alpha: no bitrate: 5-50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	DV/DVCAM 4:2:0 720x576	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	DVCPRO 4:1:1 720x576	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	DVCPRO 50 4:2:2 720x576	alpha: no bitrate: 50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	Uncompressed YUVU 4:2:2 720x576	alpha: no bitrate: 160 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	Uncompressed YUAVUA 4:2:2:4 720x576	alpha: no bitrate: 240 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MJpeg Lossless 720x576	alpha: no bitrate: VBR bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz

<b>Name</b>	<b>Container</b>	<b>Codec / Resolution</b>		<b>Audio</b>
XDCAM (OP1a)	.mxf	DVCAM 4:2:0 720x576	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 4 ch: 16 in 16bit; 48kHz
XDCAM (OP1a)	.mxf	D10 (IMX) 4:2:2 720x608	alpha: no bitrate: 30, 40, 50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 4 ch: 24 in 32bit; 48kHz 8 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2 IBP SD 4:2:0, Elementary 720x576	alpha: no bitrate: 1-15 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2 IBP SD 4:2:0, Programm 720x576	alpha: no bitrate: 1-15 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2 IBP SD 4:2:0, Transport 720x576	alpha: no bitrate: 1-15 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2 IBP SD 4:2:2, Elementary 720x576	alpha: no bitrate: 5-50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2 IBP SD 4:2:2, Programm 720x576	alpha: no bitrate: 5-50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2 IBP SD 4:2:2, Transport 720x576	alpha: no bitrate: 5-50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz

Name	Container	Codec / Resolution		Audio
DVCPRO	.mxf	DVCPRO 4:1:1 720x576	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
DVCPRO	.mxf	DVCPRO 50 4:2:2 720x576	alpha: no bitrate: 50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Panasonic P2	.mxf	DVCAM 4:2:0 720x576	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Panasonic P2	.mxf	DVCPRO 4:1:1 720x576	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Panasonic P2	.mxf	DVCPRO 50 4:2:2 720x576	alpha: no bitrate: 50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
XDCAM	.mov	DVCAM 4:2:0 720x576	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
DVCPRO	.mov	DVCPRO 4:1:1 720x576	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
DVCPRO	.mov	DVCPRO 50 4:2:2 720x576	alpha: no bitrate: 50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz

Name	Container	Codec / Resolution		Audio
H.246	.mov	H.264/AVC 720x576	alpha: no bitrate: VBR bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
H.246	.mp4	H.264/AVC 720x576	alpha: no bitrate: VBR bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
DV	.dv	DVCAM 4:2:0 720x576	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz
DV	.dv	DVCPRO 4:1:1 720x576	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz
DV	.dv	DVCPRO 50 4:2:2 720x576	alpha: no bitrate: 50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz
Generic Separate	.avi	MPEG2- IFrame422 720x576	alpha: no bitrate: 10-50 bitdepth: 8 VBI: N/A timecode: N/A	
Generic Separate	.avi	MPEG2- IFrame4224 720x576	alpha: yes bitrate: 10-50 bitdepth: 8 VBI: N/A timecode: N/A	
Generic Separate	.avi	MPEG-2 IBP SD 4:2:0, Elementary 720x576	alpha: no bitrate: 1-15 bitdepth: 8 VBI: N/A timecode: N/A	

Name	Container	Codec / Resolution	Audio
Generic Separate	.avi	MPEG-2 IBP SD 4:2:0, Programm 720x576	alpha: no bitrate: 1-15 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	MPEG-2 IBP SD 4:2:0, Transport 720x576	alpha: no bitrate: 1-15 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	MPEG-2 IBP SD 4:2:2, Elementary 720x576	alpha: no bitrate: 5-50 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	MPEG-2 IBP SD 4:2:2, Programm 720x576	alpha: no bitrate: 5-50 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	MPEG-2 IBP SD 4:2:2, Transport 720x576	alpha: no bitrate: 5-50 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	DV/DVCAM 4:2:0 720x576	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	DVCPRO 4:1:1 720x576	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	DVCPRO 50 4:2:2 720x576	alpha: no bitrate: 50 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	Uncompressed YUVU 4:2:2 720x576	alpha: no bitrate: 160 bitdepth: 8 VBI: N/A timecode: N/A

Name	Container	Codec / Resolution	Audio
Generic Separate	.avi	Uncompressed YUAVUA 4:2:2:4 720x576	alpha: no bitrate: 240 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	MJpeg Lossless 720x576	alpha: no bitrate: VBR bitdepth: 8 VBI: N/A timecode: N/A
XDCAM	.mov	DVCAM 4:2:0 720x576	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A
DVCPRO	.mov	DVCPRO 4:1:1 720x576	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A
DVCPRO	.mov	DVCPRO 50 4:2:2 720x576	alpha: no bitrate: 50 bitdepth: 8 VBI: N/A timecode: N/A
H.246	.mov	H.264/AVC 720x576	alpha: no bitrate: VBR bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.wav		PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Separate	_vbi. avi	vbi 720x1-17 Start Line: 6	bitdepth: 10 VBI: YUYV422

## NTSC Codecs

Name	Container	Codec / Resolution		Audio
Generic Interleaved	.avi	MPEG2-IFrame422 720x480	alpha: no bitrate: 10-50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG2-IFrame4224 720x480	alpha: yes bitrate: 10-50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP SD 4:2:0, Elementary 720x480	alpha: no bitrate: 1-15 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP SD 4:2:0, Programm 720x480	alpha: no bitrate: 1-15 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP SD 4:2:0, Transport 720x480	alpha: no bitrate: 1-15 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP SD 4:2:2, Elementary 720x480	alpha: no bitrate: 5-50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP SD 4:2:2, Programm 720x480	alpha: no bitrate: 5-50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz



Name	Container	Codec / Resolution		Audio
Generic Interleaved	.avi	MPEG-2 IBP SD 4:2:2, Transport 720x480	alpha: no bitrate: 5-50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	DV/DVCAM 4:1:1 720x480	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	DVCPRO 4:1:1 720x480	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	DVCPRO 50 4:2:2 720x480	alpha: no bitrate: 1-15 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	Uncompressed YUVU 4:2:2 720x480	alpha: no bitrate: 160 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	Uncompressed YUAVUA 4:2:2:4 720x480	alpha: no bitrate: 240 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MJpeg Lossless 720x480	alpha: no bitrate: VBR bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz

Name	Container	Codec / Resolution		Audio
XDCAM (OP1a)	.mxf	DVCAM 4:1:1 720x480	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 4 ch: 16 in 16bit; 48kHz
XDCAM (OP1a)	.mxf	D10 (IMX) 4:2:2 720x512	alpha: no bitrate: 30, 40, 50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 4 ch: 24 in 32bit; 48kHz 8 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2 IBP SD 4:2:0, Elementary 720x480	alpha: no bitrate: 1-15 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2 IBP SD 4:2:0, Programm 720x480	alpha: no bitrate: 1-15 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2 IBP SD 4:2:0, Transport 720x480	alpha: no bitrate: 1-15 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2 IBP SD 4:2:2, Elementary 720x480	alpha: no bitrate: 5-50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2 IBP SD 4:2:2, Programm 720x480	alpha: no bitrate: 5-50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2 IBP SD 4:2:2, Transport 720x480	alpha: no bitrate: 5-50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz

Name	Container	Codec / Resolution		Audio
DVCPRO	.mxf	DVCPRO 4:1:1 720x480	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
DVCPRO	.mxf	DVCPRO 50 4:2:2 720x480	alpha: no bitrate: 50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Panasonic P2	.mxf	DV/DVCAM 4:1:1 720x480	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Panasonic P2	.mxf	DVCPRO 4:1:1 720x480	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Panasonic P2	.mxf	DVCPRO 50 4:2:2 720x480	alpha: no bitrate: 50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
XDCAM (OP1a)	.mov	DVCAM 4:1:1 720x480	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
DVCPRO	.mov	DVCPRO 4:1:1 720x480	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
DVCPRO	.mov	DVCPRO 50 4:2:2 720x480	alpha: no bitrate: 50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz

Name	Container	Codec / Resolution		Audio
H.246	.mov	H.264/AVC 720x480	alpha: no bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
H.246	.mp4	H.264/AVC 720x480	alpha: no bitrate: VBR bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
DV	.dv	DV/DVCAM 4:1:1 720x480	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz
DV	.dv	DVCPRO 4:1:1 720x480	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz
DV	.dv	DVCPRO 50 4:2:2 720x480	alpha: no bitrate: 50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz
Generic Separate	.avi	MPEG2- IFrame422 720x480	alpha: no bitrate: 10-50 bitdepth: 8 VBI: N/A timecode: N/A	
Generic Separate	.avi	MPEG2- IFrame4224 720x480	alpha: yes bitrate: 10-50 bitdepth: 8 VBI: N/A timecode: N/A	
Generic Separate	.avi	MPEG-2 IBP SD 4:2:0, Elementary 720x480	alpha: no bitrate: 1-15 bitdepth: 8 VBI: N/A timecode: N/A	
Generic Separate	.avi	MPEG-2 IBP SD 4:2:0, Programm 720x480	alpha: no bitrate: 1-15 bitdepth: 8 VBI: N/A timecode: N/A	

<b>Name</b>	<b>Cont ainer</b>	<b>Codec / Resolution</b>	<b>Audio</b>
Generic Separate	.avi	MPEG-2 IBP SD 4:2:0, Transport 720x480	alpha: no bitrate: 1-15 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	MPEG-2 IBP SD 4:2:2, Elementary 720x480	alpha: no bitrate: 5-50 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	MPEG-2 IBP SD 4:2:2, Programm 720x480	alpha: no bitrate: 5-50 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	MPEG-2 IBP SD 4:2:2, Transport 720x480	alpha: no bitrate: 5-50 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	DV/DVCAM 4:1:1 720x480	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	DVCPRO 4:1:1 720x480	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	DVCPRO 50 4:2:2 720x480	alpha: no bitrate: 50 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	Uncompres sed YUVU 4:2:2 720x480	alpha: no bitrate: 160 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	Uncompres sed YUAVUA 4:2:2:4 720x480	alpha: no bitrate: 240 bitdepth: 8 VBI: N/A timecode: N/A

Name	Container	Codec / Resolution	Audio
Generic Separate	.avi	MJpeg Lossless 720x480	alpha: no bitrate: VBR bitdepth: 8 VBI: N/A timecode: N/A
XDCAM (OP1a)	.mov	DVCAM 4:1:1 720x480	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A
DVCPRO	.mov	DVCPRO 4:1:1 720x480	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A
DVCPRO	.mov	DVCPRO 50 4:2:2 720x480	alpha: no bitrate: 50 bitdepth: 8 VBI: N/A timecode: N/A
H.246	.mov	H.264/AVC 720x486	alpha: no bitrate: VBR bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.wav		PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Separate	_vbi. avi	vbi 720x1-16 Start Line: 7	bitdepth: 10 VBI: YUYV422

## 720P50 Codecs

Name	Container	Codec / Resolution		Audio
Generic Interleaved	.avi	MPEG2-IFrame422 1280x720	alpha: no bitrate: 50-300 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG2-IFrame4224 1280x720	alpha: yes bitrate: 50-300 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP HD 4:2:0, Elementary 1280x720	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP HD 4:2:0, Program 1280x720	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP HD 4:2:0, Transport 1280x720	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP HD 4:2:2, Elementary 1280x720	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP HD 4:2:2, Program 1280x720	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz

Name	Container	Codec / Resolution		Audio
Generic Interleaved	.avi	MPEG-2 IBP HD 4:2:2, Transport 1280x720	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
DVCPRO	.avi	DVCPRO HD 1280x720	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	Uncompressed YUVU 4:2:2 1280x720	alpha: no bitrate: 700 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	Uncompressed YUAVUA 4:2:2:4 1280x720	alpha: no bitrate: 1050 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
XDCAM (OP1a)	.mxf	XDCAM HD, IBP HD 4:2:0, Elementary 1280x720	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
XDCAM (OP1a)	.mxf	XDCAM HD, IBP HD 4:2:0, Program 1280x720	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
XDCAM (OP1a)	.mxf	XDCAM HD, IBP HD 4:2:0, Transport 1280x720	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
XDCAM (OP1a)	.mxf	XDCAM HD422, IBP HD 4:2:2, Elementary 1280x720	alpha: no bitrate: 50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz



Name	Container	Codec / Resolution	Audio
XDCAM (OP1a)	.mxf	XDCAM HD422, IBP HD 4:2:2, Program 1280x720	alpha: no bitrate: 50 bitdepth: 8 VBI: N/A timecode: N/A PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz
XDCAM (OP1a)	.mxf	XDCAM HD422, IBP HD 4:2:2, Transport 1280x720	alpha: no bitrate: 50 bitdepth: 8 VBI: N/A timecode: N/A PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2, IBP HD 4:2:0, Elementary 1280x720	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2, IBP HD 4:2:0, Program 1280x720	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2, IBP HD 4:2:0, Transport 1280x720	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2, IBP HD 4:2:2, Elementary 1280x720	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2, IBP HD 4:2:2, Program 1280x720	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2, IBP HD 4:2:2, Transport 1280x720	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
DVCPRO	.mxf	DVCPRO HD 1280x720	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz

Name	Container	Codec / Resolution		Audio
Panasonic P2	.mxf	AVCIntra Class 50 1280x720	alpha: no bitrate: 50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz
Panasonic P2	.mxf	AVCIntra Class 100 1280x720	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz
Panasonic P2	.mxf	DVCPRO HD 1280x720	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz
DVCPRO Quicktime	.mov	DVCPRO HD 1280x720	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz
HDV	.mov	HDV 1280x720	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
XDCAM (OP1a)	.mov	XDCam EX 1280x720	alpha: no bitrate: 25CBR, 35VBR bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
XDCAM (OP1a)	.mov	XDCam HD 422 1280x720	alpha: no bitrate: 18–35 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
DNxHD	.mov	DNxHD 4:2:2 1280x720	alpha: no bitrate: 36, 145, 220 bitdepth: 8; 10 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz

Name	Container	Codec / Resolution		Audio
H.264	.mov	H.264/AVC 1280x720	alpha: no bitrate: VBR bitdepth: 8; 10 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
H.264	.mp4	H.264/AVC 1280x720	alpha: no bitrate: VBR bitdepth: 8; 10 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
DV	.dv	DVCPRO HD 1280x720	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz
ProRes 422	.mov	I-Frame 4:2:2 1280x720	alpha: no bitrate: 147, 220 bitdepth: 10 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
Generic Separate	.avi	MPEG2- IFrame422 1280x720	alpha: no bitrate: 50-300 bitdepth: 8 VBI: N/A timecode: N/A	
Generic Separate	.avi	MPEG2- IFrame4224 1280x720	alpha: yes bitrate: 50-300 bitdepth: 8 VBI: N/A timecode: N/A	
Generic Separate	.avi	MPEG-2 IBP HD 4:2:0, Elementary 1280x720	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A	
Generic Separate	.avi	MPEG-2 IBP HD 4:2:0, Program 1280x720	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A	

Name	Container	Codec / Resolution	Audio
Generic Separate	.avi	MPEG-2 IBP HD 4:2:0, Transport 1280x720	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	MPEG-2 IBP HD 4:2:2, Elementary 1280x720	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	MPEG-2 IBP HD 4:2:2, Program 1280x720	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	MPEG-2 IBP HD 4:2:2, Transport 1280x720	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A
DVCPRO	.avi	DVCPRO HD 1280x720	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	Uncompressed YUVU 4:2:2 1280x720	alpha: no bitrate: 700 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	Uncompressed YUAVUA 4:2:2:4 1280x720	alpha: no bitrate: 1050 bitdepth: 8 VBI: N/A timecode: N/A
DVCPRO Quicktime	.mov	DVCPRO HD 1280x720	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A
HDV	.mov	HDV 1280x720	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A

Name	Container	Codec / Resolution	Audio
XDCAM (OP1a)	.mov	XDCam EX 1280x720	alpha: no bitrate: 25CBR, 35VBR bitdepth: 8 VBI: N/A timecode: N/A
XDCAM (OP1a)	.mov	XDCam HD 422 1280x720	alpha: no bitrate: 18–35 bitdepth: 8 VBI: N/A timecode: N/A
DNxHD	.mov	DNxHD YUVU 4:2:2 1280x720	alpha: no bitrate: 36, 145, 220 bitdepth: 8; 10 VBI: N/A timecode: N/A
H.264	.mov	H.264 YUVU 4:2:2 1280x720	alpha: no bitrate: VBR bitdepth: 8; 10 VBI: N/A timecode: N/A
Generic Separate	.wav		PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Separate	_vbi. avi	vbi 1280x1–19 Start Line: 7	bitdepth: 10 VBI: YUYV422

## 720P60M Codecs

Name	Container	Codec / Resolution		Audio
Generic Interleaved	.avi	MPEG2-IFrame422 1280x720	alpha: no bitrate: 50-300 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG2-IFrame4224 1280x720	alpha: yes bitrate: 50-300 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP HD 4:2:0, Elementary 1280x720	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP HD 4:2:0, Program 1280x720	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP HD 4:2:0, Transport 1280x720	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP HD 4:2:2, Elementary 1280x720	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP HD 4:2:2, Program 1280x720	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz

Name	Container	Codec / Resolution		Audio
Generic Interleaved	.avi	MPEG-2 IBP HD 4:2:2, Transport 1280x720	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
DVCPRO	.avi	DVCPRO HD 1280x720	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	Uncompressed YUVU 4:2:2 1280x720	alpha: no bitrate: 850 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	Uncompressed YUAVUA 4:2:2:4 1280x720	alpha: no bitrate: 1275 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
XDCAM (OP1a)	.mxf	XDCAM HD, IBP HD 4:2:0, Elementary 1280x720	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
XDCAM (OP1a)	.mxf	XDCAM HD, IBP HD 4:2:0, Program 1280x720	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
XDCAM (OP1a)	.mxf	XDCAM HD, IBP HD 4:2:0, Transport 1280x720	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
XDCAM (OP1a)	.mxf	XDCAM HD422, IBP HD 4:2:2, Elementary 1280x720	alpha: no bitrate: 50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz

<b>Name</b>	<b>Container</b>	<b>Codec / Resolution</b>	<b>Audio</b>
XDCAM (OP1a)	.mxf	XDCAM HD422, IBP HD 4:2:2, Program 1280x720	alpha: no bitrate: 50 bitdepth: 8 VBI: N/A timecode: N/A PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz
XDCAM (OP1a)	.mxf	XDCAM HD422, IBP HD 4:2:2, Transport 1280x720	alpha: no bitrate: 50 bitdepth: 8 VBI: N/A timecode: N/A PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2, IBP HD 4:2:0, Elementary 1280x720	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2, IBP HD 4:2:0, Program 1280x720	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2, IBP HD 4:2:0, Transport 1280x720	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2, IBP HD 4:2:2, Elementary 1280x720	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2, IBP HD 4:2:2, Program 1280x720	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2, IBP HD 4:2:2, Transport 1280x720	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
DVCPRO	.mxf	DVCPRO HD 1280x720	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz



Name	Container	Codec / Resolution		Audio
Panasonic P2	.mxf	AVCIntra Class 50 1280x720	alpha: no bitrate: 50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz
Panasonic P2	.mxf	AVCIntra Class 100 1280x720	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz
Panasonic P2	.mxf	DVCPRO HD 1280x720	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz
DVCPRO Quicktime	.mov	DVCPRO HD 1280x720	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz
HDV	.mov	HDV 1280x720	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
XDCAM (OP1a)	.mov	XDCam EX 1280x720	alpha: no bitrate: 25CBR, 35VBR bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
XDCAM (OP1a)	.mov	XDCam HD 422 1280x720	alpha: no bitrate: 18–35 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
DNxHD	.mov	DNxHD 4:2:2 1280x720	alpha: no bitrate: 36, 145, 220 bitdepth: 8; 10 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz

Name	Container	Codec / Resolution		Audio
H.264	.mov	H.264/AVC 1280x720	alpha: no bitrate: VBR bitdepth: 8; 10 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
H.264	.mp4	H.264/AVC 1280x720	alpha: no bitrate: VBR bitdepth: 8; 10 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
DV	.dv	DVCPRO HD 1280x720	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz
ProRes 422	.mov	I-Frame 4:2:2 1280x720	alpha: no bitrate: 147, 220 bitdepth: 10 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
Generic Separate	.avi	MPEG2- IFrame422 1280x720	alpha: no bitrate: 50-300 bitdepth: 8 VBI: N/A timecode: N/A	
Generic Separate	.avi	MPEG2- IFrame4224 1280x720	alpha: yes bitrate: 50-300 bitdepth: 8 VBI: N/A timecode: N/A	
Generic Separate	.avi	MPEG-2 IBP HD 4:2:0, Elementary 1280x720	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A	
Generic Separate	.avi	MPEG-2 IBP HD 4:2:0, Program 1280x720	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A	

Name	Container	Codec / Resolution	Audio
Generic Separate	.avi	MPEG-2 IBP HD 4:2:0, Transport 1280x720	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	MPEG-2 IBP HD 4:2:2, Elementary 1280x720	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	MPEG-2 IBP HD 4:2:2, Program 1280x720	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	MPEG-2 IBP HD 4:2:2, Transport 1280x720	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A
DVCPRO	.avi	DVCPRO HD 1280x720	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	Uncompressed YUVU 4:2:2 1280x720	alpha: no bitrate: 850 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	Uncompressed YUAVUA 4:2:2:4 1280x720	alpha: no bitrate: 1275 bitdepth: 8 VBI: N/A timecode: N/A
DVCPRO Quicktime	.mov	DVCPRO HD 1280x720	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A
HDV	.mov	HDV 1280x720	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A

Name	Container	Codec / Resolution	Audio
XDCAM (OP1a)	.mov	XDCam EX 1280x720	alpha: no bitrate: 25CBR, 35VBR bitdepth: 8 VBI: N/A timecode: N/A
XDCAM (OP1a)	.mov	XDCam HD 422 1280x720	alpha: no bitrate: 18–35 bitdepth: 8 VBI: N/A timecode: N/A
DNxHD	.mov	DNxHD YUVU 4:2:2 1280x720	alpha: no bitrate: 36, 145, 220 bitdepth: 8; 10 VBI: N/A timecode: N/A
H.264	.mov	H.264 YUVU 4:2:2 1280x720	alpha: no bitrate: VBR bitdepth: 8; 10 VBI: N/A timecode: N/A
Generic Separate	.wav		PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Separate	_vbi. avi	vbi 1280x1–19 Start Line: 7	bitdepth: 10 VBI: YUYV422

## 1080i25 Codecs

Name	Container	Codec / Resolution		Audio
Generic Interleaved	.avi	MPEG2-IFrame422 1920x1080	alpha: no bitrate: 50-300 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG2-IFrame4224 1920x1080	alpha: yes bitrate: 50-300 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP HD 4:2:0, Elementary 1920x1080	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP HD 4:2:0, Program 1920x1080	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP HD 4:2:0, Transport 1920x1080	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP HD 4:2:2, Elementary 1920x1080	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP HD 4:2:2, Program 1920x1080	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz

Name	Container	Codec / Resolution		Audio
Generic Interleaved	.avi	MPEG-2 IBP HD 4:2:2, Transport 1920x1080	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
DVCPRO	.avi	DVCPRO HD 1920x1080	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	Uncompressed YUVU 4:2:2 1920x1080	alpha: no bitrate: 800 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	Uncompressed YUAVUA 4:2:2:4 1920x1080	alpha: no bitrate: 1200 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
XDCAM (OP1a)	.mxf	XDCAM HD, IBP HD 4:2:0, Elementary 1440x1080	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
XDCAM (OP1a)	.mxf	XDCAM HD, IBP HD 4:2:0, Program 1440x1080	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
XDCAM (OP1a)	.mxf	XDCAM HD, IBP HD 4:2:0, Transport 1440x1080	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
XDCAM (OP1a)	.mxf	XDCAM HD422, IBP HD 4:2:2, Elementary 1920x1080	alpha: no bitrate: 50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz

Name	Container	Codec / Resolution	Audio	
XDCAM (OP1a)	.mxf	XDCAM HD422, IBP HD 4:2:2, Program 1920x1080	alpha: no bitrate: 50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz
XDCAM (OP1a)	.mxf	XDCAM HD422, IBP HD 4:2:2, Transport 1920x1080	alpha: no bitrate: 50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2, IBP HD 4:2:0, Elementary 1920x1080	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2, IBP HD 4:2:0, Program 1920x1080	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2, IBP HD 4:2:0, Transport 1920x1080	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2, IBP HD 4:2:2, Elementary 1920x1080	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2, IBP HD 4:2:2, Program 1920x1080	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2, IBP HD 4:2:2, Transport 1920x1080	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
DVCPRO	.mxf	DVCPRO HD 1920x1080	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz

Name	Container	Codec / Resolution		Audio
Panasonic P2	.mxf	AVCIntra Class 50 1920x1080	alpha: no bitrate: 50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz
Panasonic P2	.mxf	AVCIntra Class 100 1920x1080	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz
Panasonic P2	.mxf	DVCPRO HD 1920x1080	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz
DVCPRO Quicktime	.mov	DVCPRO HD 1920x1080	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz
HDV	.mov	HDV 1440x1080	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
XDCAM (OP1a)	.mov	XDCam EX 1920x1080	alpha: no bitrate: 25CBR, 35VBR bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
XDCAM (OP1a)	.mov	XDCam HD 1440x1080	alpha: no bitrate: 35 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
XDCAM (OP1a)	.mov	XDCam HD 422 1920x1080	alpha: no bitrate: 18–35 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz



Name	Container	Codec / Resolution		Audio
DNxHD	.mov	DNxHD 4:2:2 1920x1080	alpha: no bitrate: 36, 145, 220 bitdepth: 8; 10 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
H.264	.mov	H.264/AVC 1920x1080	alpha: no bitrate: VBR bitdepth: 8; 10 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
H.264	.mp4	H.264/AVC 1920x1080	alpha: no bitrate: VBR bitdepth: 8; 10 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
DV	.dv	DVCPRO HD 1920x1080	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz
ProRes 422	.mov	I-Frame 4:2:2 1920x1080	alpha: no bitrate: 42, 63 bitdepth: 10 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
Generic Separate	.avi	MPEG2- IFrame422 1920x1080	alpha: no bitrate: 50-300 bitdepth: 8 VBI: N/A timecode: N/A	
Generic Separate	.avi	MPEG2- IFrame4224 1920x1080	alpha: yes bitrate: 50-300 bitdepth: 8 VBI: N/A timecode: N/A	
Generic Separate	.avi	MPEG-2 IBP HD 4:2:0, Elementary 1920x1080	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A	

Name	Container	Codec / Resolution	Audio
Generic Separate	.avi	MPEG-2 IBP HD 4:2:0, Program 1920x1080	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	MPEG-2 IBP HD 4:2:0, Transport 1920x1080	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	MPEG-2 IBP HD 4:2:2, Elementary 1920x1080	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	MPEG-2 IBP HD 4:2:2, Program 1920x1080	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	MPEG-2 IBP HD 4:2:2, Transport 1920x1080	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A
DVCPRO	.avi	DVCPRO HD 1920x1080	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	Uncompressed YUVU 4:2:2 1920x1080	alpha: no bitrate: 800 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	Uncompressed YUAVUA 4:2:2:4 1920x1080	alpha: no bitrate: 1200 bitdepth: 8 VBI: N/A timecode: N/A
DVCPRO Quicktime	.mov	DVCPRO HD 1920x1080	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A

Name	Container	Codec / Resolution	Audio
HDV	.mov	HDV 1440x1080	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A
XDCAM (OP1a)	.mov	XDCam EX 1920x1080	alpha: no bitrate: 25CBR, 35VBR bitdepth: 8 VBI: N/A timecode: N/A
XDCAM (OP1a)	.mov	XDCam HD 1440x1080	alpha: no bitrate: 35 bitdepth: 8 VBI: N/A timecode: N/A
XDCAM (OP1a)	.mov	XDCam HD 422 1920x1080	alpha: no bitrate: 18–35 bitdepth: 8 VBI: N/A timecode: N/A
DNxHD	.mov	DNxHD YUVU 4:2:2 1920x1080	alpha: no bitrate: 36, 145, 220 bitdepth: 8; 10 VBI: N/A timecode: N/A
H.264	.mov	H.264 YUVU 4:2:2 1920x1080	alpha: no bitrate: VBR bitdepth: 8; 10 VBI: N/A timecode: N/A
Generic Separate	.wav		PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Separate	_vbi. avi	vbi 1920x1–15 Start Line: 6	bitdepth: 10 VBI: YUYV422

## 1080i30M Codecs

Name	Container	Codec / Resolution		Audio
Generic Interleaved	.avi	MPEG2-IFrame422 1920x1080	alpha: no bitrate: 50-300 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG2-IFrame4224 1920x1080	alpha: yes bitrate: 50-300 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP HD 4:2:0, Elementary 1920x1080	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP HD 4:2:0, Program 1920x1080	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP HD 4:2:0, Transport 1920x1080	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP HD 4:2:2, Elementary 1920x1080	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	MPEG-2 IBP HD 4:2:2, Program 1920x1080	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz

Name	Container	Codec / Resolution		Audio
Generic Interleaved	.avi	MPEG-2 IBP HD 4:2:2, Transport 1920x1080	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
DVCPRO	.avi	DVCPRO HD 1920x1080	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	Uncompressed YUVU 4:2:2 1920x1080	alpha: no bitrate: 950 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Interleaved	.avi	Uncompressed YUAVUA 4:2:2:4 1920x1080	alpha: no bitrate: 1425 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
XDCAM (OP1a)	.mxf	XDCAM HD, IBP HD 4:2:0, Elementary 1440x1080	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
XDCAM (OP1a)	.mxf	XDCAM HD, IBP HD 4:2:0, Program 1440x1080	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
XDCAM (OP1a)	.mxf	XDCAM HD, IBP HD 4:2:0, Transport 1440x1080	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
XDCAM (OP1a)	.mxf	XDCAM HD422, IBP HD 4:2:2, Elementary 1920x1080	alpha: no bitrate: 50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz

Name	Container	Codec / Resolution		Audio
XDCAM (OP1a)	.mxf	XDCAM HD422, IBP HD 4:2:2, Program 1920x1080	alpha: no bitrate: 50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz
XDCAM (OP1a)	.mxf	XDCAM HD422, IBP HD 4:2:2, Transport 1920x1080	alpha: no bitrate: 50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2, IBP HD 4:2:0, Elementary 1920x1080	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2, IBP HD 4:2:0, Program 1920x1080	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2, IBP HD 4:2:0, Transport 1920x1080	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2, IBP HD 4:2:2, Elementary 1920x1080	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2, IBP HD 4:2:2, Program 1920x1080	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
Generic MPEG-2	.mxf	MPEG-2, IBP HD 4:2:2, Transport 1920x1080	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz
DVCPRO	.mxf	DVCPRO HD 1920x1080	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz

Name	Container	Codec / Resolution		Audio
Panasonic P2	.mxf	AVCIntra Class 50 1920x1080	alpha: no bitrate: 50 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz
Panasonic P2	.mxf	AVCIntra Class 100 1920x1080	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz
Panasonic P2	.mxf	DVCPRO HD 1920x1080	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz
DVCPRO Quicktime	.mov	DVCPRO HD 1920x1080	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz
HDV	.mov	HDV 1440x1080	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
XDCAM (OP1a)	.mov	XDCam EX 1920x1080	alpha: no bitrate: 25CBR, 35VBR bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
XDCAM (OP1a)	.mov	XDCam HD 1440x1080	alpha: no bitrate: 35 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
XDCAM (OP1a)	.mov	XDCam HD 422 1920x1080	alpha: no bitrate: 18–35 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz

Name	Container	Codec / Resolution		Audio
DNxHD	.mov	DNxHD 4:2:2 1920x1080	alpha: no bitrate: 36, 145, 220 bitdepth: 8; 10 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
H.264	.mov	H.264/AVC 1920x1080	alpha: no bitrate: VBR bitdepth: 8; 10 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
H.264	.mp4	H.264/AVC 1920x1080	alpha: no bitrate: VBR bitdepth: 8; 10 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
DV	.dv	DVCPRO HD 1920x1080	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz
ProRes 422	.mov	I-Frame 4:2:2 1920x1080	alpha: no bitrate: 42, 63 bitdepth: 10 VBI: N/A timecode: N/A	PCM 2 ch: 16 in 16bit; 48kHz 4 ch: 16 in 16bit; 48kHz 8 ch: 16 in 16bit; 48kHz
Generic Separate	.avi	MPEG2- IFrame422 1920x1080	alpha: no bitrate: 50-300 bitdepth: 8 VBI: N/A timecode: N/A	
Generic Separate	.avi	MPEG2- IFrame4224 1920x1080	alpha: yes bitrate: 50-300 bitdepth: 8 VBI: N/A timecode: N/A	
Generic Separate	.avi	MPEG-2 IBP HD 4:2:0, Elementary 1920x1080	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A	



Name	Container	Codec / Resolution	Audio
Generic Separate	.avi	MPEG-2 IBP HD 4:2:0, Program 1920x1080	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	MPEG-2 IBP HD 4:2:0, Transport 1920x1080	alpha: no bitrate: 5-80 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	MPEG-2 IBP HD 4:2:2, Elementary 1920x1080	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	MPEG-2 IBP HD 4:2:2, Program 1920x1080	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	MPEG-2 IBP HD 4:2:2, Transport 1920x1080	alpha: no bitrate: 5-300 bitdepth: 8 VBI: N/A timecode: N/A
DVCPRO	.avi	DVCPRO HD 1920x1080	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	Uncompressed YUVU 4:2:2 1920x1080	alpha: no bitrate: 950 bitdepth: 8 VBI: N/A timecode: N/A
Generic Separate	.avi	Uncompressed YUAVUA 4:2:2:4 1920x1080	alpha: no bitrate: 1425 bitdepth: 8 VBI: N/A timecode: N/A
DVCPRO Quicktime	.mov	DVCPRO HD 1920x1080	alpha: no bitrate: 100 bitdepth: 8 VBI: N/A timecode: N/A

Name	Container	Codec / Resolution	Audio
HDV	.mov	HDV 1440x1080	alpha: no bitrate: 25 bitdepth: 8 VBI: N/A timecode: N/A
XDCAM (OP1a)	.mov	XDCam EX 1920x1080	alpha: no bitrate: 25CBR, 35VBR bitdepth: 8 VBI: N/A timecode: N/A
XDCAM (OP1a)	.mov	XDCam HD 1440x1080	alpha: no bitrate: 35 bitdepth: 8 VBI: N/A timecode: N/A
XDCAM (OP1a)	.mov	XDCam HD 422 1920x1080	alpha: no bitrate: 18–35 bitdepth: 8 VBI: N/A timecode: N/A
DNxHD	.mov	DNxHD YUVU 4:2:2 1920x1080	alpha: no bitrate: 36, 145, 220 bitdepth: 8; 10 VBI: N/A timecode: N/A
H.264	.mov	H.264 YUVU 4:2:2 1920x1080	alpha: no bitrate: VBR bitdepth: 8; 10 VBI: N/A timecode: N/A
Generic Separate	.wav		PCM 2 ch: 24 in 32bit; 48kHz 4 ch: 24 in 32bit; 48kHz 8 ch: 24 in 32bit; 48kHz 16 ch: 24 in 32bit; 48kHz
Generic Separate	_vbi. avi	vbi 1920x1–15 Start Line: 6	bitdepth: 10 VBI: YUYV422

### See Also

- [Licensing](#)

### 8.3.3 Video Card Installation


Installing a video or an audio-extension card is under normal circumstances not necessary as all components are pre-installed on all new systems with the latest driver versions; however, for maintenance or upgrade issues it is important to know how to do the installation for the different models.

This section contains information on the following procedures:

- To install X.mio 2 in an HP z800
- To install X.mio 2 in an HP z800 with two graphics cards
- To install X.mio 2 in an HP xw8600
- To install X.mio 1 in an HP xw8600
- To install X.mio 1 in an HP xw8400
- To install X.mio 1 in an HP xw8200
- To install X.mio 1 in an HP xw8400
- To replace a video card
- To connect the audio-extension card to the video card
- To remove the audio-extension card back-end

#### To install X.mio 2 in an HP z800

**Figure 85:** PCI and PCIe slots, HP z800

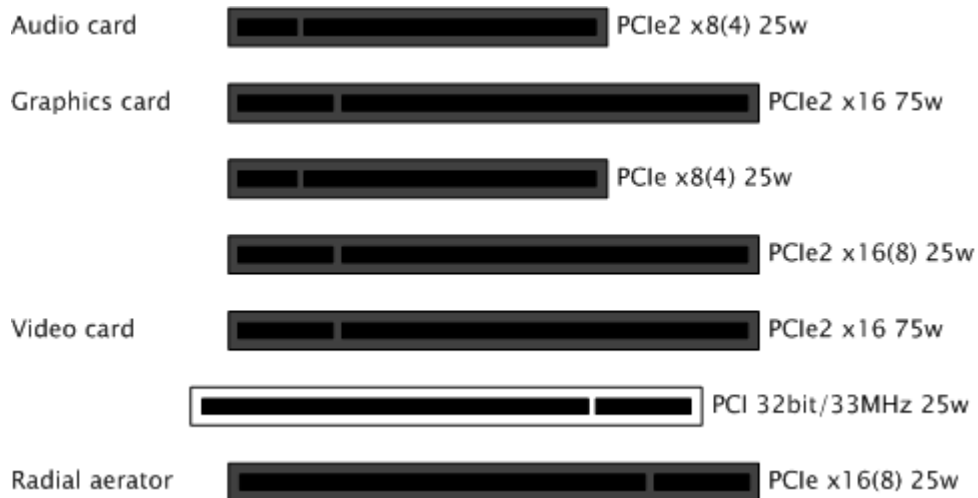

1. Disconnect the power and all other peripherals.
2. Before touching any components make sure you use an anti-static wrist strap to prevent electrostatic discharge.
3. Insert the graphics card in PCIe2 slot number 2 from the top.
4. Insert the Matrox video card into the PCIe2 slot number 5 from the top.
5. Insert a powerful radial-aerator into the PCIe slot number 7 from the top.
6. *Optional:* Insert the [Audio-extension Card](#) into the PCIe2 slot number 1 from the top.
7. *Optional:* Insert the extra slot panel for the X.mio 2/44 card in any of the vacant slots, and connect it to the X.mio 2 card.

-----  
**Note:** A radial-aerator is mandatory as the video card reaches high temperatures during operation.  
-----

### To install X.mio 2 in an HP z800 with two graphics cards


**Figure 86:** PCI and PCIe slots, HP z800



1. Disconnect the power and all other peripherals.
2. Before touching any components make sure you use an anti-static wrist strap to prevent electrostatic discharge.
3. Insert the weaker graphics card in PCIe2 slot number 2 from the top.
4. Insert the stronger graphics card in PCIe2 slot number 5 from the top.
5. Insert the Matrox video card in the PCIe2 slot number 4 from the top.
6. *Optional:* Insert the [Audio-extension Card](#) into the PCIe2 slot number 1 from the top.
7. Tidy up all cables and close the computer's casing.
8. Connect the computer's monitor to the graphic card in slot 2 from the top.
9. Start the machine and in the BIOS (Advanced: Thermal – Full Fan speed) set all fans to run at full speed.
10. Boot and log on to the machine.
11. Install NVIDIA and Matrox drivers.
12. Open the NVIDIA Control Panel, and click on System Information in the bottom left corner and check that both graphic cards are installed and run at PCIe x16 speed.
13. Open Matrox X.info from the system tray and check that the video card runs at PCIe x8 speed.

## To install X.mio 2 in an HP xw8600

**Figure 87:** PCI, PCIe and PCI-X slots, HP xw8600

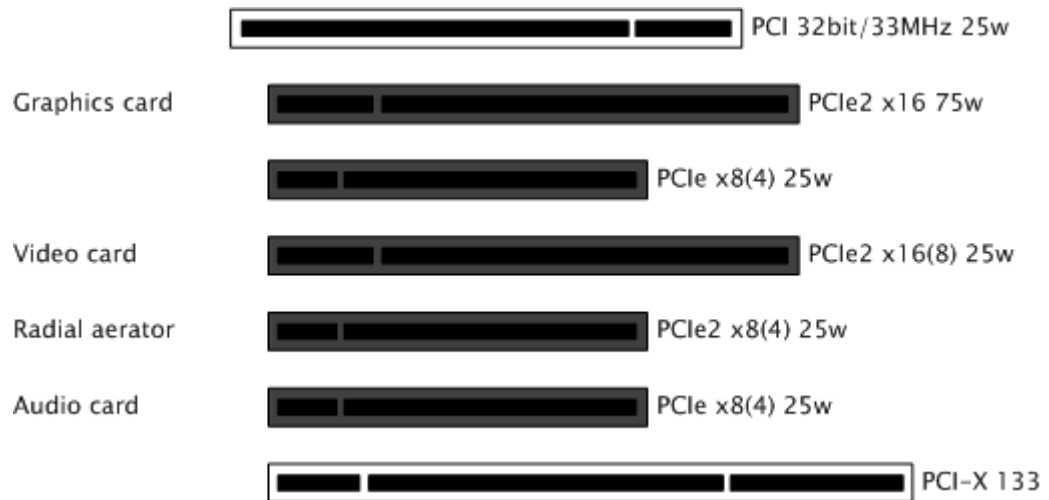


1. Disconnect the power and all other peripherals.
2. Before touching any components make sure you use an anti-static wrist strap to prevent electrostatic discharge.
3. Insert the graphics card in the [PCIe](#) slot number 2 from the top.
4. Insert the Matrox video card in the [PCIe](#) slot number 4 from the top.
5. Insert a powerful radial-aerator in the [PCIe](#) slot number 5 from the top.
6. *Optional:* Insert the [Audio-extension Card](#) in the [PCI-X](#) slot number 6 from the top.
7. *Optional:* Insert the extra slot panel for the X.mio 2/44 card in any of the vacant slots, and connect it to the X.mio 2 card.

**Note:** A radial-aerator is mandatory as the video card reaches high temperatures during operation.

## To install X.mio 1 in an HP xw8600

Figure 88: PCI, PCIe and PCI-X slots, HP xw8600

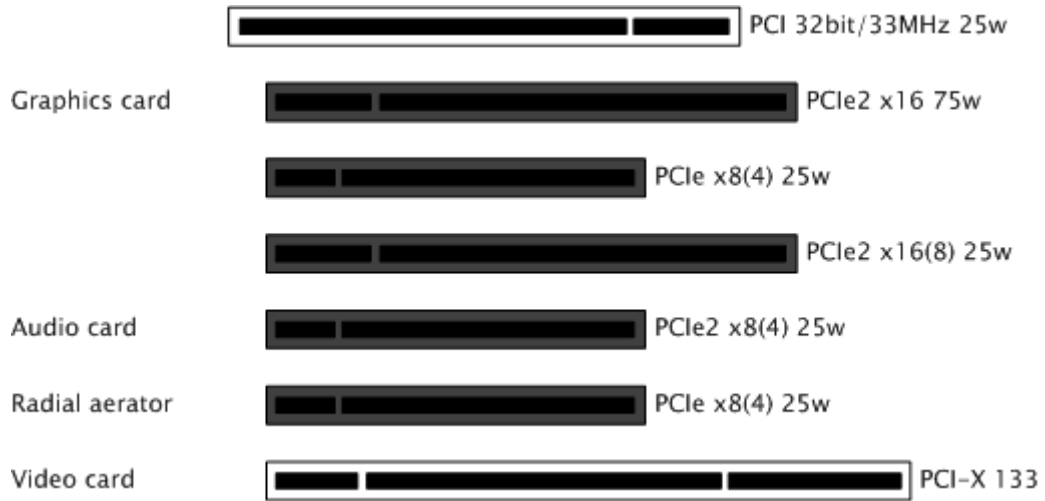

1. Disconnect the power and all other peripherals.
2. Before touching any components make sure you use an anti-static wrist strap to prevent electrostatic discharge.
3. Insert the graphics card in the [PCIe](#) slot number 2 from the top.
4. Insert the Matrox video card into the [PCIe](#) slot number 7 from the top.
5. Insert a powerful radial-aerator into the [PCIe](#) slot number 6 from the top.
6. *Optional:* Insert the [Audio-extension Card](#) into the [PCI-X](#) slot number 5 from the top.

---

**Note:** A radial-aerator is mandatory as the video card reaches high temperatures during operation.

---


## To install X.mio 1 in an HP xw8400

Figure 89: [SATA](#) plug, HP xw8400



1. Disconnect the power and all other peripherals.
2. Before touching any components make sure you use an anti-static wrist strap to prevent electrostatic discharge.
3. Before mounting the video card, the [SATA](#) connector originally connected to the SATA port 0 needs to be reconnected to SATA port 1 in order to make room for the video card.

**Figure 90:** PCI, PCIe and PCI-X slots, HP xw8400

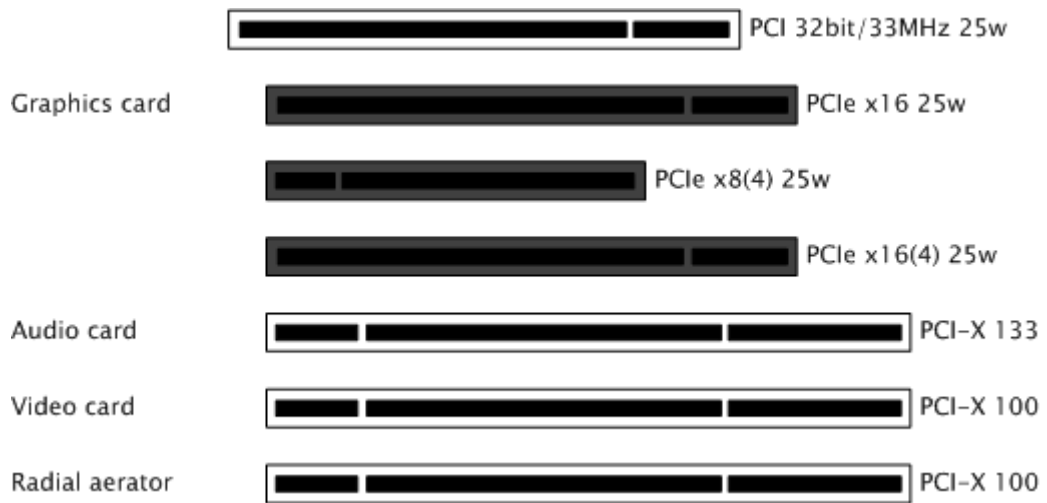

**Note:** For an HP xw8400, the X.mio 24/6000 video card requires a 64bit **PCI-X** slot operating at a minimum of 100 MHz.

4. Insert the graphics card in the **PCIe** slot number 2 from the top.
5. Insert the Matrox video card into the **PCI-X** slot number 6 from the top.
6. Insert a powerful radial-aerator into the **PCI-X** slot number 7 from the top.
7. *Optional:* Insert the **Audio-extension Card** into the **PCI-X** slot number 5 from the top.

**Note:** A radial-aerator is mandatory as the video card reaches high temperatures during operation.

### To install X.mio 1 in an HP xw8200

**Figure 91:** PCI, PCIe and PCI-X slots, HP xw8200



1. Disconnect the power and all other peripherals.
2. Before touching any components make sure you use an anti-static wrist strap to prevent electrostatic discharge.

3. Insert the graphics card in the **PCIe** slot number 2 from the top.
4. Insert the Matrox video card into the **PCI-X** slot number 4 from the top.
5. Insert a powerful radial-aerator into the **PCI-X** slot number 6 from the top.
6. *Optional:* Insert the **Audio-extension Card** into the **PCI** slot number 7 from the top.

---

**Note:** A radial-aerator is mandatory as the video card reaches high temperatures during operation.

---

### To verify the video card installation

While an installation verification is usually performed once all drivers are installed and the hardware is being used, some basic verification can be performed by having a look at the back-end of the installed video card when powering up the machine.

Do the following:

- Look for the blue **LED**-light on the (top) backside of the slot panel, and make sure it is lit as this will indicate if the card is correctly supplied with power.

### To replace a video card

This procedure describes how to remove the video card drivers for a system with an existing video card, or a system that previously has had a video card installed.

1. Remove the video card drivers.
2. Shut down the machine.
3. Mount the replacement video card.
4. Install the video card drivers.

---

**IMPORTANT!** When changing a video card the *Matrox.Devices* setting, set in the configuration file's SECTION MATROX\_CONFIG, will not be updated. The Matrox support will not be set up correctly and the new card will not work. In this case the setting must be removed and Viz Engine restarted such that Viz Engine can insert the new serial number.

---

### To connect the audio-extension card to the video card

**Figure 92:** Connecting the audio-extension card to the video card.




1. Locate the connectors on the audio-extension card labeled A and B.
2. Locate the connectors on the video card labeled A and B.
3. Use the cables to connect A on the audio-extension card to A on the video card, and do the same for the B connectors.



## To remove the audio-extension card back-end

**Figure 93:** Audio-extension card's weak spots

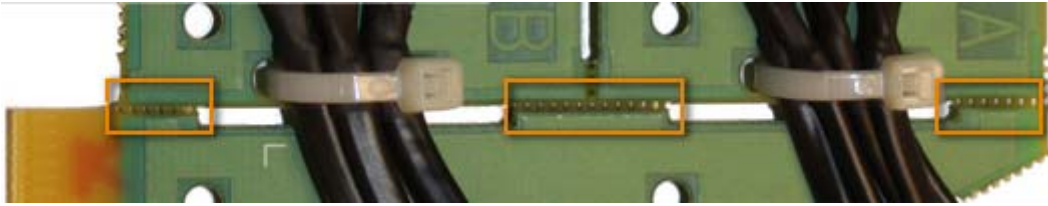

- Locate the [Audio-extension card's weak spots](#), and carefully break the connections.

**CAUTION!** Do not break the weak spots that hold the two remaining pieces together.

### 8.3.4 Driver Installation

The first time the machine is started with the Matrox X.mio card installed, the operating system (OS) will query the user [To install the Matrox X.mio driver](#). It is not recommended to use the OS installation procedure, but to use the supplied driver installer application.

It is required [To remove the Matrox X.mio driver](#) on existing systems before a new driver is installed; however, there are some considerations to note:

- A new driver should not be installed before the new hardware is installed.
- It is recommended **not to use a different driver version** than what was shipped with the video card.
- Using a non-recommended driver version will in most cases cause the system to be **irresponsive**.

**IMPORTANT!** As there are several driver versions available, it is always recommended to contact your local Vizrt representative or Vizrt support ([support@vizrt.com](mailto:support@vizrt.com)) for updates.

**Figure 94:** Matrox system tray icon



After the driver has been installed, a [Matrox system tray icon](#) should be visible. It is possible [To verify the installation using Matrox X.info](#) and/or [To verify the installation using Windows Device Manager](#).

As there are many driver versions available, it is important to compare the versions of those reported by the Matrox X.info utility in order to verify that the [Driver and firmware versions](#) match.

This section contains information on the following topics and procedures:

- [Matrox X.mio 2 Configuration History](#)
- [Matrox X.mio 1 Configuration History](#)
- [Driver and firmware versions](#)
- [To install the Matrox X.mio driver](#)
- [To remove the Matrox X.mio driver](#)

- [To verify the installation using Matrox X.info](#)
- [To verify the installation using Windows Device Manager](#)

### **Matrox X.mio 2 Configuration History**

- **Viz 3.3.x:** 3.3.0 and later
  - **Driver:** DSX.utils 7.5.2-443
- **Viz 3.2.x:** 3.2.2-4068 and later
  - **Driver:** DSX.utils 5.0.3-171

---

**Note:** DSX.utils 5.0.3-171 is required on Windows XP SP3.

---

- **Viz 3.1.x:** 3.1.0-3525 and later
  - **Driver:** DSX.utils 5.0.3-166

### **Matrox X.mio 1 Configuration History**

- **Viz 3.3.x:** 3.3.0 and later
  - **Driver:** DSX.utils 7.5.2-443
- **Viz 3.2.x:** 3.2.2-4068 and later
  - **Driver:** DSX.utils 5.0.3-171

---

**Note:** DSX.utils 5.0.3-171 is required on Windows XP SP3.

---

- **Viz 3.1.x:** 3.1.0-3525 and later
  - **Driver:** DSX.utils 5.0.3-166
- **Viz 3.1.x:** 3.1.0-3525 and later
  - **Driver:** DSX.utils 4.0.0-132(sp1)
  - **Driver:** DSX.utils 4.0.0-136(sp3)
- **Viz 3.1.x:** 3.1.0-3525 and later
  - **Driver:** DSX.utils 2.5.0-673

## Driver and firmware versions

**Table 9:** Driver and firmware versions


Driver version	Primary device firmware	Secondary device firmware
2.5.0-667	165.0	166.0
2.5.0-673 (sp1)	165.0	167.0
4.0.0-126	177.2	178.0
4.0.0-132 (sp1)	177.2	179.0
4.0.0-136 (sp3)	177.2	180.0
5.0.3-166	192.0	195.0
5.0.3-171	192.0	197.0
7.5.2-443 (X.mio 1)	194.1	198.0
7.5.2-443 (X.mio 2)	6.34.0	6.33.0

### To install the Matrox X.mio driver

**Note:** This procedure will use the supplied driver installer application.

1. Start the machine.
2. Cancel any *Found New Hardware Wizard* dialog boxes.
3. Locate the Mio Tools setup executable (*setup.exe*), and start the installation.

**Figure 95:** Example dialog box, Matrox Firmware Updater.

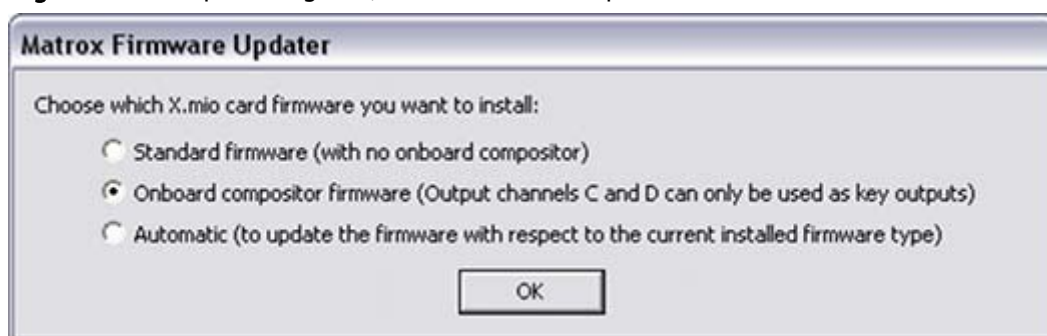

4. In the Matrox Firmware Updater dialog box, select the *Onboard compositor firmware* option, and click OK.
  - The firmware upgrade may take several minutes.


**Note:** X.mio, not X.mio2

5. Once the upgrade is complete, click OK to close the *Setup* dialog box and to restart the system.
  - After the restart the firmware settings will take effect and the setup will continue.

6. Cancel any *Found New Hardware Wizard* dialog boxes.
7. In the *Welcome to Matrox Setup* dialog box, click *Next* to continue the setup.
8. Click *Yes* to acknowledge the license agreement.
9. In the *Select Program Folder* dialog box, click *Next* or select another program folder and click *Next*.
10. In the *Choose Destination Folder* dialog box, click *Next* or select a different destination folder.
  - The installation of driver files may take several minutes.
11. Once the installation is complete, click *OK* to close the *Install Complete* dialog box and to restart the system.

### To remove the Matrox X.mio driver


**Figure 96:** Removing video card drivers, Device Manager

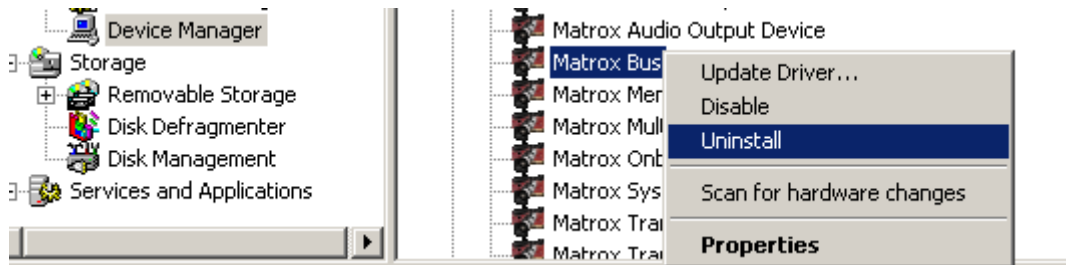

1. Open the Device Manager (see also [To verify the installation using Windows Device Manager](#))
2. Expand the *Matrox Audio/Video devices* node, and select the *Matrox Bus device*.
3. Right-click the *Matrox Bus* device and select *Uninstall*.
4. Click *OK* to confirm the device removal.
5. When the removal is done restart the machine for the changes to take effect.

To verify the installation using Matrox X.info

Figure 97: Matrox X.info.

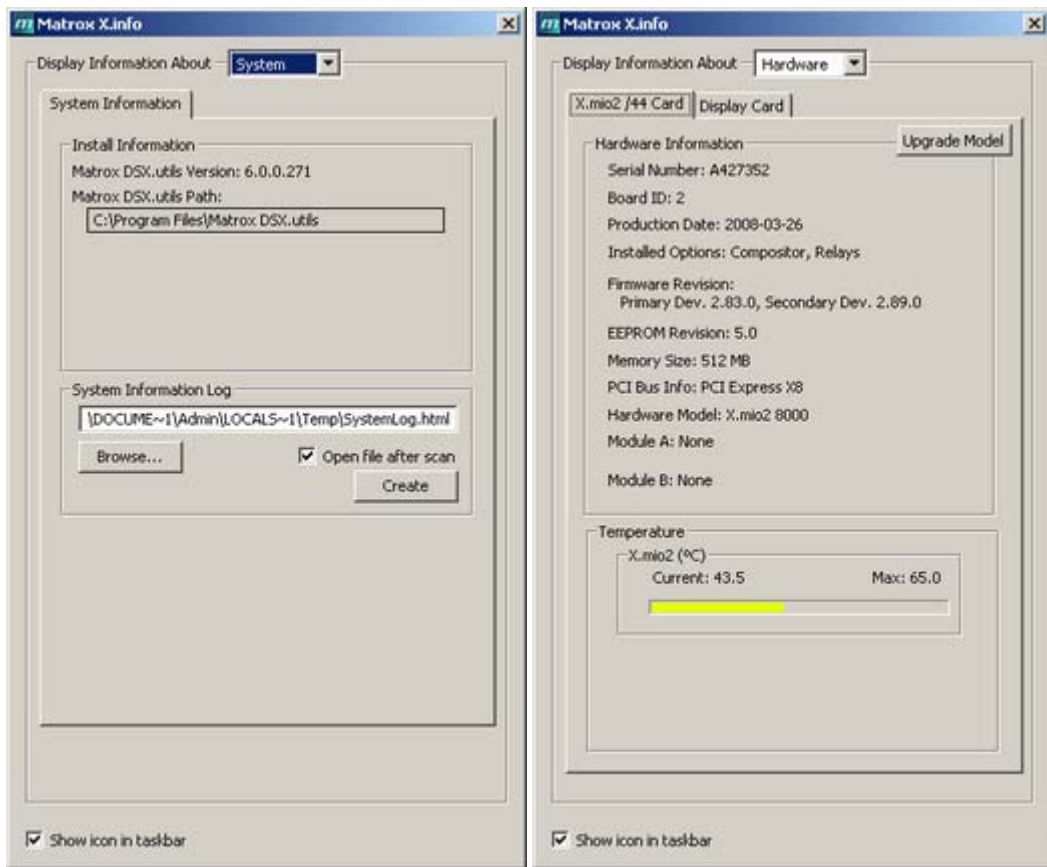


1. Right-click the Matrox system tray icon, and select *Open X.info*.
2. From the *Display Information About* drop-list, select *System* to verify that the correct driver version was installed.

-----  
**IMPORTANT!** Always disable the *Allow hibernation when available* option.  
-----

3. From the *Display Information About* drop-list, select *Hardware*, and then the *X.mio/24 Card* tab to verify the following:
  - See *Installed Options* and verify that the card is taking advantage of the *On Board Compositor*
  - See *PCI Bus Info* and verify that the card was put into a **PCI-X** slot operating at the right frequency.
  - See *Hardware Model* (e.g. X.mio2 8000) to check for **Supported Codecs**.

## To verify the installation using Windows Device Manager

Figure 98: Microsoft Device Manager.

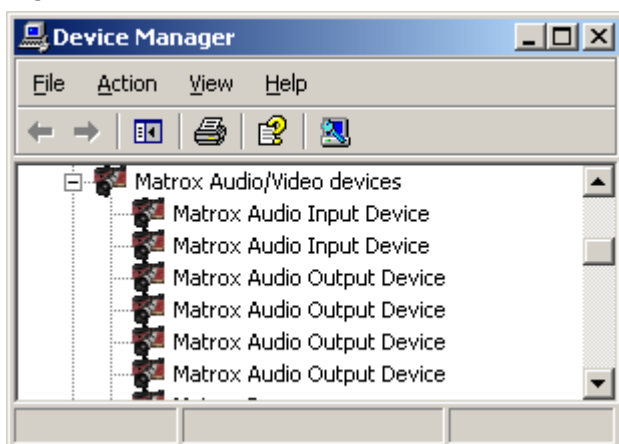

1. Start the Device Manager. Alternatives are:
  - Click *Start*, click *Run*, and then type *devmgmt.msc*, or
  - Right-click *My Computer*, click *Manage*, and then click *Device Manager*, or
  - Right-click *My Computer*, click *Properties*, click the *Hardware* tab, and then click *Device Manager*, or
  - Type the following command at a command prompt: *start devmgmt.msc*
2. Expand the *Matrox Audio/Video devices* node to see the devices installed.

### 8.3.5 Watchdog

A watchdog is essentially a timer that allows a system to continue video pass-through during an application crash or system failure. The X.mio has a built-in watchdog capability; however, the bypass only works for video (including optional embedded audio), while AES audio is not bypassed.

The watchdog is implemented, copper to copper in case of power loss, while a software bypass is performed in a powered machine state. In software bypass mode the incoming video and reference signals must be compliant in order to provide proper watchdog functionality.

### 8.3.6 Licensing

The Matrox X.mio2 includes all SD codecs except D10/D12. This model can be upgraded to any higher class model by performing a license upgrade using the Matrox X.info utility. To upgrade a video card to a higher class model it is necessary to [To generate a Matrox Dongle Information File \(.MDIF\)](#), and then to perform an [To upgrade with a Matrox Dongle Upgrade File \(.MDUF\)](#). It is also possible [To reset to factory settings](#) at any time.

---

**Note:** Driver versions prior to 4.0.0-126 do not support the upgrade and revert features.

---

This section contains the information on the following topics:

- [To generate a Matrox Dongle Information File \(.MDIF\)](#)
- [To upgrade with a Matrox Dongle Upgrade File \(.MDUF\)](#)

- [To reset to factory settings](#)

#### To generate a Matrox Dongle Information File (.MDIF)

1. Open the Matrox X.info utility on the Windows taskbar.
2. Select *Hardware*, and click the *Upgrade Model* button on the right.
3. From the appearing menu, choose *Generate Matrox Dongle Information File (.MDIF)*.
4. Select to save the file to a specified location.
  - Once the file is created a confirmation dialog box will appear.
5. Click OK to dismiss the confirmation dialog box.
6. Locate the file and send it to your local Vizrt representative or to Vizrt support ([support@vizrt.com](mailto:support@vizrt.com)).
  - Once the request to purchase an upgrade has been sent, an [MDUF](#) file will be sent in return from Vizrt.

#### To upgrade with a Matrox Dongle Upgrade File (.MDUF)

1. Open the Matrox X.info utility on the Windows taskbar.
2. Select *Hardware*, and click the *Upgrade Model* button on the right.
3. From the appearing menu, choose *Upgrade Board from Matrox Dongle Upgrade File (.MDUF)*.
4. Click *Browse* to locate and select the .MDUF file to start the upgrade process.
5. Restart the machine for the changes to take effect.

#### To reset to factory settings

1. Open the Matrox X.info utility on the Windows taskbar.
2. Select *Hardware*, and click the *Upgrade Model* button on the right.
3. From the appearing menu, choose *Reset to Factory Settings*.
4. Restart the machine for the changes to take effect.

---

## 8.4 Matrox DSX LE2/CG

Figure 99: Matrox DSX LE2 card



Matrox DSX LE2/CG is HD ready, has 2 video outputs, but no video input. It is used for outputting fill and key signals, and is a useful card in systems that do not need live video input or codec support.

The card comes with a set of breakout and power cables (no break-out box required). The power cables must be connected or else the card will not work. The breakout cable is used for the reference signal ([GenLock](#)) and [AES](#) audio. Fill and key have their own [BNC](#) connectors. The card should be installed in the same slot as the X.mio 2 card, and use the same driver versions as Matrox X.mio2.

### See Also

- [Video Card Installation](#)
  - [To install X.mio 2 in an HP z800](#)
  - [To install X.mio 2 in an HP xw8600](#)
- [Driver Installation](#)
  - [Matrox X.mio 2 Configuration History](#)




## 9 Audio in Viz

This chapter contains the technical description of the Viz Engine 3 audio system, contains the following information:

- [Overview](#)
- [Device Recognition and Selection](#)
- [Timing Behavior and Delay Settings](#)
- [Channel Setup and Clip Channel Routing](#)
- [Audio Plug-in](#)
- [Clip Formats](#)
- [Speaker Names](#)
- [Matrox and Targa Interface](#)

### 9.1 Overview

Figure 100: Schematic layout of the audio system

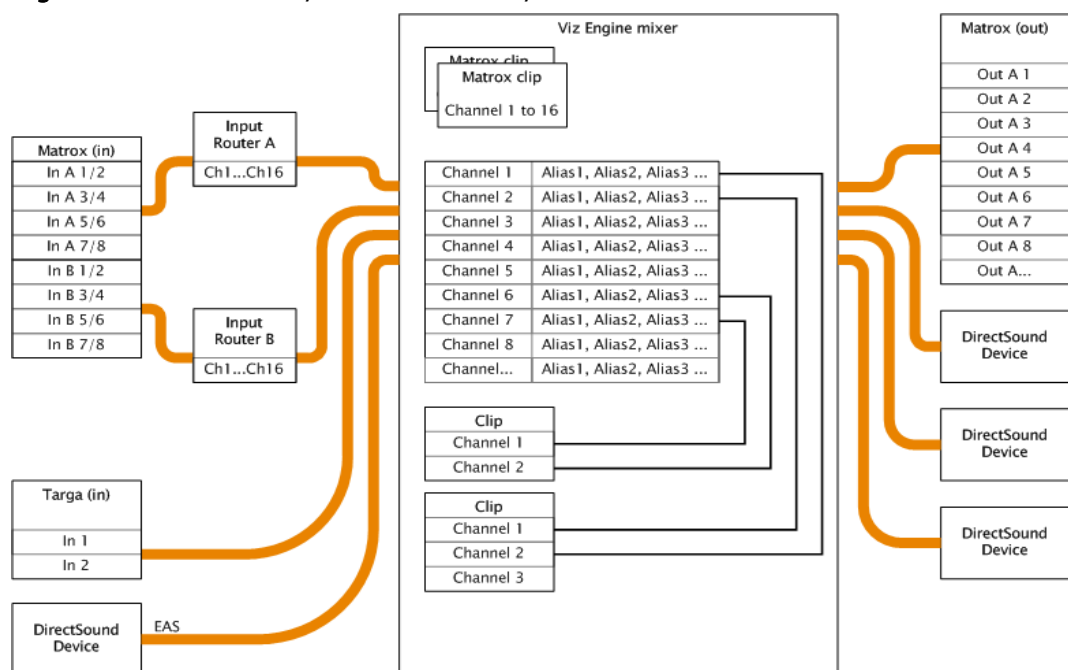

As the above diagram shows, there are three different ways to capture audio in Viz Engine 3.x; through Matrox, Targa or a DirectSound compatible device.

This section contains information on the following topics:

- [Audio Channels](#)
- [Matrox Inputs](#)
- [Targa Inputs](#)
- [DirectShow Filters](#)
- [DirectSound Input](#)

- [Live Input Routing](#)
- [Clip Routing](#)
- [DirectSound Audio Card](#)
- [Targa and Matrox output channels](#)

### 9.1.1 Audio Channels

Internally Viz Engine can use 16 audio channels. The channels are working with floats. Every channel can be named with an arbitrary number of aliases.

### 9.1.2 Matrox Inputs

If a Matrox card is present in the system, 16 input channels are available as AES/EBU input or embedded in the video stream.

### 9.1.3 Targa Inputs

The Targa board offers 2 input channels embedded in the video signal.

### 9.1.4 DirectShow Filters

Viz is able to play any audio file for which a DirectShow filter is installed.

DirectShow provides a set of default filters that install automatically with Microsoft® Windows®. These filters support many data formats while providing a high degree of hardware independence.

All the filters supported by the DirectShow Software Development Kit (SDK) are listed on the Microsoft Developer Network (MSDN) website. If a filter appears in GraphEdit but is not documented by the MSDN online reference, it means the filter has either been installed by a third party or is used internally by some other Microsoft technology. Such filters are not supported by the DirectShow SDK.

### 9.1.5 DirectSound Input

Microsoft DirectSound provides a system to capture sounds from input devices and play sounds through various playback devices using advanced 3-dimensional positioning effects, and filters for echo, distortion, reverberation, and other effects.

A DirectSound compatible card is an alternative for designers that use laptops with no video card installed, or if analog audio is needed.

Viz supports DirectSound compatible cards that support DirectX version 8 or later.

-----  
**Note:** Matrox and Targa are only able to output digital audio.  
 -----

#### Emergency Alert System

The analog audio input through the [DirectSound](#) device is also, for broadcasters in the United States of America, reserved for the Emergency Alert System (EAS).

If the [EAS](#) is activated all audio will be muted and the source from the first analog audio card installed in the system will be played through the Matrox or Targa board.

### 9.1.6 Live Input Routing

On Matrox cards it is possible to route live input channels to any internal Viz Engine channel. It is possible to route more than one channel to an internal channel, but it is not possible to duplicate input channels.

---

**Note:** It is not possible to route Targa input channels.

---

#### See Also

- [Channel Setup and Clip Channel Routing](#)

### 9.1.7 Clip Routing

Audio from Matrox or Targa clips are mapped one by one to the internal Viz Engine channels; hence, no routing is possible.

Audio from audio clips played through the stage is routed to the internal audio channel. This can be done automatic or manual.

#### See Also

- [Live Input Routing](#)
- [Channel Setup and Clip Channel Routing](#)

### 9.1.8 DirectSound Audio Card

Viz Engine 3 is able to use any [DirectSound](#) capable audio card installed in the system. If a Matrox or Targa board is installed on the system, Viz Engine synchronizes the audio output of the [DirectSound](#) cards to the video sync signal coming in to the video card.

#### See Also

- [Device Recognition and Selection](#)

### 9.1.9 Targa and Matrox output channels

After mixing, Viz Engine writes the data of the internal channels one by one to the available output devices. On the direct sound devices you have the possibility to route the Viz Engine channels to any available output channels.


#### See Also

- [Device Recognition and Selection](#)

---

## 9.2 Device Recognition and Selection

Figure 101: [Audio Setup](#), Viz Config

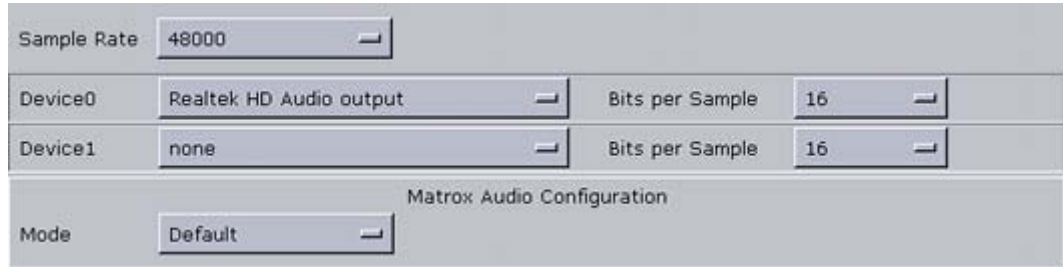

The Viz Engine 3 audio system is able to use any installed DirectSound capable audio device. On every device up to 16 channels can be used.


During the startup process Viz Engine tests all available audio cards installed on the system. It is currently only possible [To manually activate an audio device](#) by configuring the audio device(s) listed in the configuration file's SECTION AUDIO\_CONFIG. By default a one to one channel assignment from the first audio device is done when a new device is selected.

---

## 9.3 Timing Behavior and Delay Settings

In this timing behavior for every activated DirectSound only card can be set. The default values should work for most devices; however, differences may occur.

Figure 102: Latency adjustment on the DirectSound audio device

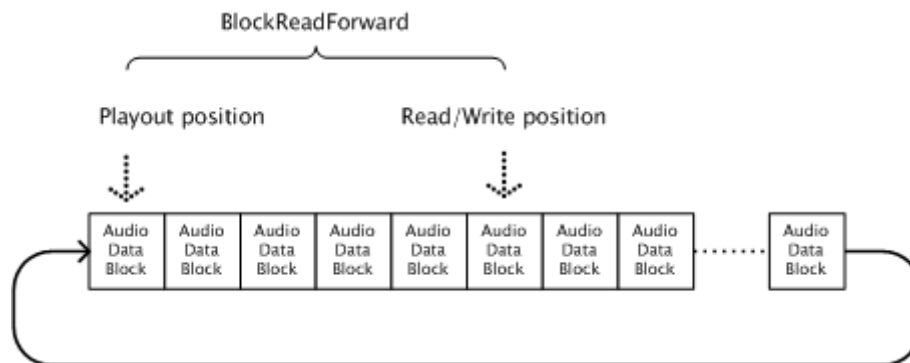


All sound devices use a [Ring buffer](#) that stores data until it is sent out to the audio channels, and this ring buffer is organized in blocks of data. All sound hardware defines a distance in blocks (or bytes) that needs to be maintained. For almost all devices on the market a distance of 6 blocks is sufficient to have a “clean output” without artifacts.

---

**Tip:** Try to decrease the `BlockReadForward` value down to 3 to accomplish less delay for the output. Viz Engine creates a ring buffer of 1 second which is split in 60 blocks. This gives an output delay of 10 milliseconds when the `BlockReadForward` value is 6 (see the configuration file's SECTION AUDIO\_CONFIG).

---

**Figure 103: Matrox input and output buffer**

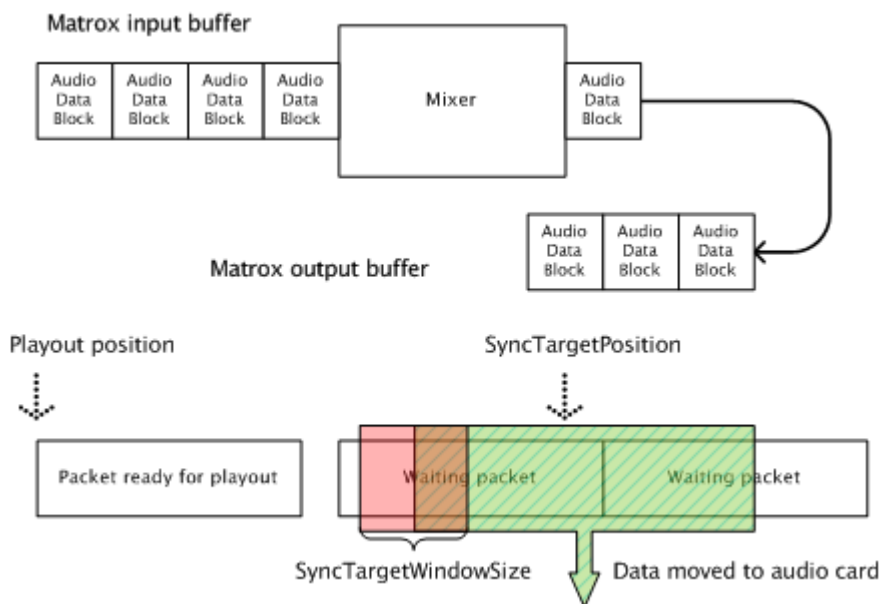

Note that an unsynchronized audio card will always run faster or than a synchronized video or audio card. There is a mechanism needed to keep all audio cards synchronized with each other. The mechanism shown in [Figure 103: Matrox input and output buffer](#), is used by Viz Engine to fulfill this condition.

After mixing the packages received from the Matrox or Targa board the blocks of audio data are moved to the Matrox output buffer. This buffer is organized as a ring buffer and holds one second of data and this is the maximum delay that can be achieved with the described mechanism.

The *SyncTargetPosition* (set in SECTION AUDIO\_CONFIG) defines the position (relative to the play out position of the Matrox or Targa board) where the audio data for the direct sound cards are branched. If the card is running slower than the reference card, the synchronized position will move away from the play out position. If it is faster, the *SyncTargetPosition* will move to the playout position. The *SyncTargetWindowSize* (set in SECTION AUDIO\_CONFIG) defines the border, when Viz Engine starts to resample the direct sound data to bring the *SyncTargetPosition* back in place. The predefined value of 250 samples is a good compromise between performance and quality. If a cheap audio card is used, and small artifacts can be heard, try to increase this value. Good ranges are 250 up to 600.

The *SyncTargetPosition* is used to synchronize the different audio cards to each other. Every audio card shows a specific delay behavior. Increase or decrease this value if one card is faster than the other. If the value is too small artifacts will occur; however, most audio cards work fine with the predefined values. *SyncTargetPosition* and *SyncTargetWindowsSize* (set in SECTION AUDIO\_CONFIG) are configurable settings that can be set separately for every activated audio card.

This section also contains information on the following topics:

- [Channel Device and Channel Track settings](#)

### 9.3.1 Channel Device and Channel Track settings

In Viz Engine it is possible to combine two or more devices for playout of the Viz Engine's internal audio channels.

Note that Viz Engine internally can use up to 16 channels. On many professional multichannel cards the channels are organized in virtual devices with 2 channels. A good example is the following configuration:

```
Available2 = M-Audio Delta 66 1+2
Available3 = M-Audio Delta 66 3+4
```

In Viz Engine it is possible to combine these two devices and create a quad speaker configuration as shown below.

```
VIZChannelDevice0 = M-Audio Delta 66 1+2
VIZChannelDevice1 = M-Audio Delta 66 1+2
VIZChannelDevice2 = M-Audio Delta 66 3+4
VIZChannelDevice3 = M-Audio Delta 66 3+4
VIZChannelDevice4 = Realtek HD Audio output
VIZChannelDevice5 = Realtek HD Audio output
VIZChannelDevice6 = Realtek HD Audio output
VIZChannelDevice7 = Realtek HD Audio output
VIZChannelDevice8 = none
VIZChannelDevice9 = none
VIZChannelDevice10 = none
VIZChannelDevice11 = none
VIZChannelDevice12 = none
VIZChannelDevice13 = none
VIZChannelDevice14 = none
VIZChannelDevice15 = none
VIZChannelTrack0 = 0
VIZChannelTrack1 = 1
VIZChannelTrack2 = 0
VIZChannelTrack3 = 1
VIZChannelTrack4 = 4
VIZChannelTrack5 = 5
VIZChannelTrack6 = 6
VIZChannelTrack7 = 7
VIZChannelTrack8 = 0
VIZChannelTrack9 = 0
VIZChannelTrack10 = 0
VIZChannelTrack11 = 0
VIZChannelTrack12 = 0
VIZChannelTrack13 = 0
VIZChannelTrack14 = 0
VIZChannelTrack15 = 0
```

See also the configuration file's SECTION AUDIO\_CONFIG.

---

## 9.4 Channel Setup and Clip Channel Routing

Channel setups are configured using the [Audio Channels](#) section in Viz Config. In order to get a correct mixing of clip channels to Viz Engine's internal channels it is important to set the audio channels in a correct way.

The [Audio Channels](#) section can for example be used [To add new audio channels](#) and [To add multi-language audio channels](#). The latter allows the same scene with the same audio clips to for example output English, German, French and background music on three different machines. It is also possible to create 3D

and other channel configurations for as many environments as needed. Stereo is configured by default.


From Viz Artist a scene designer is able [To add multiple audio channel configurations](#), [To test audio channel setup](#), and switch between the different local setups matching for example one or several remote Viz Engine audio setups. Configurations can also be tested separately or all together.

This section also contains information on the following procedures:

- [To test audio channel setup](#)

### To test audio channel setup

**Figure 104:** Test Clip, Audio Plug-in

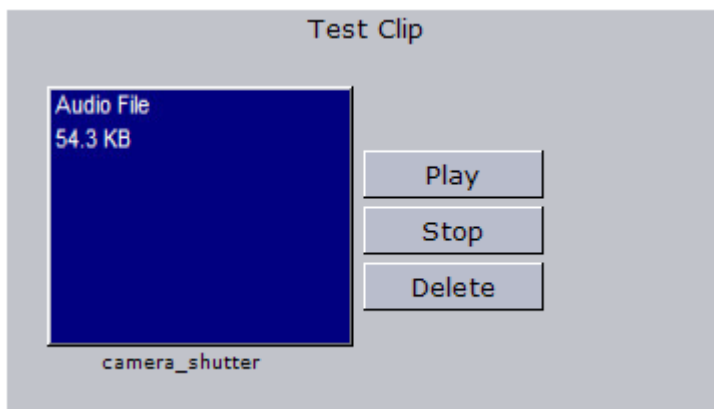

1. Start Viz Artist
2. Create a new scene
3. Add a group container to the scene tree
4. Add the [Audio Plug-in](#) to the group container
5. Open the Audio plug-in editor, and add an audio clip to the *Test Clip* drop-zone, and click Play

---

**Tip:** Always have a set of test clips that will provide audio for the different channel setups.


---

### See Also

- [To add new audio channels](#)
- [To add multi-language audio channels](#)
- [To add multiple audio channel configurations](#)
- [To delete audio channels](#)
- [To manually activate an audio device](#)

---

## 9.5 Audio Plug-in



The Audio plug-in allows a designer [To configure audio channels](#). The Audio plug-in is located in Viz Artist's Function Container section, and can be applied to any container.

This section contains information on the following topics:

- [Audio Clip Mixing Modes](#)

### 9.5.1 Audio Clip Mixing Modes

The Audio plug-in has four different audio clip mixing modes; [Default](#), [FX](#) and [Manual](#). These are all selectable from Viz Artist.

This section contains information on the following topics and procedures:


- [Default](#)
- [FX](#)
- [Manual](#)
- [To configure audio channels](#)

#### Default

The Default mode uses the Channel settings stored in the clip. For example FrontLeft and FrontRight are mixed to the aliases FRONT\_LEFT, FRONT\_RIGHT and so on. See also [Audio Channels](#).

If Viz Engine is configured with fewer channels, Viz Engine mixes the remaining clip channels according to the channel geometry. For example if Viz Engine only has stereo configured, but the clip used has 7.1 surround sound, Viz Engine mixes LeftBack and LeftMiddle to FRONT\_LEFT and so on.

**Figure 105:** Pan slider, Audio plug-in

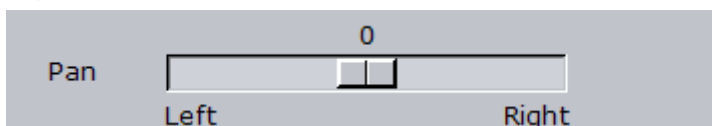

The Pan slider adjusts the volume of the left and right speakers. This is valid for multichannel configurations as well. If the slider is moved to the right in a 7.1 configuration LeftBack, LeftMiddle and LeftFront will be muted.



**Figure 106:** Volume, Audio plug-in



The Volume field controls the overall audio volume of all clip channels.

## FX

In the FX mixing mode Viz Engine mixes the clip in relation to the listener position which can be defined in the fields X and Y. Viz Engine takes the channel geometry into account.

## Manual

In the Manual mixing mode it is possible to manually enter the internal Viz Engine channel target for every clip channel. The mask can hold more than one channel.

The syntax for the string is as follows:

```
CHANNEL_ALIAS%VOLUME+CHANNEL_ALIAS%VOLUME... .
```

or

```
[CHANNEL_ALIAS%VOLOUME] +
```

-----  
**Example:** FrontRight%50+EnglishLeft%20  
-----

## To configure audio channels


1. Add a group container to the Scene tree.

**Figure 107:** Set Key, Viz Artist



2. Click the Set Key button to add a key frame for the container.
3. Add the Audio plug-in to the new group container.
4. Click the Stage (not Server/Stage) button, and select the Dopesheet/Spline view (CTRL+4).

**Figure 108:** Add audio clip, Viz Artist

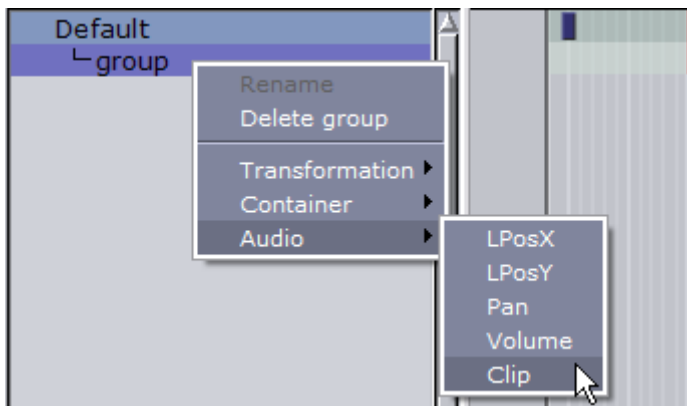

5. Right-click the group node, and select Audio -> Clip from the appearing context menu.
6. Click the Server button to return to the Server view.
7. Click the Audio plug-in icon to open the Audio plug-in editor.
8. Click the Manual button to enable manual configuration of Viz Engine's audio channels.
9. Enter the following channel configurations:
  - Channel 1: FrontLeft
  - Channel 2: FrontRight
  - Channel 3: EnglishLeft
  - Channel 4: EnglishRight
  - Channel 5: FrenchLeft
  - Channel 6: FrenchRight
  - Channel 7: GermanLeft
  - Channel 8: GermanRight
10. Save the scene.

Depending on the settings in the channel configuration a clip will now play the different languages.

---

## 9.6 Clip Formats

The recommended audio format is WAVE. It gives the least decoding time and gives the best performance. Additionally it is the only format that match Viz' support for 16 channels.

Video clips can have interleaved audio in it. The format is limited to 24bit and 48khz. There needs to be at least 2 channels in it as mono is not supported. Again, the maximum channels are 16.

SDI in, break-out box (BOB) out is supported as well as BOB in and SDI out. It can be controlled by the video/clip channels controls.

Viz Engine is able to import and play the following Formats:

- WAVE: Up to 96kHz, 24Bit and 16 Channels.
- MP3: All Formats (Stereo only)
- OggVorbis: All Formats, up to 16 Channels.

### See Also

- [Audio Channels](#)
- [Audio Configuration](#)
- [Matrox](#) configuration interface

---

## 9.7 Speaker Names

Viz Engine knows the following default speaker names:

- FRONT\_LEFT, FRONT\_RIGHT and FRONT\_CENTER
- LOW\_FREQUENCY
- BACK\_LEFT, BACK\_RIGHT, and BACK\_CENTER
- FRONT\_LEFT\_OF\_CENTER and FRONT\_RIGHT\_OF\_CENTER
- SIDE\_LEFT and SIDE\_RIGHT
- TOP\_CENTER, TOP\_FRONT\_LEFT, TOP\_FRONT\_CENTER, TOP\_FRONT\_RIGHT, TOP\_BACK\_LEFT, TOP\_BACK\_CENTER and TOP\_BACK\_RIGHT
- SPEAKER\_RESERVED

### See Also

- [Audio Channels](#)
- [Matrox](#) configuration interface

---

## 9.8 Matrox and Targa Interface

The Matrox card is able to capture and playout using up to 16 channels. The audio can be embedded into the video signal or be an external signal through the [AES/EBU](#) connectors. It depends on the Matrox version which [AES/EBU](#) connectors are present.

On the X.mio cards there are balanced 75 Ohm connectors. On newer cards, 110Ω connectors are used.

Viz Engine is only able to mix [PCM](#) data. Dolby Digital can only be used in the MATROX\_LOOP Mode, which allows no mixing (see also SECTION AUDIO\_CONFIG's *MatroxAudioMode* settings).

On the Targa board only embedded audio in Stereo is supported.

This section also contains information on the following procedure:

- [To enable Matrox or Targa audio](#)

### To enable Matrox or Targa audio

1. Start Viz Config
2. In the [Video Board](#) section activate at least one of the “Enable embedded audio on Input1” or “Enable embedded audio on Input2” buttons.
  - This needs to be done for [AES/EBU](#) audio as well.

3. In the [Audio Setup](#) section choose one of the following Matrox audio modes: Embedded, AES, Embedded AES, AES Embedded or Loop.

---

**Note:** These settings are used for Matrox cards only. On Targa boards the only available mode is *Embedded*.

---

4. Click Save and close Viz Config.
5. Open the configuration file and check that the following values are set in SECTION AUDIO\_CONFIG:
  - Matrox0.AudioOut.Enable = 1
  - Matrox0.AudioOut.Delay = 4
  - Matrox0.AudioIn1.AudioEnable = 1
  - Matrox0.AudioIn1.AudioChannels = 2
  - Matrox0.AudioIn1.AudioDelayDVE = 4
6. If required, also change these:
  - Matrox0.AudioIn2.AudioEnable = 1
  - Matrox0.AudioIn2.AudioChannels = 2
  - Matrox0.AudioIn2.AudioDelayDVE = 4

---

## 10 Legacy Cards

This section describes hardware installations that are not part of the default setup.

This section contains information on the following topics:

- [Legacy Video Cards](#)
- [LPT Controller for a Viz License Dongle](#)

---

### 10.1 Legacy Video Cards

The following sections describe legacy video cards that no longer are delivered by Vizrt. The information briefly describes what the cards are used for and gives a short configuration history overview.

This section contains the information on the following topics:

- [BlueFish444 Iridium|SD](#)
- [Digital Voodoo D1 Desktop](#)
- [Digital Voodoo DeepBlue LT](#)
- [Digital Voodoo Red Devil V3 alias IO/2020](#)
- [Pinnacle Targa 3200](#)

#### 10.1.1 BlueFish444 Iridium|SD

**Figure 109:** BlueFish444 Iridium|SD



Viz 3 currently support two types of BlueFish444 cards in addition to the Iridium|SD; The latest [BlueFish444 SD Lite Pro Express](#) and the older [Digital Voodoo DeepBlue LT](#) card.

BlueFish444 Iridium|SD is the native successor of the [Digital Voodoo DeepBlue LT](#) and the predecessor of [BlueFish444 SD Lite Pro Express](#), providing Fill, Key, [GenLock](#) and Composite Fill connectors. The Iridium|SD is fully compatible with existing DeepBlue-LT installations.


The card is mostly used with Viz Trio-NV which basically is a system with the ability to run a Viz Trio client with local preview and video output on a single machine; hence, there is no video input or video playback support as with the [Matrox X.mio 1 and X.mio 2](#). The local preview can render a different scene than the one being output on video. The card is typically seen on HP xw4600.

This section contains information on the following topics:

- [Connectors](#)
- [Driver Installation](#)

## Connectors

**Figure 110:** BNC Connectors, BlueFish444 Iridium|SD

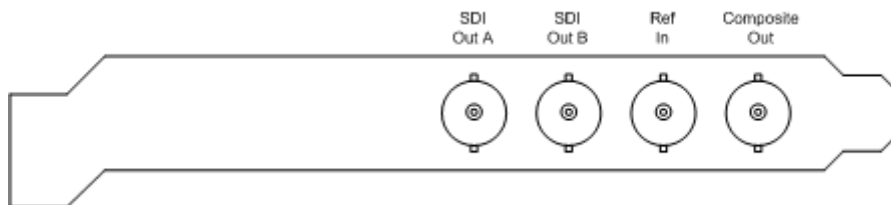

The [BNC](#) connectors from left to right are:

- **SDI Out A (Fill)** – SDI 4:2:2/4:4:4/Video
- **SDI Out B (Key)** – SDI 4:2:2/4:4:4/Video
- **Ref In** – Analog [GenLock](#) input
- **Composite Out** – Composite fill output

## Driver Installation

The driver installation works the same way as for DeepBlue-LT cards. Use driver version 3.1 available on [Vizrt's FTP](#) server in order to ensure proper functionality and ring buffer support.

Iridium|SD is fully compatible with existing DeepBlue-LT installations and can be used with any recent Viz version supporting the older DeepBlue-LT device.

- **Viz 3.x:** 3.2.7 and later
  - **Driver:** Bluefish444 v5.9.0.25
- **Viz 3.x:** 3.2.2 and later
  - **Driver:** Bluefish444 v5.7.6

---

**Note:** Since Viz Engine 3.2.7 and 3.3.0 the Bluefish444 v5.9.0.25 driver is required for all Digital Voodoo / Bluefish cards.

---

- **Viz 3.x** – 3.1.0-3532 and later
  - **Driver** – Bluefish444 v3.1

---

**CAUTION!** Only Bluefish444 v3.1 is guaranteed to support an adequate ringbuffer size. Any other driver will cut down or completely disable ringbuffer support.

---

## 10.1.2 Digital Voodoo D1 Desktop

Digital Voodoo D1 Desktop is an older SD board that is rarely used, but sometimes used with IBM Z-Pro 6221, IBM 6223 and HP xw8200.

### Configuration History

- **Driver** – VizrtVideo 2.3
  - **Revision** – V1 and V2

---

**CAUTION!** Older board revisions (V1) are incompatible with recent systems like HP xw8200, xw8400, and IBM Z-Pro 6223. Symptoms are **BSOD**, machine freeze at Viz startup or corrupted live-video in Viz.

---

### See Also

- [BlueFish444 SD Lite Pro Express](#)
- [BlueFish444 Iridium|SD](#)

## 10.1.3 Digital Voodoo DeepBlue LT

Digital Voodoo DeepBlue LT was Vizrt's standard board for SD Viz Trio NV (no video) systems. Typically used with HP xw4200, xw4300 and xw4400.

### Configuration History

- **Viz 3.x:** 3.2.7 and later
  - **Driver:** Bluefish444 v5.9.0.25
- **Viz 3.x:** 3.2.2 and later
  - **Driver:** Bluefish444 v5.7.6

---

**Note:** Since Viz Engine 3.2.7 and 3.3.0 the Bluefish444 v5.9.0.25 driver is required for all Digital Voodoo / Bluefish cards.

---

- **Viz 3.x** – 3.1.0–3525 and later
  - **Driver** – BlueFish444 v3.1

---

**CAUTION!** Only BlueFish444 v3.1 is guaranteed to support an adequate Ringbuffer-size. Any other driver will cut down or completely disable ring buffer support.

---

### See Also

- [BlueFish444 SD Lite Pro Express](#)
- [BlueFish444 Iridium|SD](#)

## 10.1.4 Digital Voodoo Red Devil V3 alias IO/2020

Digital Voodoo Red Devil was Vizrt's standard board for SD virtual sets and Viz Arena. Typically used with IBM Z-Pro 6221, IBM ZPro 6223, and HP xw8200.

### Configuration History

- **Driver** – VizrtVideo 2.3
  - **Revision** – V3

### See Also

- [DVS Centaurus II](#)

## 10.1.5 Pinnacle Targa 3200

Pinnacle Targa 3200 was Vizrt's standard board for SD Viz systems until 2007, and was typically used with IBM ZPro 6221, IBM Z-Pro 6223 and HP xw8200.

### Configuration History

- **Driver** – CODI v2.42
  - **Revision** – 3213. Revision 3213 crashes the machine when used with CODI v2.41rc13.
- **Driver** – CODI v2.41rc13
  - **Revision** – 3212, 3214. Installation of CODI Compatibility Patch for revision 3214 is no more required.
- **Driver** – CODI v2.42
  - **Revision** – 3212, 3213, 3214. Installation of CODI Compatibility Patch is required.
- **Driver** – CODI v2.2 RC4
  - **Revision** – 3212, 3213.

### See Also


- [Matrox X.mio 1 and X.mio 2](#)



---

## 10.2 LPT Controller for a Viz License Dongle

Figure 111: Exsys EX-41011 LPT Controller

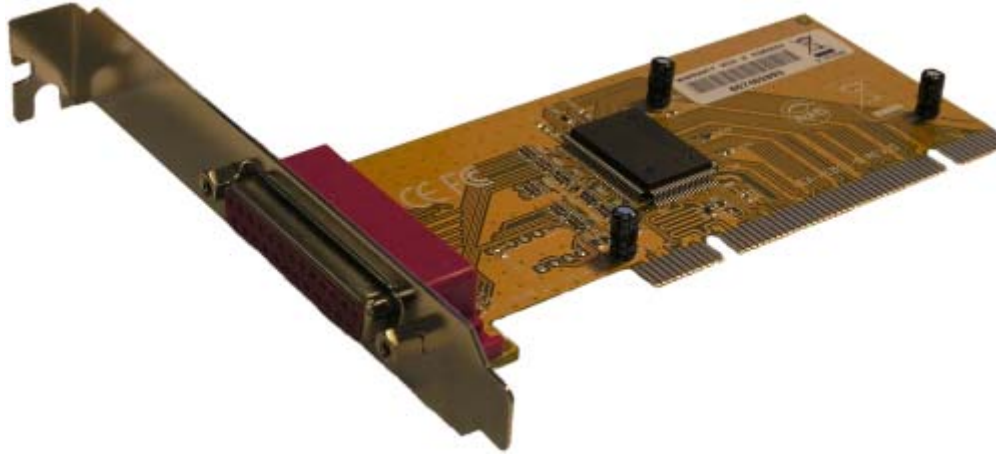

In order to provide recent render engines of type HP xw8600 with support for parallel dongles, an additional LPT controller board needs to be installed in the machine. For this purpose the topmost 32bit [PCI](#) slot should be used.

### To install an LPT controller card

Adding the LPT controller card will enable Viz to read the license from a parallel port dongle.

1. Power down the system and prepare it for hardware installation as documented in the manufacturer's manual(s).
2. Install the controller in the xw8600's topmost standard [PCI](#) (32bit) slot.
3. Turn on on the machine.
4. After the operating system has started up, insert the LPT controller driver disk and install as denoted in the manufacturer's documentation.
5. After installation has finished, do not modify any device configurations, but instead simply use the default settings automatically applied at installation time.

---

# 11 Glossary

This section describes words and acronyms that are used throughout the documentation.

Table 10: Glossary

Name (acronym)	Description
5.1	Delivers five audio channels and 1 Low-frequency Effect (LFE) channel from a 6 channel source.
6DoF	Six degrees of freedom (6DoF) is used in interactive scenes to move and rotate objects in 3D on a defined grid.
7.1	Delivers seven audio channels and one Low-frequency Effect (LFE) channel from an 8 channel source.
AES	Audio Engineering Society (AES). Also known for the digital audio standard frequently called AES/EBU, officially known as AES3, is used for carrying digital audio signals between various devices; hence, the term AES/EBU connectors.
AGP	Accelerated Graphics Port (AGP) is a high-speed point-to-point channel for attaching a graphics card to a computer's motherboard, primarily to assist in the acceleration of 3D computer graphics.
Anamorphic widescreen	Anamorphic widescreen is a videographic technique utilizing rectangular (wide) pixels to store a widescreen image to standard 4:3 aspect ratio.
Anti aliasing	Anti-aliasing is the technique of minimizing the distortion artifacts known as aliasing when representing a high-resolution signal at a lower resolution.
Audio codec	An audio codec is a hardware device or a computer program that compresses and decompresses digital audio data according to a given audio file format or streaming audio format.
AVI	Audio Video Interleave (AVI) is a multimedia container format introduced by Microsoft in November 1992 as part of its Video for Windows technology.
BIOS	Basic Input/Output System (BIOS) is a system that defines the firmware interface. The initial function of the BIOS is to identify, test, and initialize system devices, and prepare the machine into a known state.
BNC	The BNC (Bayonet Neill Concelman) connector is a very common type of RF connector used for terminating coaxial cable.

**Table 10: Glossary**

Name (acronym)	Description
BSOD	The Blue Screen of Death (also known as a stop error or bluescreen) is an error screen displayed by some operating systems, most notably Microsoft Windows, after encountering a critical system error which can cause the system to shut down, to prevent damage.
Configuration file	Holds all configurable settings used by Viz Engine and various integrated applications. The configuration file can be found under Viz Engine's installation directory; C:\Program Files\vizrt\viz3\.
CVBS	Composite video (aka CVBS or Composite Video Burst Signal) is the format of an analog television (picture only) signal before it is combined with a sound signal and modulated onto an RF carrier. It is a composite of the three source signals Y, U and V (YUV) with sync pulses.
D10	Television: Type D-10 Stream Specifications: MPEG-2 4:2:2P @ ML for 525/60 and 625/50. SMPTE D10 (356M) is a professional video compression format composed of MPEG-2 Video 4:2:2 Intra-frame (I-frame) only and 8 channel AES3 audio streams.
D12	Television: 6.35-mm Type D-12 Component Format: Digital Recording at 100 Mb/s 1080/60i, 1080/50i, 720/60p. Also known as Digital Betacam.
DIF	DV-DIF (Digital Video Digital Interface Format) is an interface format for DV, the Digital Video family of related video encodings (DV, DVCAM, and DVCPRO). DV Audio/Video data can be stored as raw DV data stream file (data is written to a file as the data is received over FireWire, file extensions are .dv and .dif) or the DV data can be packed into AVI container files.
Digital Voodoo	Digital Voodoo is a broadcast capture and playback card used for uncompressed Standard Definition 10-bit SDI solution on Macintosh computers.
DirectSound	DirectSound is a software component of the Microsoft DirectX library, that resides on a computer with the Windows operating system. It provides a direct interface between applications and the sound card drivers on Windows. It provides audio data to the sound card, recording and mixing sound; adding effects to sound for example reverb, echo, flange; using hardware controlled buffers for extra speed; positioning sounds in 3D space (3D audio spatialization), capturing sounds from a microphone or other input and controlling capture effects during audio capture.
DV	Digital Video.

**Table 10: Glossary**

<b>Name (acronym)</b>	<b>Description</b>
DV25	DV25 applies a 5:1 compression and a 4:1:1 color space and achieves a fixed data rate of 25Mbps.
DV50	DV50 applies a 3.3:1 compression and a 4:2:2 color space and achieves a fixed data rate of 50Mbps.
DVCAM	Sony's DVCAM is a professional variant of the DV standard that uses the same cassettes as DV and MiniDV, but transports the tape 33% faster.
DVCPRO	Panasonic's DVCPRO family is specifically created for electronic news gathering use, with good linear editing capabilities and robustness.
DVI	Digital Visual Interface (DVI) is a video interface standard designed to maximize the visual quality of digital display devices such as flat panel LCD computer displays and digital projectors.
EAS	The Emergency Alert System (EAS) is a national warning system in the United States of America (USA). The official EAS enables the President of the USA to speak to the citizens of the USA within 10 minutes.
EBU	European Broadcasting Union. See also <a href="#">AES</a> .
GenLock	Genlock (Generator Lock) is a common technique where the video output of one source, or a specific reference signal, is used to synchronize other television picture sources together. GenLock type is set in Viz Config's Video Output section.
Glyph	A glyph is an element of writing. Glyphs may also be <a href="#">Ligatures</a> , that is, compound characters, or diacritics.
HD	High-definition television or HDTV is a digital television broadcasting system with higher resolution than traditional television systems (standard-definition TV, or SDTV).
I/O	I/O is short for Input/Output, and is a common term used for hardware connectors.
IEEE	The Institute of Electrical and Electronics Engineers, Inc.
IRE	Institute of Radio Engineers. Is now part of the <a href="#">IEEE</a> .

Table 10: Glossary

Name (acronym)	Description
IRE unit	<p>An <a href="#">IRE</a> unit is used in the measurement of composite video signals.</p> <p>The range of a video signal is defined to be 1.0 volts peak to peak (p/p) which again is divided into the picture and the synchronization portion of the signal. The picture portion is defined as 0 IRE to 100 IRE. The synch portion is defined as -40 IRE to 0 IRE; hence, the total range of IRE values is 140 units making each IRE unit equivalent to 1/140 volts.</p> <p>Picture sources are typically set with <i>black</i> somewhere between 7.5 to 10 IRE. The maximum signal brightness is usually set to just below 100 IRE.</p> <p>A third signal, the burst signal, is present from +20IRE to -20IRE. It is a short sample of the color subcarrier frequency, and is used to control how colors are displayed on screen.</p>
LED	Light-emitting-diode.
Ligature	In writing and typography, a ligature occurs where two or more graphemes (fundamental unit in a written language) are joined as a single <a href="#">Glyph</a> .
Lip-sync	Lip-sync (short for lip synchronization) is a technical term for matching lip movements with voice. The term refers to a technique in movie and broadcast production for synchronization of visual and audio signals.
LTC	Linear TimeCode. See also <a href="#">VITC</a> .
MCX	MCX connectors are coaxial RF connectors. They use a snap-on interface and usually have a 50 Ohm impedance. They offer broadband capability from direct current (DC) to 6 GHz.
MDIF	<p>Matrox Dongle Information File (.MDIF) can be generated and sent to Vizrt in order to upgrade the Matrox X.mio video card to a higher class model.</p> <p>See also how <a href="#">To generate a Matrox Dongle Information File (.MDIF)</a>.</p>
MDUF	<p>Matrox Dongle Upgrade File (.MDUF) is the file, provided by Vizrt, that will upgrade the Matrox X.mio video card to a higher class model.</p> <p>See also how <a href="#">To upgrade with a Matrox Dongle Upgrade File (.MDUF)</a>.</p>
Mono	Monaural (often shortened to mono) sound reproduction is single-channel.

Table 10: Glossary

Name (acronym)	Description
MPEG	Moving Picture Experts Group, is the name of a family of standards used for coding audio–visual information (e.g., movies, video, music) in a digital compressed format.
MXF	Material Exchange Format (MXF) is an object–based file format that wraps video, audio, and other bitstreams, optimized for content interchange or archiving by creators and/or distributors, and intended for implementation in devices ranging from cameras and video recorders to computer systems.
NTSC	National Television System Committee (NTSC) is the analog television system used in the north, mid and to some extent in south America and also in some Asian countries.
OB	Outside Broadcasting is the production of television or radio programmes (typically to cover news and sports events) from a mobile television studio.
OP–Atom	<a href="#">MXF</a> Operational Pattern Atom. OP–Atom was designed to address the needs of non–linear video and audio editing. Reference: <a href="#">SMPTE 390M–2004</a> Television – Material Exchange Form at ( <a href="#">MXF</a> ) – Specialized Operational Pattern “Atom” (Simplified Representation of a Single Item).
PAL	Phase Alternating Line, is a color–encoding system used in broadcast television systems in large parts of the world.
PCI	PCI Local Bus (usually shortened to PCI), or Conventional PCI, specifies a computer bus for attaching peripheral devices to a computer motherboard.
PCIe	PCI Express was designed to replace the general–purpose PCI (Peripheral Component Interconnect) expansion bus, the high–end <a href="#">PCI–X</a> bus and the AGP graphics card interface.
PCI–X	PCI–X (Peripheral Component Interconnect eXtended) is a computer bus and expansion card standard that enhanced the PCI Local Bus for higher bandwidth demanded by servers.
PCM	Pulse–code modulation (PCM) is a digital representation of an analog signal.

**Table 10: Glossary**

<b>Name (acronym)</b>	<b>Description</b>
Quad	Quadraphonic (or quadrophonic) sound – also called 4.0 stereo – uses four channels in which speakers are positioned at the four corners of the listening space, reproducing signals that are (wholly or in part) independent of one another.
Rack unit	A rack unit or U (less commonly, RU) is a unit of measure used to describe the height of equipment intended for mounting in a 19-inch rack or a 23-inch rack (the dimension referring to the width of the rack).
RF	A radio frequency (RF) connector is an electrical connector designed to work at radio frequencies in the multi-megahertz range.
RGB	RGB stands for Red Green Blue, and its color model is an additive color model in which red, green, and blue light are added together in various ways to reproduce a broad array of colors.
RGBA	RGBA stands for Red Green Blue Alpha. It uses the RGB color model with extra information, and is normally used as an transparency/opacity channel.
Ring buffer	A circular buffer or ring buffer is a data structure that uses a single, fixed-size buffer as if it were connected end-to-end. This structure lends itself easily to buffering data streams.
Safe Area (aka Action Safe Area)	Depending on how a television set is adjusted, viewers can see a larger area than the <a href="#">Title Area (aka Title Safe Area)</a> . The safe area is in Viz Artist shown as a green rectangle in the preview window. This area can be considered a “safe margin” to create a buffer and avoid that elements are butted up against the edge of the screen. However, the area outside the safe area is often used to place graphics (for example tickers that run horizontally across the screen) that butt up against the edges of the screen.
SATA	The Serial Advanced Technology Attachment (SATA) computer bus has the primary function of transferring data between the motherboard and mass storage devices (such as hard disk drives and optical drives) inside a computer.
SD	Standard-definition television or SDTV refers to television systems that have a resolution that meets standards but not considered either enhanced definition or high definition.
SDI	Serial digital interface (SDI) refers to a family of video interfaces standardized by the <a href="#">SMPTE</a> .

**Table 10:** Glossary

Name (acronym)	Description
SECAM	Séquentiel couleur à mémoire, French for "Sequential Color with Memory"), is an analog color television system first used in France.
Shader	<p>A shader in the field of computer graphics is a set of software instructions, which is used by the graphic resources primarily to perform rendering effects. A shader is a part of the renderer, which is responsible for calculating the color of an object; hence, the Viz Engine renderer has a shader that handles the video input (normally provided as interlaced YUV images).</p> <p>To be able to use the YUV images in a CG scene they need to be RGB, and in addition they need to be deinterlaced. All this is done by Viz Engine's shader.</p> <p>The shader not only takes two, but four input images when it does the color conversion from YUV to RGB and the deinterlacing. As this is a very heavy process it can only be done in SD.</p>
SMPTE	Society of Motion Picture and Television Engineers.
SPG	A sync pulse generator (SPG) is a special type of generator which produces synchronization signals, with a high level of stability and accuracy. These devices are used to provide a master timing source for a video facility.
Stereo	Stereophonic sound (often shortened to Stereo) is the reproduction of sound, using two or more independent audio channels.
Sub-D	Sub-D, D-subminiature or D-sub is a common type of electrical connector used particularly in computers.
Surround sound	See <a href="#">Quad</a> , <a href="#">5.1</a> and <a href="#">7.1</a> .
Title Area (aka Title Safe Area)	The title area is in Viz Artist shown as a purple rectangular area which is far enough in from the four edges, such that text or graphics show neatly: with a margin and without distortion.
Universal Naming Convention (UNC)	<p>Specifies a common syntax to describe the location of a network resource, such as a shared file, directory, or printer.</p> <pre>\\ComputerName\SharedFolder\Resource</pre>
VBI	Vertical blanking interval (VBI) is the time difference between the last line of one frame or field of a raster display, and the beginning of the next.
Video codec	A video codec is a device or software that enables video compression and/or decompression for digital video.



**Table 10: Glossary**

<b>Name (acronym)</b>	<b>Description</b>
VITC	Vertical Interval TimeCode. See also <a href="#">LTC</a> and <a href="#">VBI</a> .
Writing system	A writing system is a type of symbolic system used to represent elements or statements expressible in language.
XLR	The XLR connector is an electrical connector, and a standard for broadcast audio equipment. The 3-pin XLR3 is used as a balanced audio connector for both analog and digital audio. Note that Viz Engine's Matrox board only supports digital audio.
YUV	YUV is a color space typically used as part of a color image pipeline. Y' stands for the luma component (the brightness) and U and V are the chrominance (color) components. The Y'UV color model is used in the NTSC, PAL, and SECAM composite color video standards.